
Ref. No. 4095 082008

### **ONKYO** SERVICE MANUAL

# AV RECEIVER MODEL TX-NR906 MODEL TX-NA906

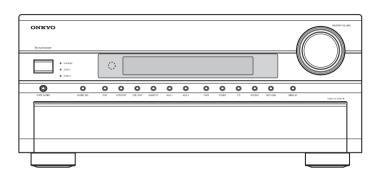

RC-687M

#### TX-NR906 Black, Golden and Silver models

| B MDC, S MDD, G MDT | 120V AC, 60Hz        |
|---------------------|----------------------|
| B MMP, S MMP        | 220-240V AC, 50Hz    |
| S MMT, G MMT        | 220-240V AC, 50/60Hz |

### TX-NA906 Black, Golden models


| B MMR. G MMR         | 220-240V AC, 50/60Hz  |
|----------------------|-----------------------|
| B IVIIVIK, G IVIIVIK | 220-240 V AC, 30/00HZ |


### SAFETY-RELATED COMPONENT WARNING!!


COMPONENTS IDENTIFIED BY MARK ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.


MAKE LEAKAGE-CURRENT OR RESISTANCE
MEASUREMENTS TO DETERMINE THAT EXPOSED
PARTS ARE ACCEPTABLY INSULATED FROM THE
SUPPLY CIRCUIT BEFORE RETURNING THE
APPLIANCE TO THE CUSTOMER.



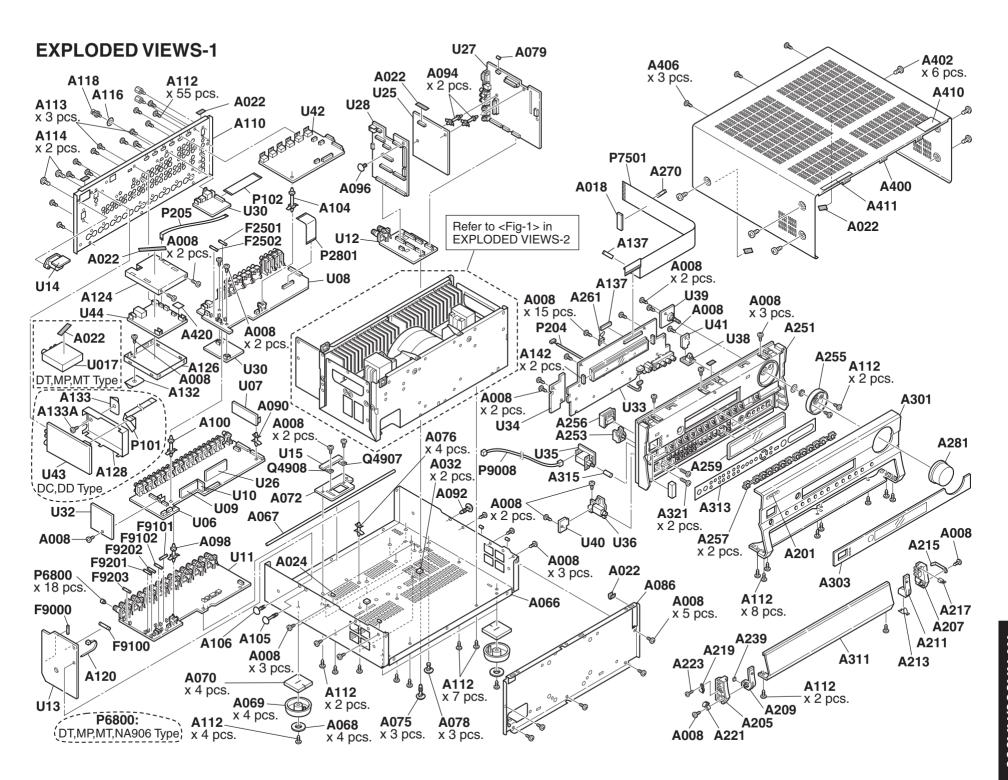

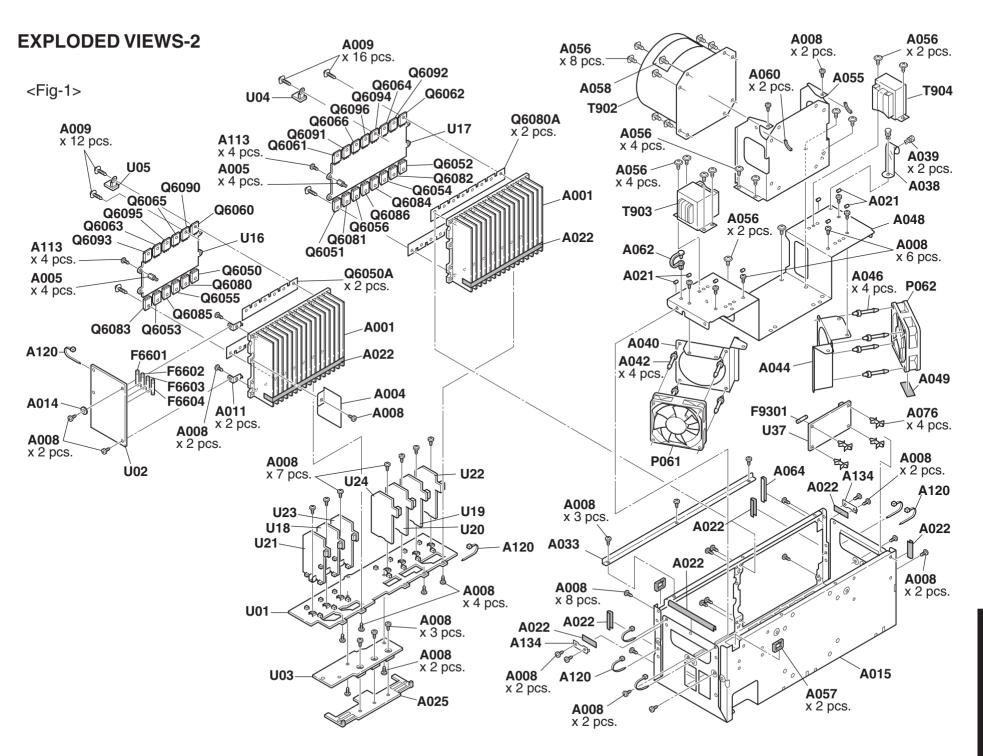

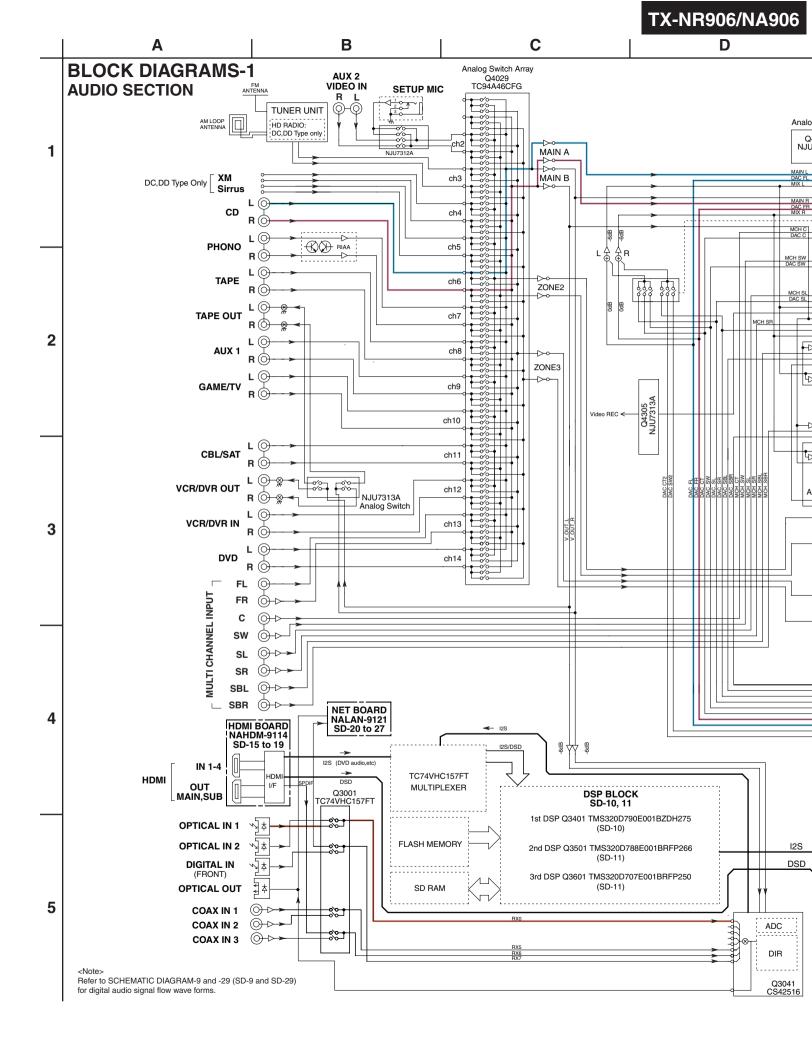

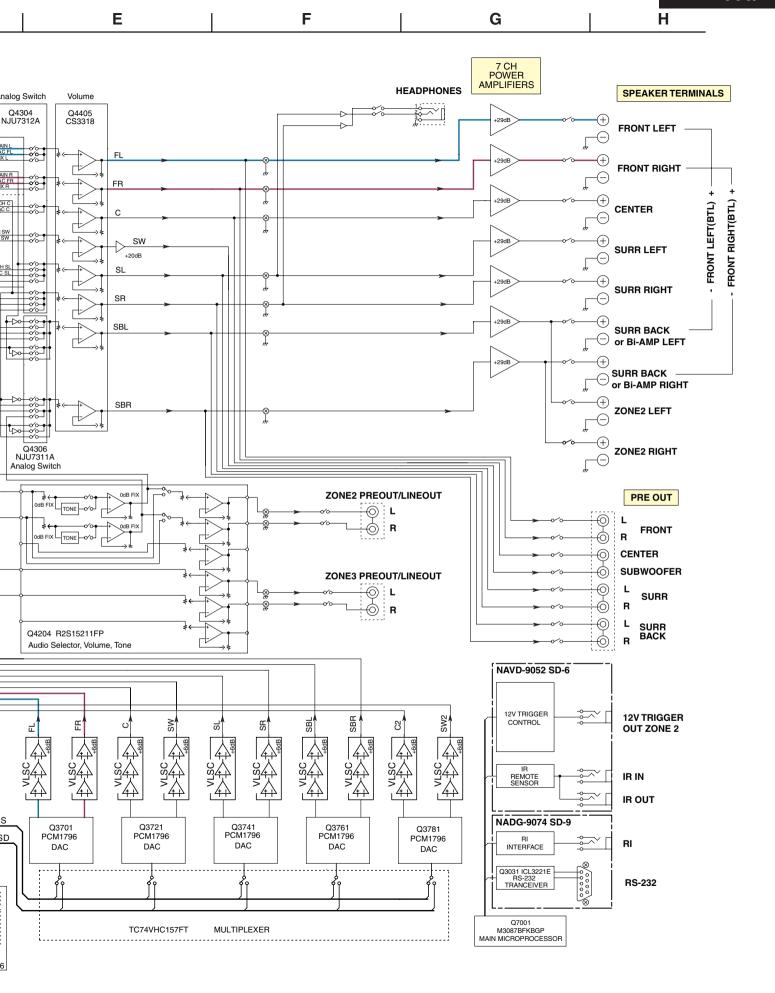

| A | B | C | D

## BLOCK DIAGRAMS-2 VIDEO SECTION

1

VIDEO BOARD (NAVD-9052, SD-6) Video Switch COMPONENT VIDEO Q2201 NJW1321 C-DET W MMP IN 1 CB1 CR1 **Y2** IN 2 CB2 CR2 2 **Y3** IN<sub>3</sub> CB3 CR3 Video Amp Analog Switch Q2012,Q2013 74HC4051 NJM2587 COMPOSITE VIDEO DVD VCR/DVR CBL/SAT LPF(6MHz) 6dB DRV 3 GAME/TV AUX 1 AUX 2 (FRONT) S VIDEO INPUT S-DET DVD MMP VCR/DVR CBL/SAT 4 Z2 S-DET GAME/TV LPF(12MHz) AUX 1

BPF(140K-6MHz) GdB DRV

Q2014 MM1512 Y/C Mix


NOTE MMP is short for MAIN MICROPROCESSOR.


<Note:


5


Refer to SCHEMATIC DIAGRAM-6, -17 and -29 (SD-6, SD-17 and SD-29) for video and HDMI signal waveforms.


AUX 2 (FRONT)

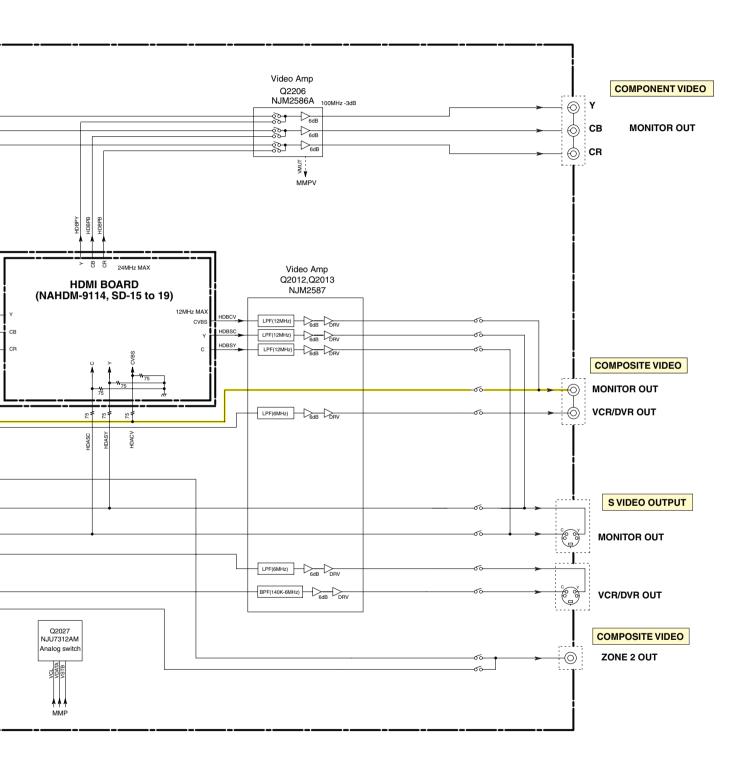


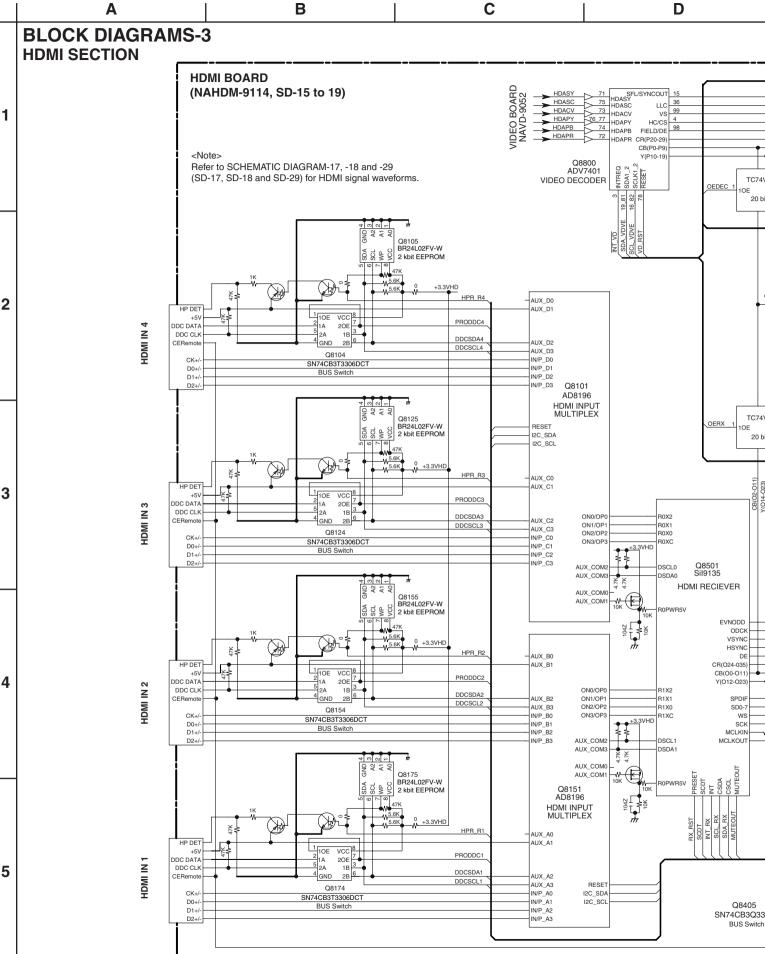


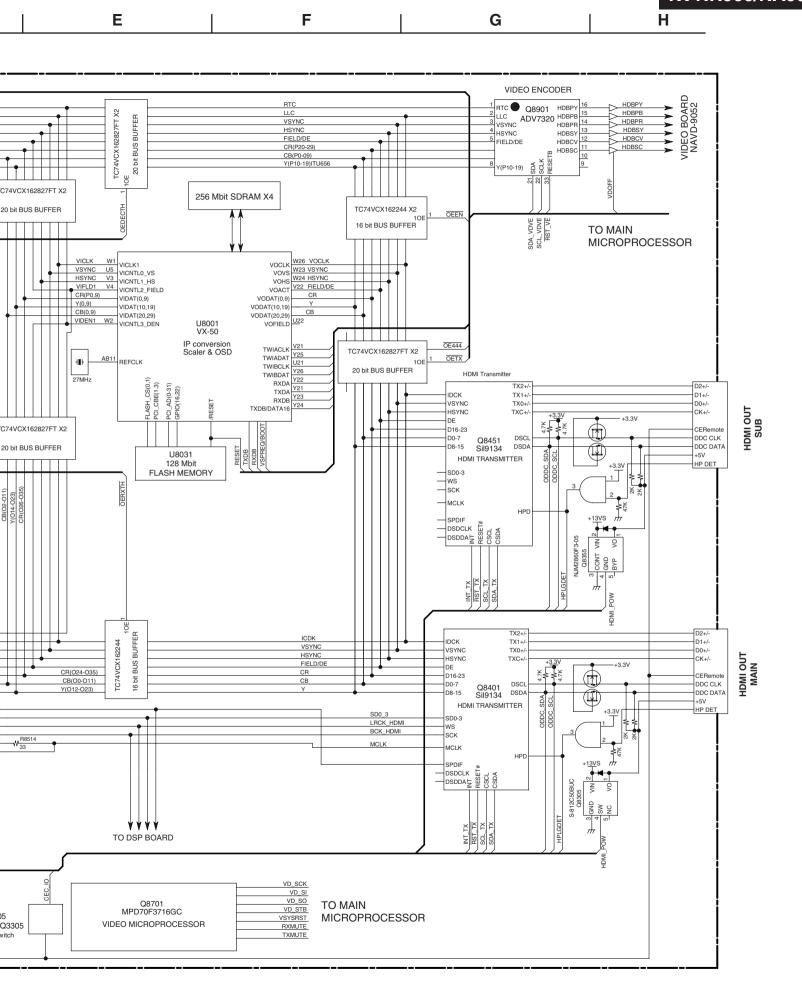


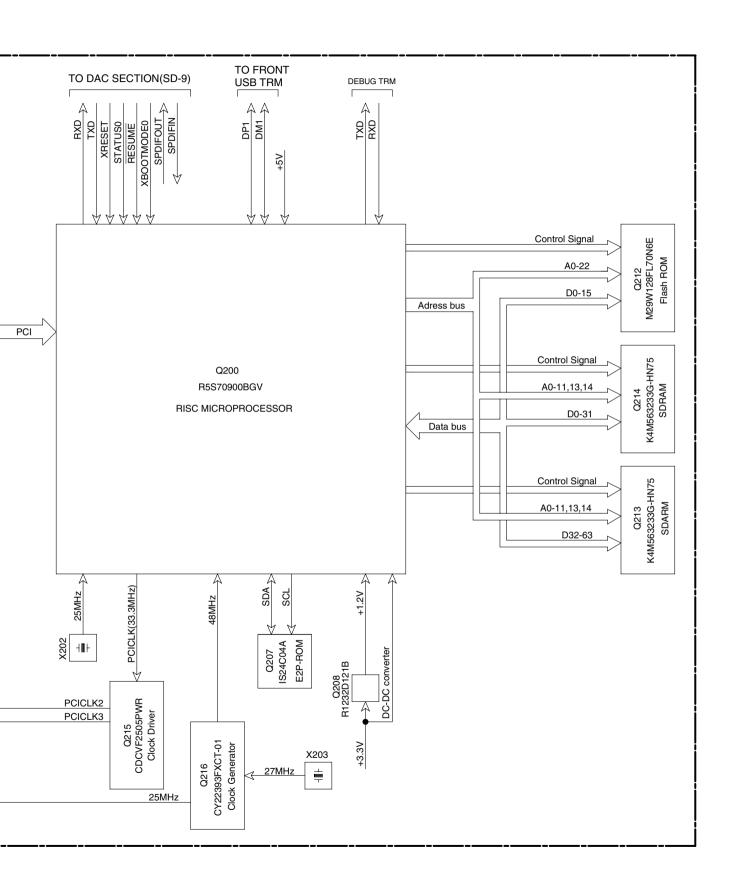

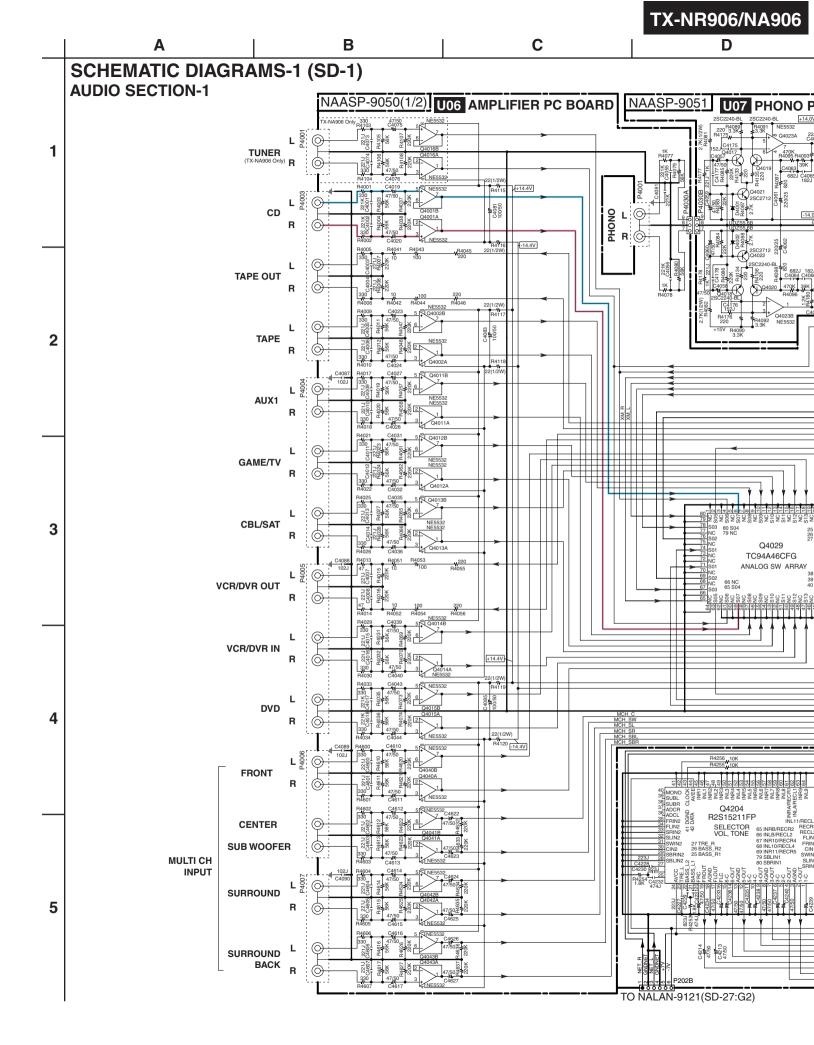

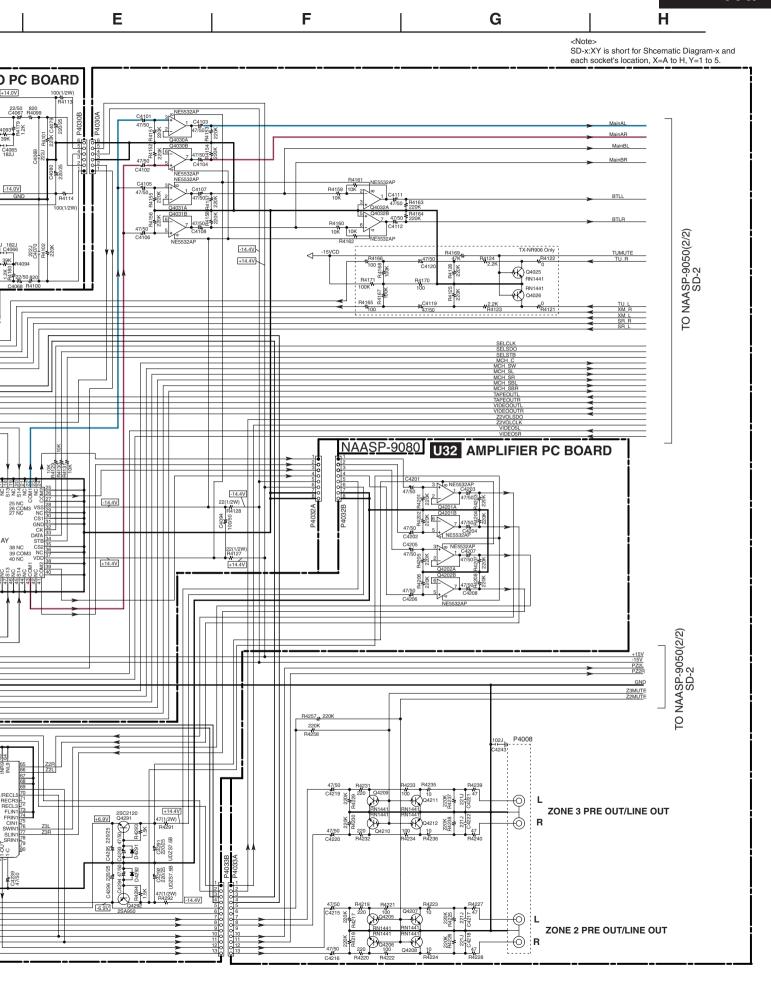


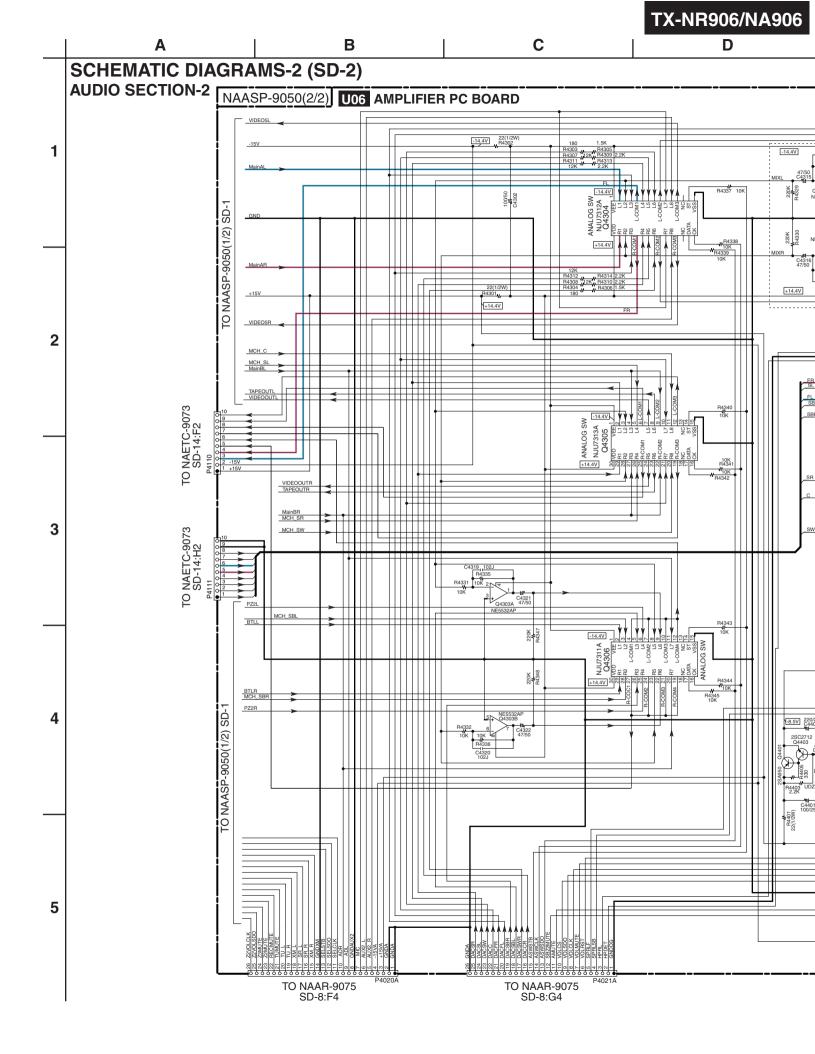

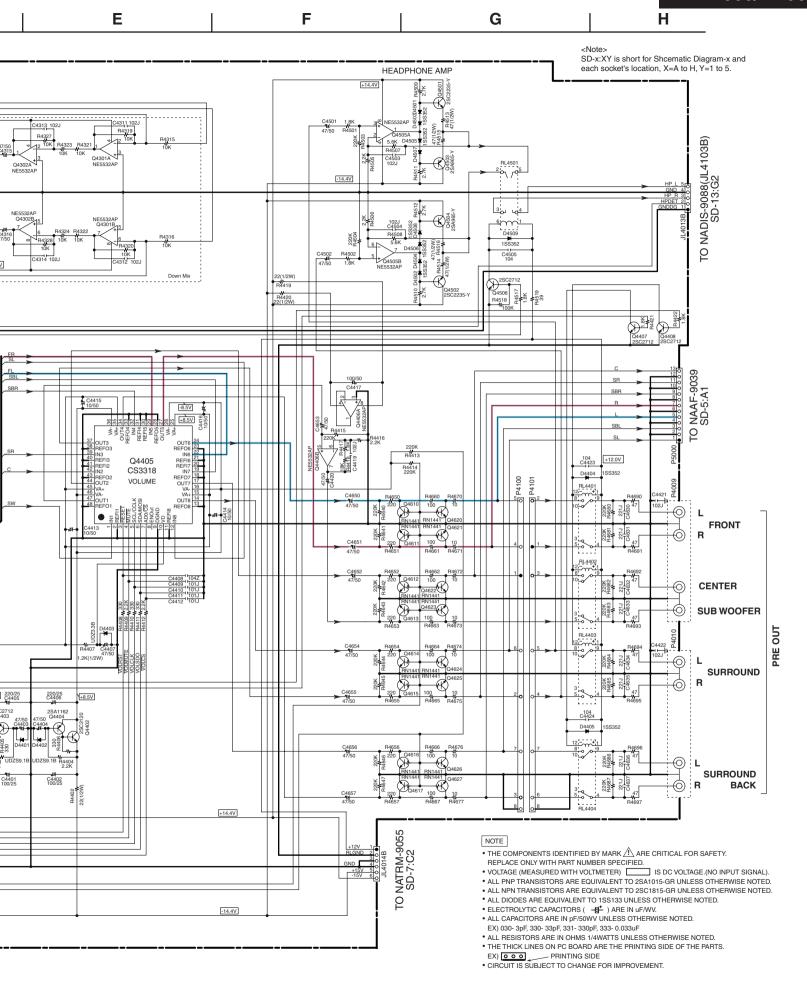


| A | B | C | D

# SCHEMATIC DIAGRAMS-3 (SD-3) POWER AMPLIFIER SECTION-1

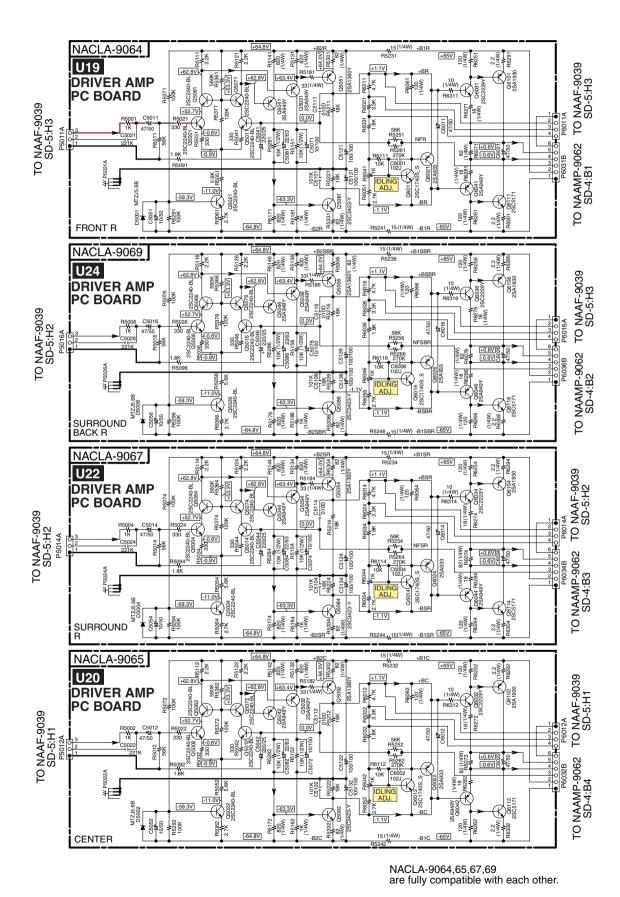

Ε F G

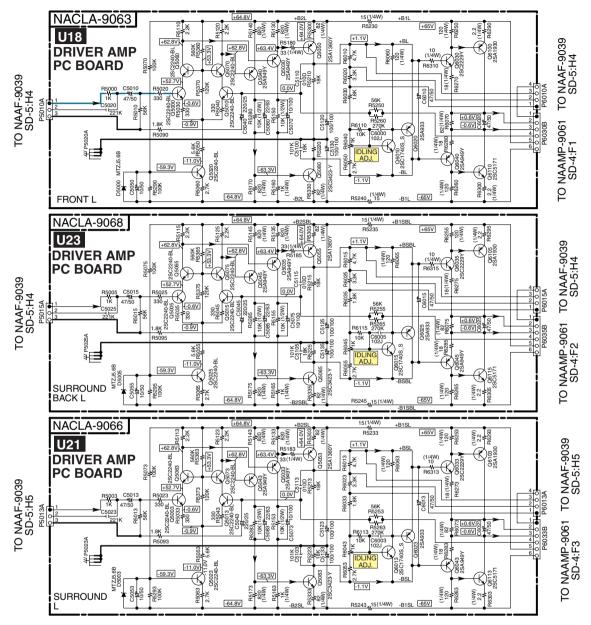

NACLA-9063,66,68 are fully compatible with each other.

<Note> SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

#### NOTE

- THE COMPONENTS IDENTIFIED BY MARK extstyle extstyle
- REPLACE ONLY WITH PART NUMBER SPECIFIED.

   VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE.(NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
   ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS ( →
   ) ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
   EX) 030-3pF, 330-33pF, 331-330pF, 333-0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.

  EX) OOO PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

TX-NR906/NA906 D TO NAAF-9039 SD-5:F3 P6350A D6001 1SS133 TO NATRM-9055 SD-7:D5 TO NATRM-9055 SD-7:D5 TO NATRM-9055 SD-7:D5

> TO NAAF-9039 SD-5:E3

C

SCHEMATIC DIAGRAMS-4 (SD-4)
POWER AMPLIFIER SECTION-2

NAAMP-9062

U17 POWER AMP PC BOARD

FRONT R

-0.6V

+0.6V

-0.6V

-0.6V

SURROUND BACK

SURROUND R

CENTER

TO NACLA-9069 SD-3:D3

TO NACLA-9067 SD-3:D4

> TO NACLA-9065 SD-3:D5

1


2

3

4

Ε F G

TO NAAF-9039 SD-5:F3

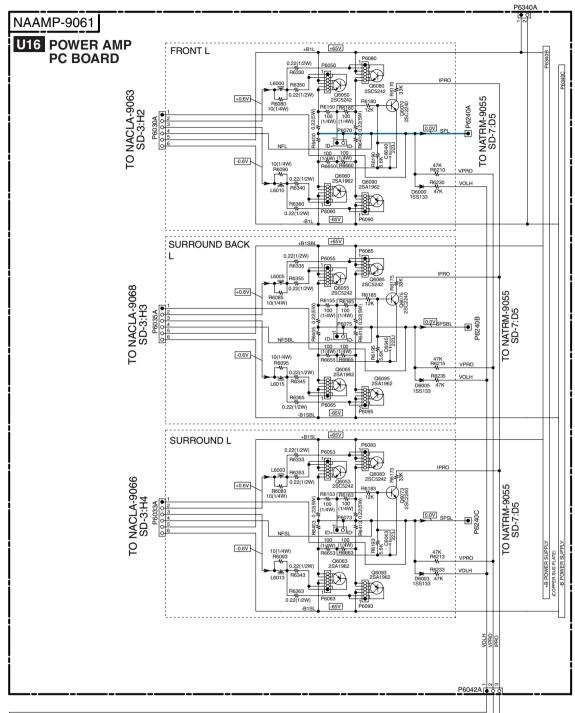

- THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY.
- REPLACE ONLY WITH PART NUMBER SPECIFIED.

   VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE.(NO INPUT SIGNAL).

   ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
   ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.

- $\bullet$  THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.


SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.


A B C D


### SCHEMATIC DIAGRAMS-5 (SD-5) POWER SUPPLY SECTION-1


NAAF-9039 U01 AMPLIFIER PC BOARD 1 TO NAASP-9050(2/2) SD-2:H3 SBR R SBL M61CIZ Q6380 NAETC-9043 NAETC-9042 U05 U04 2 THERMAL SENSOR THERMAL SENSOR PC BOARD PC BOARD JL6402A IPRO VPRO C6701 100/25 -Pe560 FAN 3 FAN RL6601 1 0999 2 0 -0 C6222 220/25 RL6602 ÷ F6601 4 20A-UL-250V TO NAAR-9075 SD-8:H2 8 +3.3VDG 4 R6603 2.2 (1/2W) RL6611 TO NATRM-9055 SD-7:D2 F6602 4 0 1 1 20A-UL-250V L RL6612 1 FANCTRL R6611 W FAN GND +12V R6613 2.2 (1/2W) 0 2 NAPS-9040 **U02 POWER SUPPLY** PC BOARD TO POWER TRANS SD-14:D3 F6603 20A-UL-250V N S S T F 1 S1H+
2 S1H3 S1M+
4 S1M5 S1L+
6 S1L7 GND AMP 5


<Note>
SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

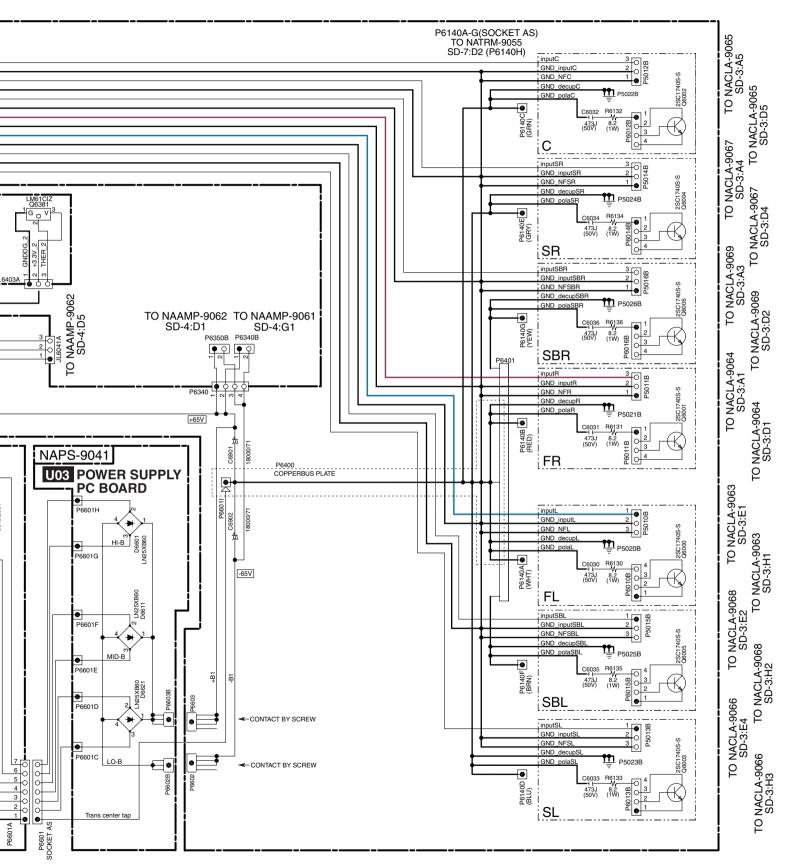

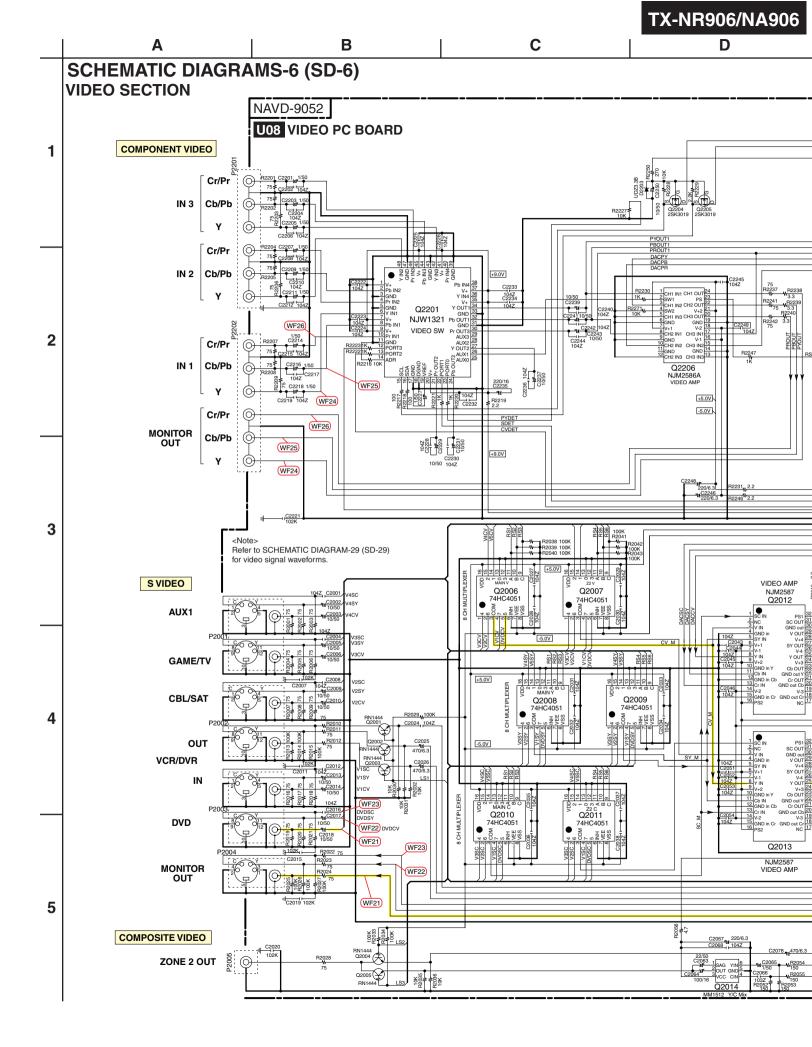

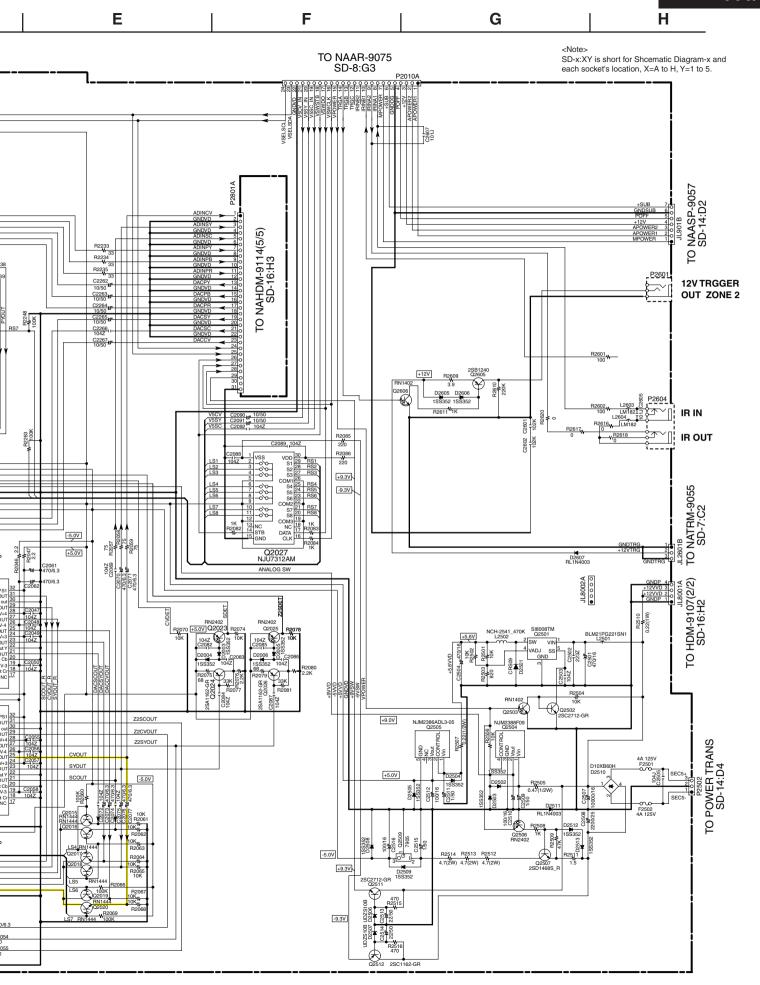

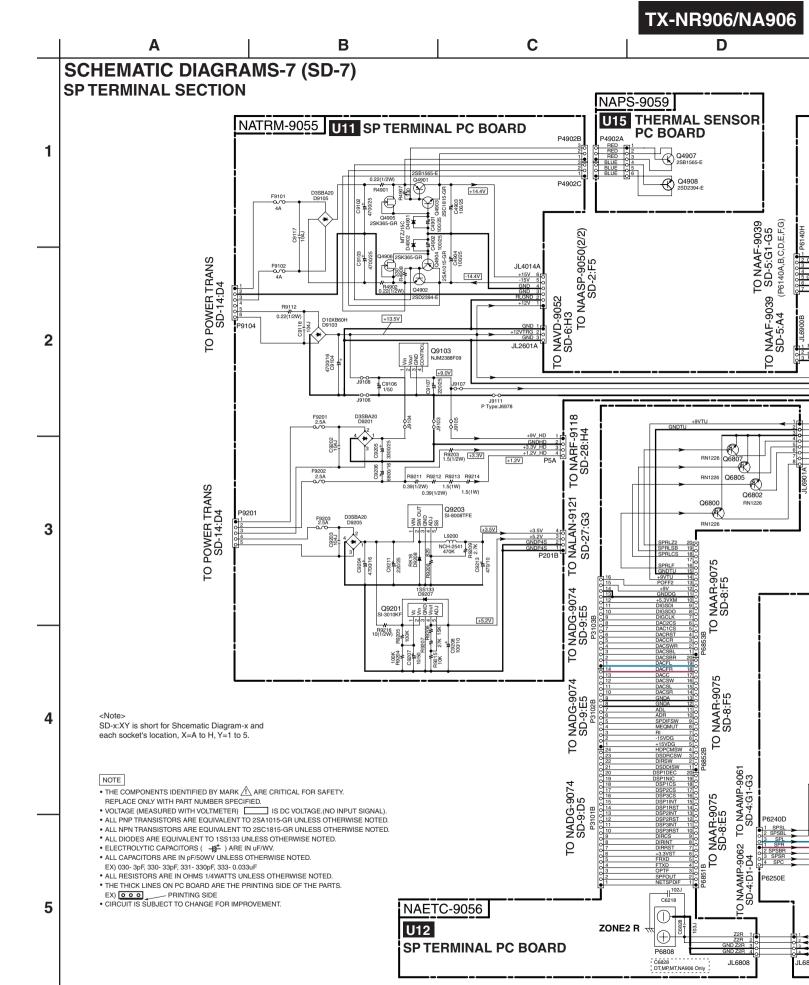

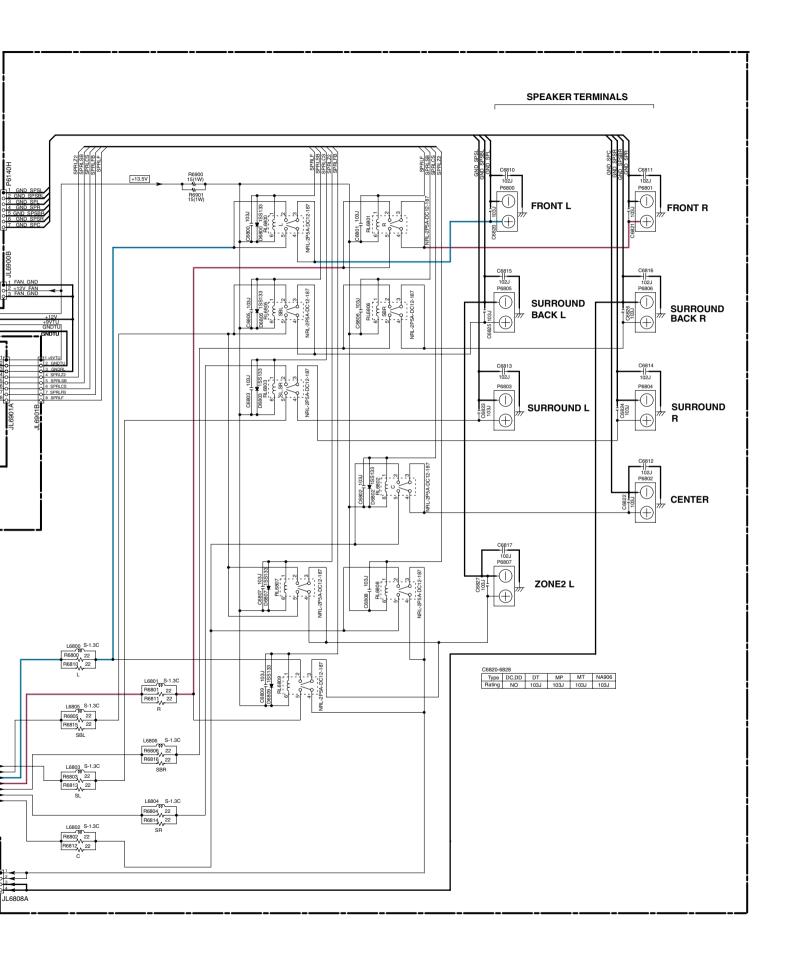

TX-NR906/NA906 R7213 DC,DD Type only Q7003 DTA114YKA +3.3V +5.0V +3.3V +3.3V +5.0V D7382 1SS352 Q7381


**SCHEMATIC DIAGRAMS-8 (SD-8)** MICROPROCESSOR SECTION NAAR-9075 U28 MICROPROCESSOR PC BOARD TO FLASH WRITER 1 2 Q7001 M3087BFKBGP MAIN MICROPROCESSOR 3 4 DC,DD Type Only FOR HD-RADIO MODEL +3.3VMPU +5.0V SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5. • THE COMPONENTS IDENTIFIED BY MARK / ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED. IS DC VOLTAGE.(NO INPUT SIGNAL). VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE.(NO INPUT SIGNAL).
 ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED. 5 • ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED. • ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED. • ELECTROLYTIC CAPACITORS ( -- 🖟 ) ARE IN uF/WV.
• ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED. EX) 030-3pF, 330-33pF, 331-330pF, 333-0.033uF ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.  $\bullet$  THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS. PRINTING SIDE
 CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.


VCC 14 13 11 9 GND 9 SELCLK Q7151 TC74VHCT08AFT TC74VHCT08AF1 C7155 104Z 1 VCC 14 2 VCC 14 13 3 12 4 11 10 ### 190 O L TO NADIS-9085 SD-13:B2 TO NAHDM-9114(5/5) SD-19:H4 C7161 104Z +5.0V TO NARF-9077 TO NALAN-9121 D-TYPE ONLY SD-12:H2 SD-27:G4 TO NAAF-9039 SD-5:A4 SRRST 5V. R7413, R7414 TX-NR906 Only C7171104Z TO NARF-9118 SD-28:H3(DC Type) OR TO TUNER UNIT R7167 47 LEDLATCH (DT,MP,MT Type) 1 2 3 4 6 G2A B GND 27.17.0 2 3-8 LINE DECODER P2010B TO NAVD-9052 SD-6:F1 Q7181 C7183 100/16 Q7182 D7181 UDZS9.1 R7198 TO NAASP-9050(2/2) TO NAASP-9050(2/2) SD-2:C5 SD-2:B5 +5VMPU C6202P502FR Q7261 +9V TO NAETC-9056 TO NAETC-9056 TO NAETC-9056 SD-7:D5 SD-7:D4 SD-7:D3


F


G

Ε

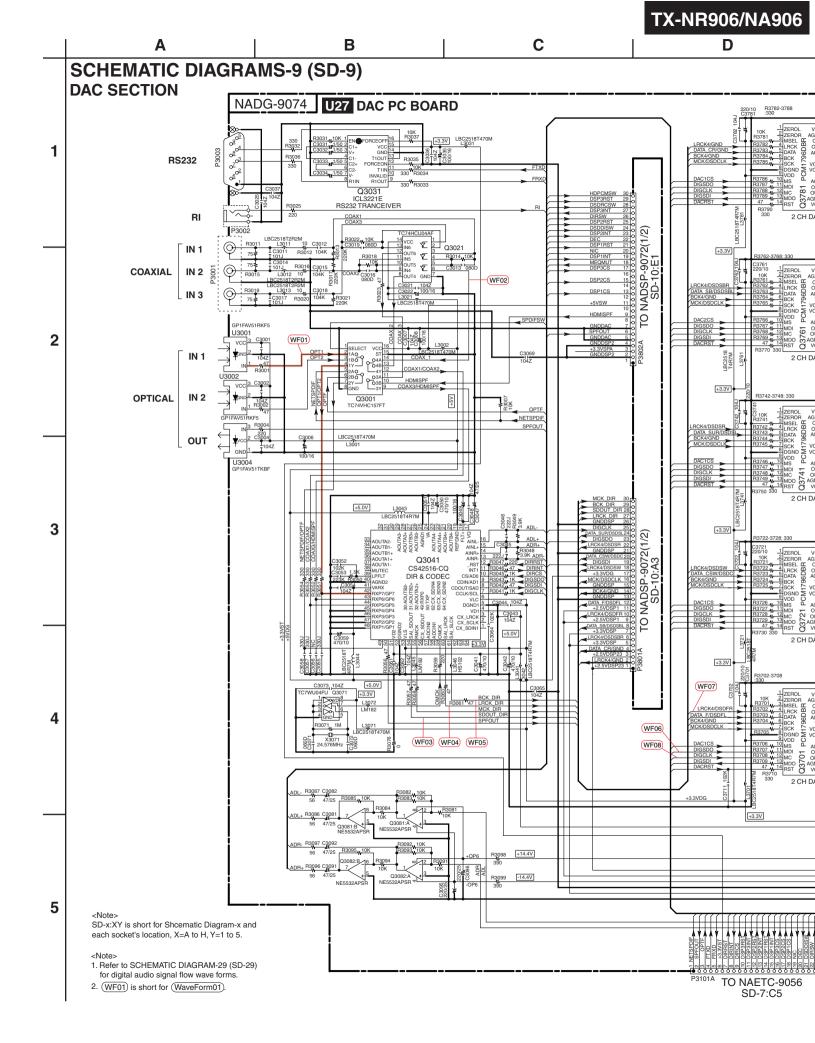


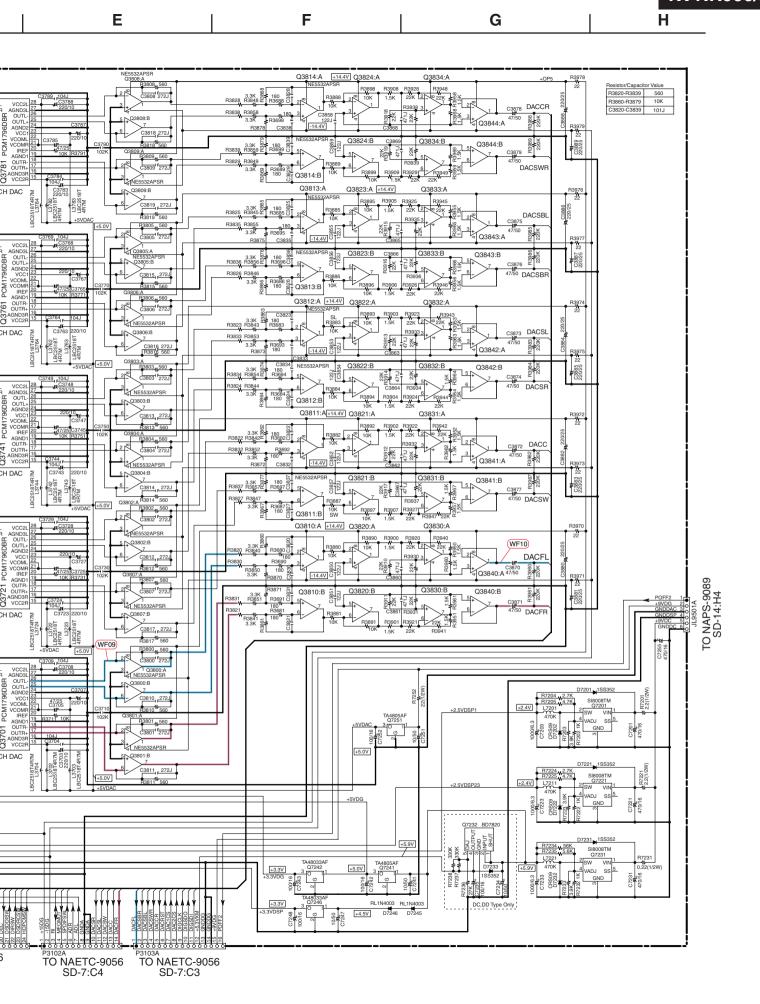

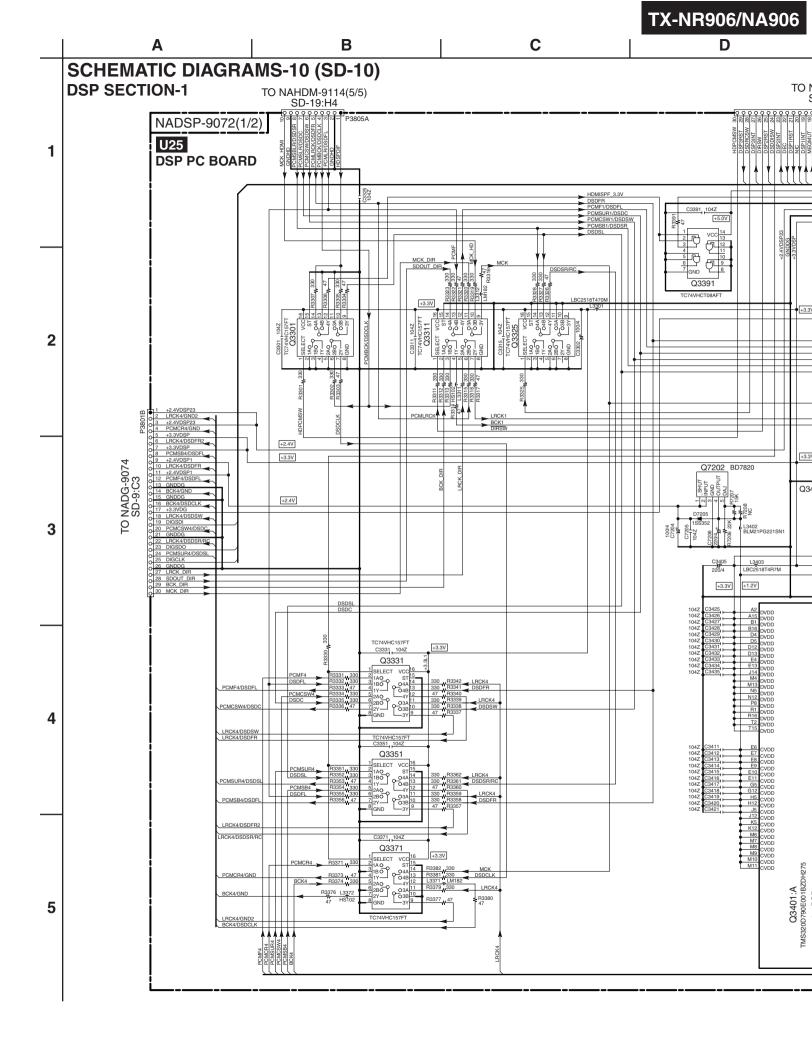


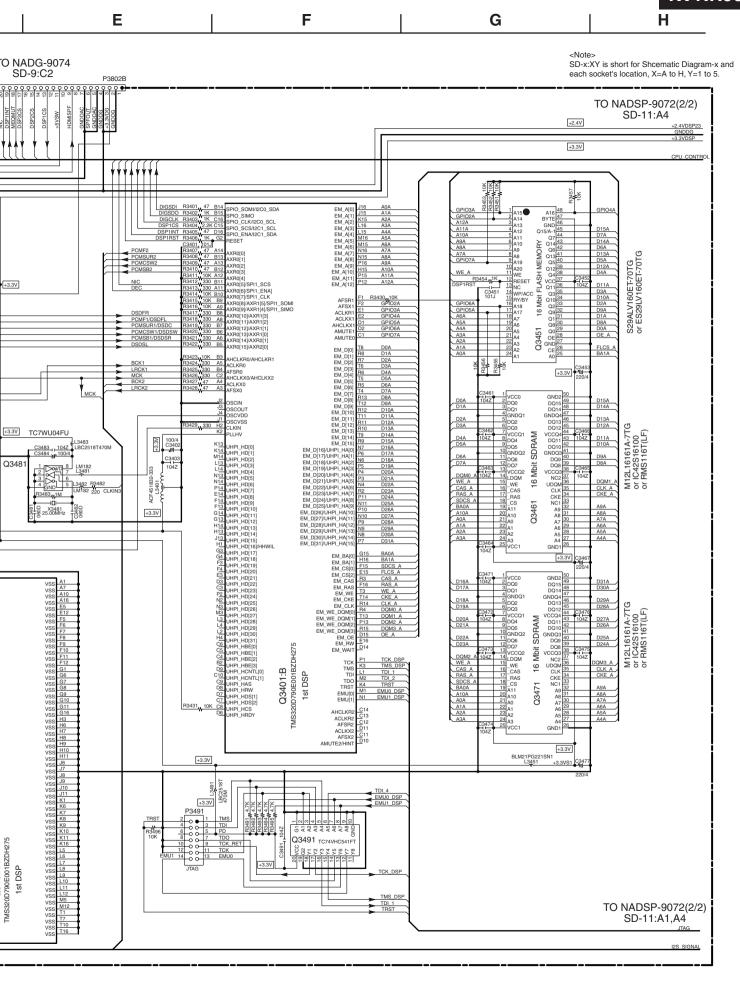



C **SCHEMATIC DIAGRAMS-11 (SD-11) DSP SECTION-2** NADSP-9072(2/2) 1 U25 DSP PC BOARD TO NADSP-9072(1/2) SD-10:H1 A0B A3B A8B A9B A11B A16, 48
BYTE# 47
GND, 46
CND, 46
CND, 46
CND, 44
CND, 43
CND, 43
CND, 43
CND, 43
CND, 40
CND, EM. C.C.K. V.S. D.DOD +3.3V 4 Mbit FLASH ROM 2 3:SPIO\_CLK/I2C0\_SCL | 7:SPIO\_SCS/I2C1\_SCL | 3:VSS | 5:SPIO\_ENA/I2C1\_SDA | 1 R3510 47 C3552 101J DENDU | 67 | 104Z | 104 EM WE DQM[1 D10B | 119 | AXR0[4] | AXR0[5] SP1 | SCS | 120 | AXR0[5] SP1 | SCS | 121 | AXR0[5] SP1 | ENA | 122 | AXR0[6] SP1 | ENA | 122 | AXR0[6] SP1 | ENA | 122 | AXR0[6] AXR1[5] SP1 | SOM | 124 | AXR0[6] AXR1[5] SP1 | SOM | 126 | AXR0[6] AXR1[5] SP1 | SIMO | 126 | AXR0[6] AXR1[6] SP1 | SIMO | 126 | AXR0[6] AXR1[6] SP1 | SIMO | 126 | AXR0[6] AXR1[7] AXR0[7] AXR0[ Q3551 Q3501 TMS320D788E001BRFP266 +3.3V 22 2nd DSP GND2 50 DQ15 48 DQ14 47 GNDQ4 46 DQ13 45 DQ12 44 VCC0 DQ0 DQ1 GNDQ1 EM\_D(3) 48
VSS 47
VSS 46
EM\_D(4) 46
EM\_D(5) 44
CYDD 44
CYDD 43
104Z
EM\_D(6) 42
CYDD 42
EM\_D(7) 41
104Z
EM\_D(7) 41
104Z
EM\_D(8) 49
EM\_WE\_DOM(0) 39
EM\_WE\_DOM(0) 39
EM\_WE\_DOM(0) 39 PCMSB2 16 Mbit SDRAM D6B BCK2 3 LDQM\_E WE\_B CAS\_B EM\_WE 37 LRCK3 • +3.3V +1.2V C3508 C3507 220/4 C3509 104Z C3510 +3.3V ·----TO NADSP-9072(1/2) SD-10:H1,H5 +1.2VDSP23 +2.4VDSP23 +3.3VDSP TCK DSP 4 701.2 L3571 LBC2518T470M Q3571 Q3571

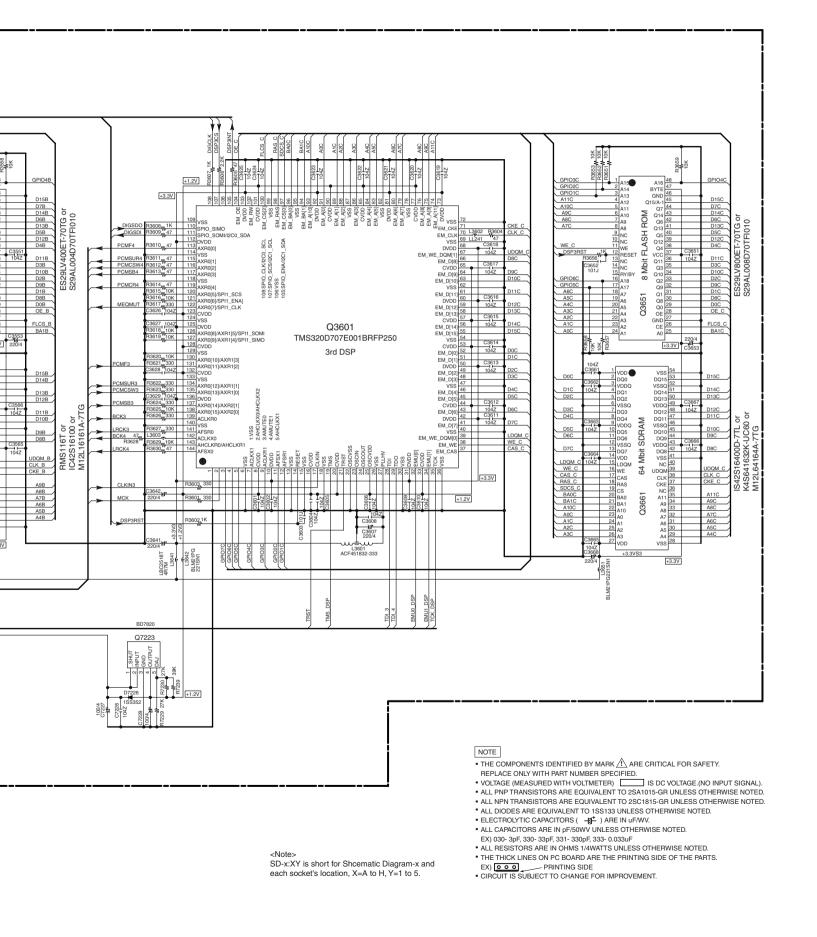

C D SCHEMATIC DIAGRAMS-12 (SD-12) **XM/SIRIUS SECTION** 1 NARF-9077 U30 XM PC BOARD CS4344 Q101 R102 W330 R103 W330 R104 W330 R105 W100 I2S SDO SDIN I2S\_SCLK 2 DEM/SCLK LRCK VΑ I2S\_LRCLK GND I2S\_OCLK 4 MCLK AOUTL 5 VQ FILT+ 2 TC74VH0 Q10 3 SZ HSDP\_EN LSDP DT4\_MODE 35 2 VSS 3 SC\_TX\_OUT 4 VDD 5 SC\_RX\_IN 6 I2C\_SCL 7 I2C\_SDA 8 VDD 9 ANT\_REV 10 VSS 11 12 E VSS HSDP\_CLK 34 14 VCC VDD 33 Q103 +3.3V 104Z R141\_100K 32 F2628E-01 or BU9450KV-E2 HSDP\_DA VSS 30 TEST SC\_RATE R142 101 XM\_ERR\_IRQ OSC IN C113 27 I2S\_RATE LINKACTIVE COMM\_TX\_EN VDD VSS VDD COMM\_RX\_P VDD VSS COMM\_TX\_M COMM\_TX\_P XM\_RESET OSC\_OUT VSS 25 12 C115 102K Q104 +3.3V C117 100/16 C118 水 170/6:3 4 C126 104Z C127 104Z XM SDI I XM\_SDO\_L

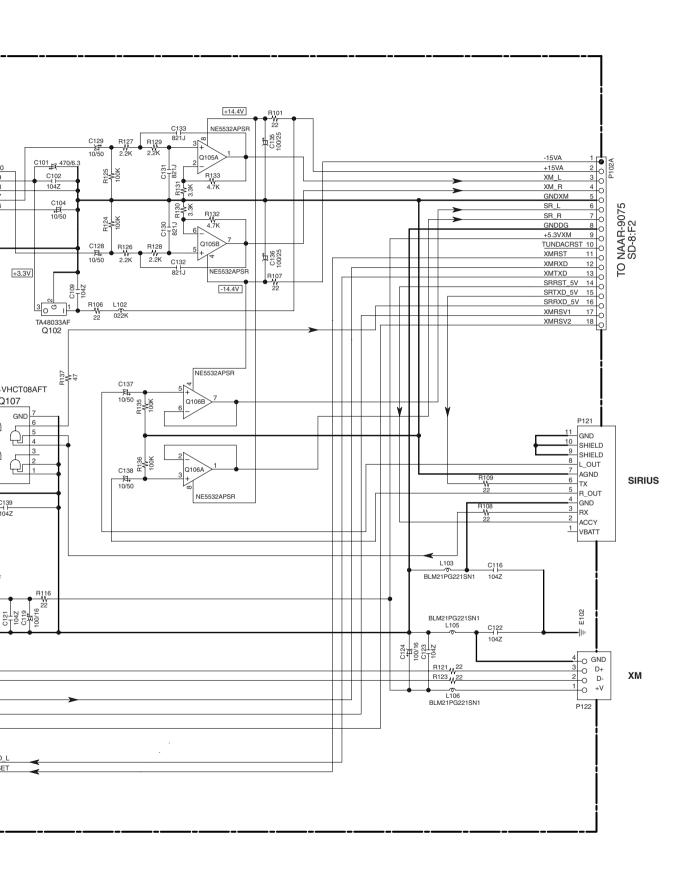


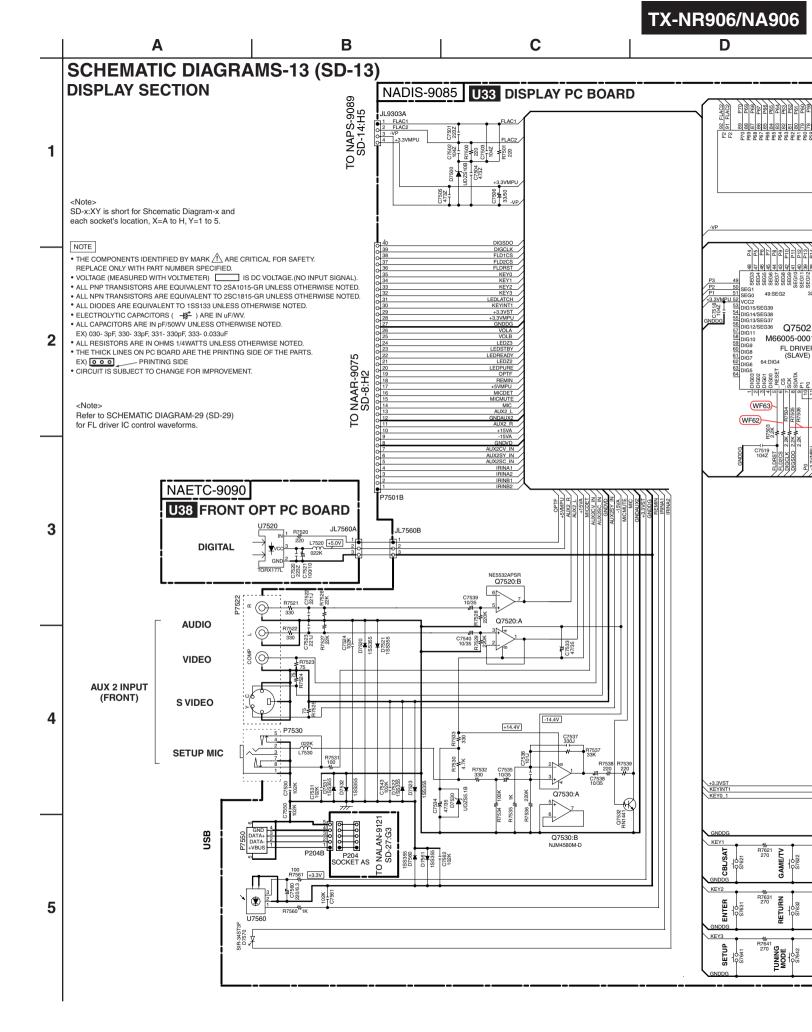

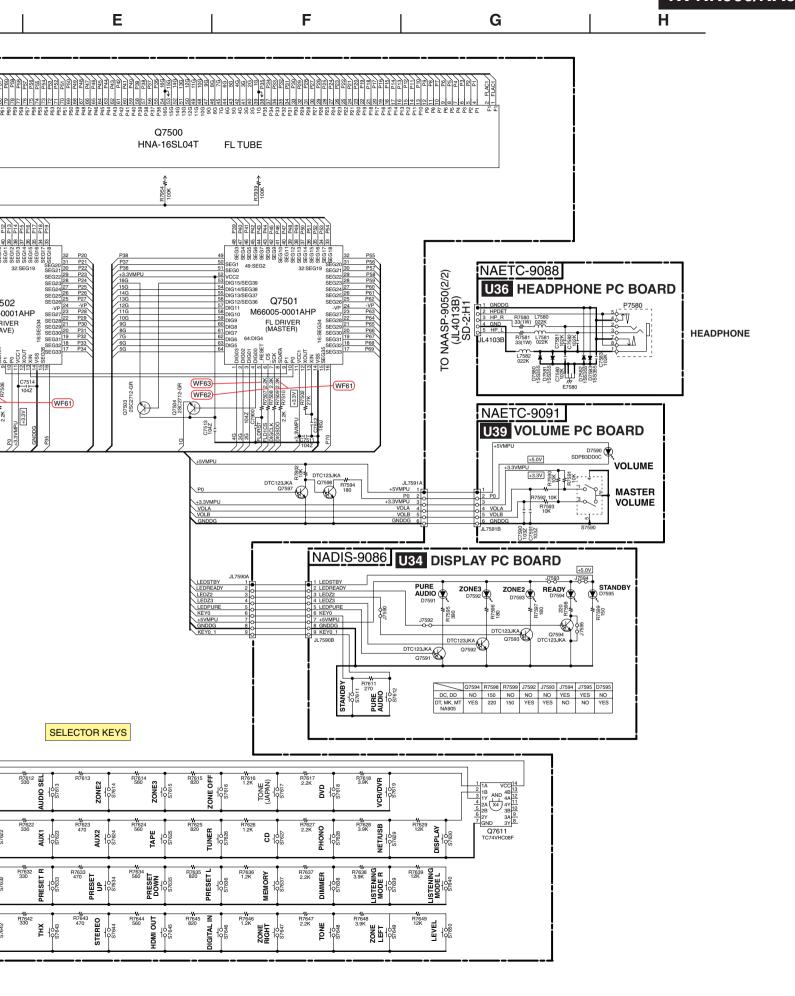

| A | B | C | D

## SCHEMATIC DIAGRAMS-14 (SD-14) POWER SUPPLY SECTION-2

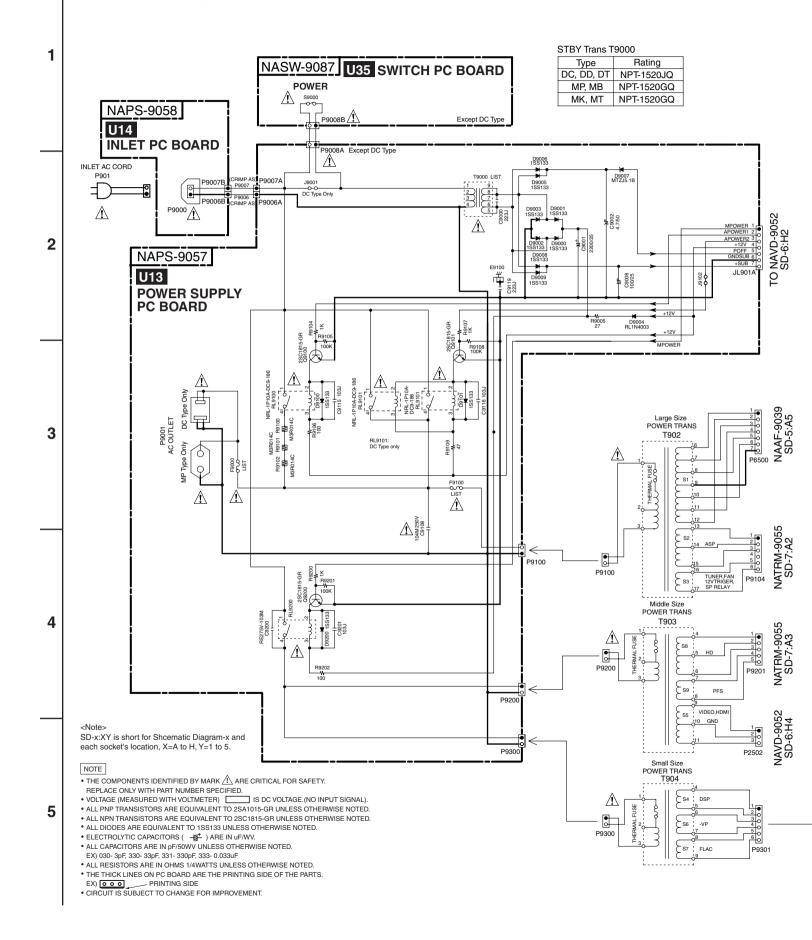

Ε F G

### **CAUTION**



FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.

### **ATTENTION**



CAUTIONE AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE, REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMME INDIQUE.



THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE FUSE HAZARD.REPLACE WITH SAME TYPE FUSE, FOR FUSE RATING REFER TO THE MAKING ADJACENT TO THE SYMBOL.



CE SYMBOLE INDIQUE QUE LE FUSIBLE UTLISE EST A LENT, E POUR UNE PROTECTION PERMANENTE, N'UTILISER QUE DES FUSIBLES DE MEME TYPE. CE DARNIER EST INDIQUE LA QU LE PRESENT SYMBOL EST APPOSE.

### AC Volt / Freq.

| Type       | Volt / Freq.     |  |  |
|------------|------------------|--|--|
| DC, DD, DT | 120V 60HZ        |  |  |
| MP, MB     | 220-240V 50HZ    |  |  |
| MK, MT     | 220-240V 50/60HZ |  |  |

### Fuse Rating

| Type     | F9100     | F9000     |  |
|----------|-----------|-----------|--|
| DC, DD   | 12A 125V  | 5A 125V   |  |
| DT       | 12A 125V  | NO        |  |
| MP       | 6.3A 250V | 2.5A 250V |  |
| MT.NA906 | 6.3A 250V | NO        |  |


|            | FOWEI Halls 1902 |           |  |  |  |
|------------|------------------|-----------|--|--|--|
|            | Type             | Rating    |  |  |  |
| DC, DD, DT |                  | NPT-1554D |  |  |  |
|            |                  | NPT-1554M |  |  |  |
|            | MT, NA906        | NPT-1554M |  |  |  |

### Power Trans T903


| Type       | Rating    |  |  |
|------------|-----------|--|--|
| DC, DD, DT | NPT-1555D |  |  |
| MP         | NPT-1555M |  |  |
| MT, NA906  | NPT-1555M |  |  |


### Power Trans T904

| Туре       | Rating    |  |  |
|------------|-----------|--|--|
| DC, DD, DT | NPT-1556D |  |  |
| MP         | NPT-1556M |  |  |
| MT, NA906  | NPT-1556M |  |  |

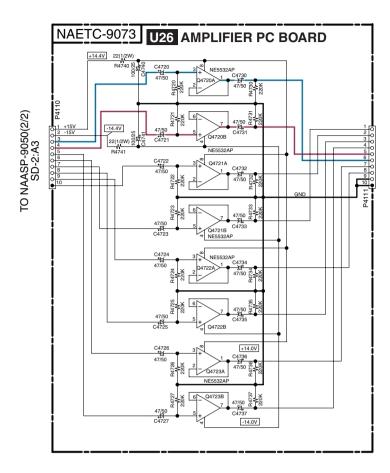

TO NAASP-9050(2/2) SD-2:A3

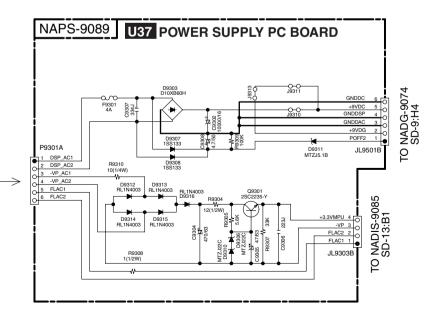

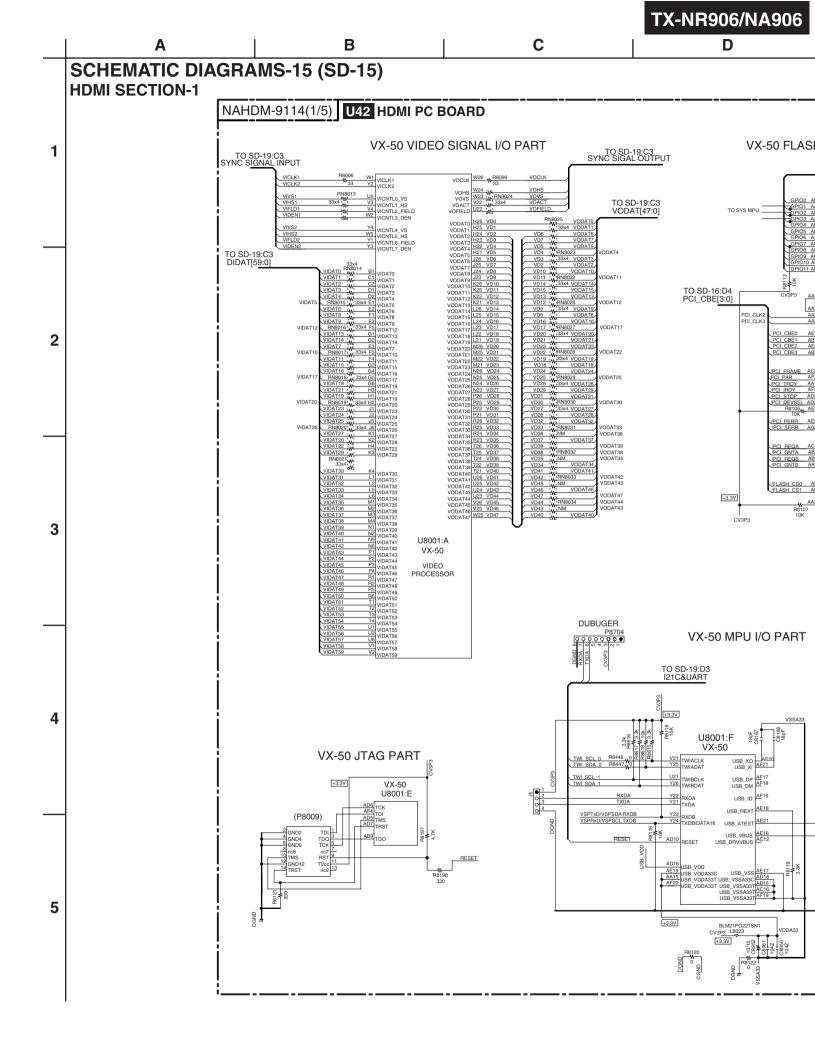

ASH MEMORY I/O PART VX-50 POWER SUPPLY & GROUND PART TO SD-16:F4 GPIO[24:0] 222017(2) 222017 +1.2V U8001:B A23 VSS2 A26 VSS3 E5 VSS4 E7 VSS5 E9 VSS6 E11 VSS7 E13 VSS8 E15 VSS9 E17 VSS10 VX-50 VDD23 VDD24 VDD25 VDD26 E19 VSS9 E17 VSS10 E19 VSS11 F8 VSS12 F16 VSS13 F20 VSS14 F22 VSS15 F24 VSS16 F26 VSS17 322 VSS18 H6 VSS99 VDD27 VDD28 VDD29 VDD30 TO SD-16:D4 PCI\_AD[31:0] VDD31 VDD32 VDD33 VDD34 J3 VSS20 J21 VSS21 K5 VSS22 K10 VSS23 K11 VSS24 AA26 POCLK1 AA24 POCLK2 POCLK3 1 VSS24 2 VSS25 3 VSS26 4 VSS27 K15 K16 VSS28 K16 VSS29 K17 VSS30 K24 VSS31 L4 VSS32 L10 VSS33 L11 VSS34 L12 VSS35 U8001:C VX-50 VDDIO20 VDDIO21 VDDIO22 VDDIO23 VDDIO25 VDDIO26 VDDIO26 VDDIO28 VDDIO28 VDDIO29 VDDIO30 VDDIO31 VDDIO3
VDDIO5
VDDIO6
VDDIO7
VDDIO8
VDDIO10
VDDIO11
VDDIO12
VDDIO13
VDDIO14
VDDIO15
VDDIO17
VDDIO18 U8001:D VX-50 L11 VSS34 L12 VSS35 L13 VSS36 L14 VSS37 L15 VSS38 L16 VSS39 L17 VSS40 VSS100 VSS101 VSS102 VSS103 AE22 PERR AD20 SERR L17 M6 VSS40 W10 W11 VSS42 W11 VSS43 W12 VSS44 VSS44 VDDIO31 VDDIO33 VDDIO34 VDDIO35 VSS103 VSS104 VSS105 A/ VSS106 A/ VSS107 A M12 M13 VSS45 M14 VSS46 M15 VSS47 M16 VSS48 M17 VSS49 M23 VSS50 N3 VSS51 VSS52 VSS108 AB5
VSS109 AB1
VSS109 AB1
VSS111 AB1
VSS111 AB1
VSS111 AC2
VSS113 AC9
VSS114 AC1
VSS115 AC1
VSS115 AD1
VSS116 AC1
VSS116 AC1
VSS118 AD1
VSS119 AD1
VSS119 AD1
VSS120 AC2
VSS121 AC2
VSS121 AC2
VSS121 AC2
VSS123 AC7
VSS123 AC7
VSS125 AF5
VSS126 AF5
VSS126 AF5
VSS126 AF2 TEST2 AA22 ARB\_EXT DDR\_VDDIO1
DDR\_VDDIO2
DDR\_VDDIO3
DDR\_VDDIO4
DDR\_VDDIO6
DDR\_VDDIO6
DDR\_VDDIO6
DDR\_VDDIO8
DDR\_VDDIO9
DDR\_VDDIO9 DDR\_VDDIO12
DDR\_VDDIO13
DDR\_VDDIO14
DDR\_VDDIO15
DDR\_VDDIO16
DDR\_VDDIO17
DDR\_VDDIO18
DDR\_VDDIO19
DDR\_VDDIO20
DDR\_VDDIO21 VSS53 VSS54 VSS58 VSS59 VSS60 VSS61 VSS62 VSS63 92 +2.5V VX-50 OSC&PLL PART U8001:G (1608LM182 F12 <Note> AVDD\_AUX AVSS\_AUX SD-x:XY is short for Shcematic Diagram-x and AE9 AF8 AVDD\_AIX AVSS\_VID -₽8 each socket's location, X=A to H, Y=1 to 5. NOTE • THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY. 100/6.3 C8165 T04Z 104Z C8166 REPLACE ONLY WITH PART NUMBER SPECIFIED.

• VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE.(NO INPUT SIGNAL). ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED. ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
 ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED. 00hm ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED. EX) 030- 3pF, 330- 33pF, 331- 330pF, 333- 0.033uF • ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED. • THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS. EX) OOO PRINTING SIDE CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

F

G

TX-NR906/NA906 C **SCHEMATIC DIAGRAMS-16 (SD-16) HDMI SECTION-2** NAHDM-9114(2/5) U42 HDMI PC BOARD 1 U8027 HY5DU561622ETP-4-C 2 MAD13 3 U8001 VX-50 TO SD-15:E2 PCI\_AD[0:23] 4 DQ60 RN8061 MDQ60 DQ61 33X4 MDQ61 CBE[3:0] SD-15:D2 PCI\_ SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5. 2 NOTE • THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.

• VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE.(NO INPUT SIGNAL). ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED. • ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
• ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED. 5 ELECTROLYTIC CAPACITORS ( → → ) ARE IN □F/WV.

ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.

EX) 030- 3pF, 330- 33pF, 331- 330pF, 333- 0.033uF

ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.

EX)

PRINTING SIDE

CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

Ε F G 99999 U8030 HY5DU561622ETP-4-C 256 Mbit SDRAM U8029 HY5DU561622ETP-4-C 256 Mbit SDRAM U8028 HY5DU561622ETP-4-C 256 Mbit SDRAM TO SD-15:E1 GPIO[24:0] MS Mbit Flash Memo R8151 +3.3V U8067

Refer to SCHEMATIC DIAGRAM-29 (SD-29)

for HDMI signal waveforms.


<Note> SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5. NOTE • THE COMPONENTS IDENTIFIED BY MARK / ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED. ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
ELECTROLYTIC CAPACITORS ( - # ) ARE IN uF/WV. ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED. EX) 030-3pF, 330-33pF, 331-330pF, 333-0.033uF

• ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.  $\bullet$  THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS. EX) O O PRINTING SIDE

• CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT. HDMSCL HDMSDA XC6213B182M +3.3VHD1 L8455 C8467 WF41 AVCC19
AVCC19
AGND
PVCC2
AGND
TX2+
TX2-Q8451 Sil9134 RST\_RXSV HDMSC HDMSD TX PIXCLE HDMI OUT SUB WF41 HDMI TX OUT2 (WF42) TO SD-18:B2 TMDS/DDC DATA R449 102J TO SD-18:H3 VIDEO MPU TO SD-19:E4 DIGITAL\_VIDEO\_DATA TX[Y,CB,CR0:11] TO SD-19:H5 DIGITAL\_AUDIO\_DATA


F

G

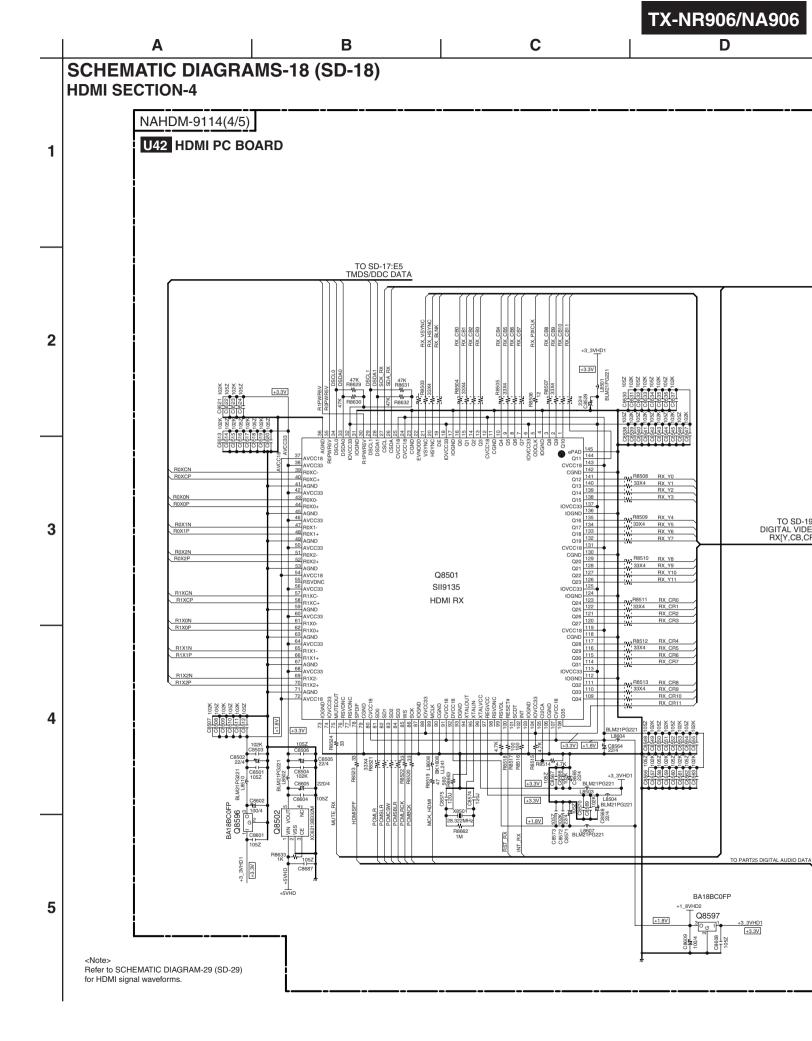

E | F | G | H

<Note>
SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

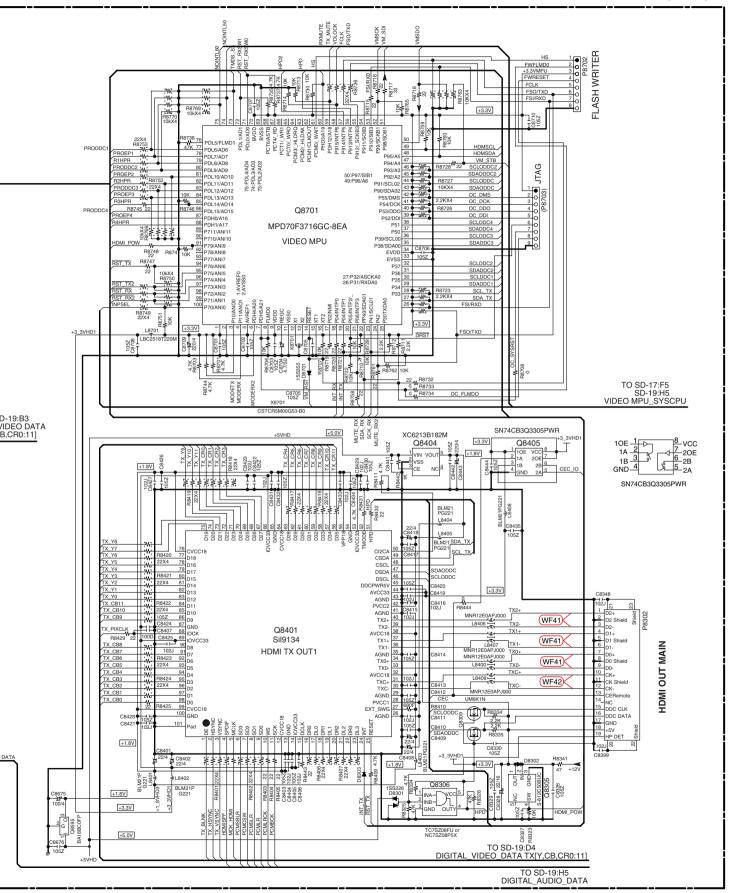

+3.3V

NAHDM-9114(5/5) **U42 HDMI PC BOARD** 

16 bit BUS BUFFER TC74VCX162244FT

16 bit BUS BUFFER TC74VCX162244FT

Q8501 SII9135

20 bit BUS BUFFER TC74VCX162827FT

20 bit BUS BUFFER Q8812 TC74VCX162827FT

RX\_CB8 C\_PIXCLK RX\_CB7 RX\_CB6 RX\_CB5 RX\_CB4

RX\_CB3

EVNODE RX\_BLN +3.3V

VX50 U8001

20E1 2Q10 2Q9 GND 2Q8 2Q7 VCC 2Q6 2Q5 2Q1 1Q10 1Q9 1Q8 GND 1Q7 VCC 1Q4 1Q5 VCC 1Q4 1Q5 VCC 1Q4 1Q5 VCC 1Q4 1Q5 VCC 1Q6 1Q7 VCC 1Q6 1Q7 VCC 1Q6 1Q7 VCC 1Q6 1Q7 VCC 1 VCC 1 VCC 1Q7 VC

TO SD-15:A1 SYNC SIGNAL INPUT

TO SD-15:C1 SYNC SIGAL OUTPUT

> 20 bit BUS BUFFER TC74VCX162827FT

> > 20 bit BUS BUFFER TC74VCX162827FT

+3.3V

| OE2 20E1 | OE2 20E1

| IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E1 | IOE2 20E2 20E1 | IOE2 20E2 20E2 | IOE2 20E

C8856-CL C8871-C88. 104Z


1 2 3


4

5

Ε F G <Note>
SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5. VDECRST AIN12 AIN5 AIN11 AIN4 AIN10 Q8803 B8843 AGND CML REFOUT Q8800 ADV7401 VIDEO DECODER +1.8V +1.8V C8843 TO NAVD-9052 SD-6:F2 I A7106M-TI M-F +3.3V +5.0V NJM2391DL1-25 LBC2518T2R20 L8902 15 & SD-18:G5 /IDEO\_DATA B,CR0:11] Q8401 SII9134 Q8861:A SPI-8010A Q8951 TO NAAR-9075 SD-8:G1 AX4018FSD C8910 104K Q8901 ADV7320 VIDEO ENCODER MAX4018ES Q8860:B TO NADSP-9072 SD-10:B1 MAX4018ESD 12 Q8861:C MAX4018ESD Q8860:C <sub>MLF2012DR47J</sub> 2022 SPI-8010A Q8954 PP 6 Q8963 DTC144EE NJU7313A POWER SUPPLY&RESET CONTROL

E | F | G | H

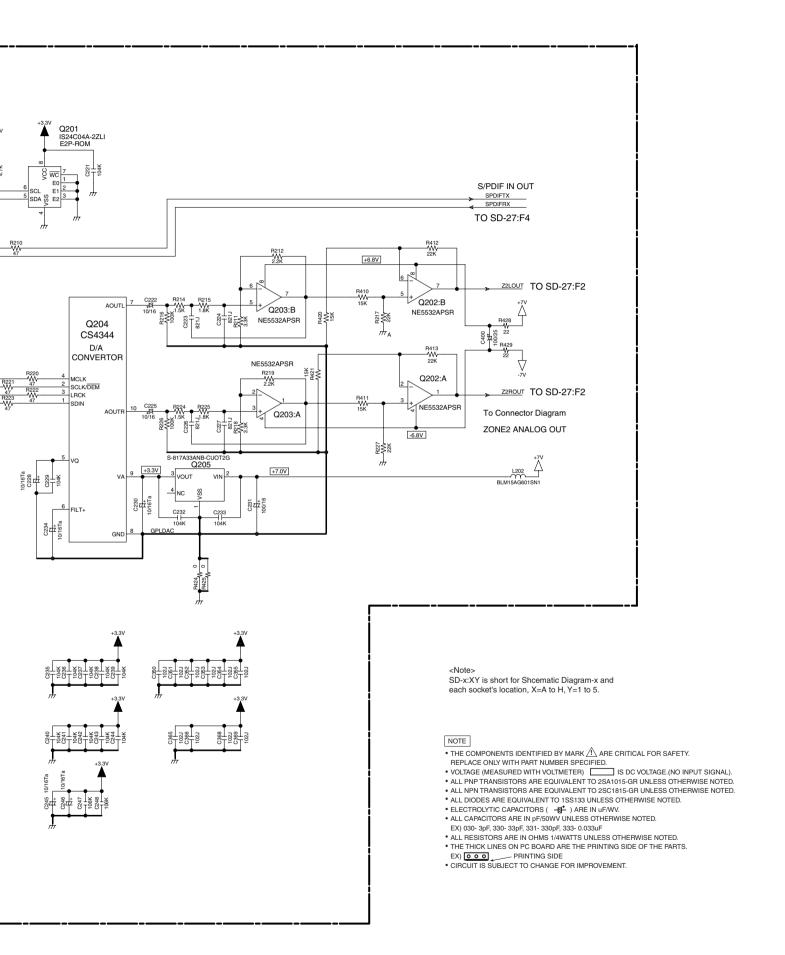

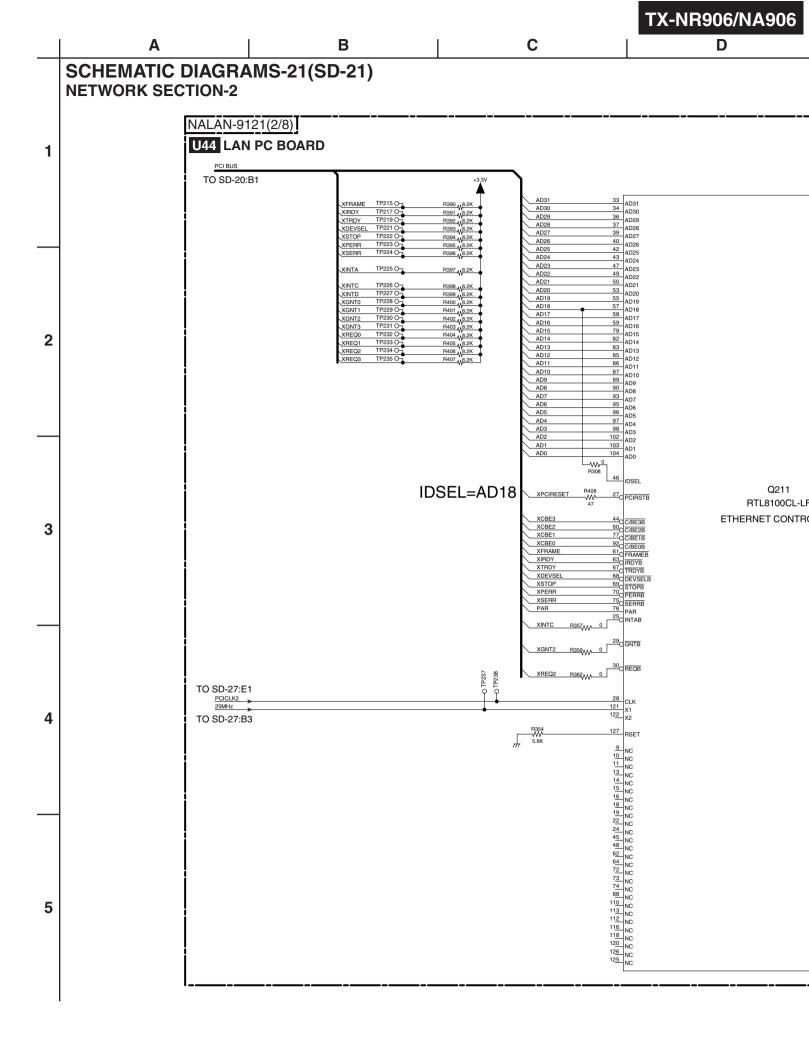

Q209 M93C46-WDW6TP E2P-ROM EECS 109 AUX/EEDI FESK PMER R45J CLKRUNE P200 RX-R302 R303 49.9\_1% 49.9\_1% RX ETHERNET R304 R305 W 49.9\_1% 49.9\_1% 1 12 **Q** 115 LED1 114 LED2 TROLLER CTRL25 +2.5V BLM15AG102AN1 Q210 AVDD25 2SB1197K AVDD33 AVDD33 AVDD33 GND GND VDD2 VDD25 VDD25 VDD25 78 99 VDD25 GND GND GND GND <Note> SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5. NOTE GND GND • THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY. GND 66 GND 81 GND 91 REPLACE ONLY WITH PART NUMBER SPECIFIED.

• VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE.(NO INPUT SIGNAL). GND ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
 ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED. 101 119 123 GND GND GND • ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED. ELECTROLYTIC CAPACITORS ( → □ → → ) ARE IN UF/WV.
 ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED. 128 EX) 030-3pF, 330-33pF, 331-330pF, 333-0.033uF \* ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.

 \* THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS. EX) PRINTING SIDE

• CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

F

G

TX-NR906/NA906

Ε G DATA BUS [0:63] ADDRESS BUS [0:23] TO SD-25:B1 TO SD-25:G4 XRESET TO SD-27:B4

C В **SCHEMATIC DIAGRAMS-23(SD-23) NETWORK SECTION-4** NALAN-9121(4/8) 1 U44 LAN PC BOARD NC(A12) H3 DQ31 DQ31 \ \ \ \ D3 DQ30 D2 B1 DQ29 DQ28 D2 DQ29 D46 3 НЯ A14 D14 6 D42 B1 DQ28 D10 5 BA0 J7 A13 R322 1 C2 DQ27 DQ27 DQ26 R321 1 C2 DQ26 J 2 A1 DQ26 2 D43 8 D11 Н9 **W** \ \ \ \ A11 √D41 D9 3 A2 DQ24 3 C3 DQ25 A11 G7 A10 J3 A10 4 A2 DQ24 5 4 C3 DQ25 D40 Α9 D12 A9 H2 A8 H1 A8 DQ23 R325 -D63 A8 D27 8 C7 DQ22 C7 DQ22 D59 7 \ \ \ \ Α7 D31 7 \ \ \ \ A8 DQ23 A9 DQ21 √D62 3 A6 G3 A6 D30 6 A9 DQ21 A6 G3 A5 G1 A4 F3 A2 F7 C8 DQ20 C8 DQ20 D60 D28 5 R327 1 B9 R328 1 B9 √D61 8 A4 D29 DQ19 DQ19 2 D8 DQ18 2 D8 DQ18 D57 АЗ **W** D25 3 D7 DQ17 4 E8 DQ16 3 D7 DQ17 D58 6 A2 D26 6 A1 G9 A0 G8 4 E8 DQ16 D56 D24 5 A1 R330 1 R1 DQ13 N3 DQ14 R331 1 D33 D4 K4M563233G-HN75T SDRAM 7 \ \ \ \ \* D32 2 R2 D0 7 K4M563233G-HN75T SDRAM DQ15 DO15 N3 DQ14 NC E3 R1 DQ13 D36 6 D1 6 N2 DQ1.
R333 1 P1 DQ11 N2 DQ12 DQ11 DQ11 NC K2 D35 D3 Q213 D34 D2 2 M2 DQ10 3 M3 DQ9 2 M2 DQ10 NC E7 \ \ \ \ D37 D5 82 3 L2 DQ8 \D39 6 √D6 6 4 M3 DQ9 D38 4 L2 DQ8 M7 DQ6 D49 D16 8 L8 DQM3 F2 DQM64LU DO7 3 \ \ \ \ L8 DQ7 D48 D18 7 DQ6 D50 6 M8 DQ5 DOM2 F8 DQM64UU D17 6 M8 DQ5 DQM1 K1 DQM64LL P9 DQ4 D21 5 √D53 P9 R338 1 N8 DQ3 DQ4 R337 1 N8 DQ3 DQM0 K9 DQM64UL D52 8 -2 R9 DQ2 3 R8 DQ0 4 N7 DQ1 2 R9 DQ2 \ \ \ \ D54 D22 3 R8 DQ0 6 6 D55 D23 CLK J1 SDCLK
CKE J2 SDCKE 4 N7 DQ1 **∑**D51 5 D19 C452 104K B2 VDDQ
C453 104K B7 VDDQ
C454 104K C9 VDDQ
C455 104K D9 VDDQ
C455 104K E1 VDDQ
C457 104K L1 VDDQ
C458 104K M9 VDDQ
C458 104K M9 VDDQ
C459 104K P2 VDDQ
C498 104K P2 VDDQ
C499 104K P7 VDDQ C460 | 104K | B2 | VDDQ | C461 | 104K | B7 | VDDQ | C462 | 104K | D9 | VDDQ | C467 | 104K | M9 | VDDQ | C467 | 104K | M9 | VDDQ | C473 | 104K | P2 | VDDQ | C472 | 104K | P7 | VDDQ | C472 | C RAS OJ9 XRAS CAS OK8 XWE CS DJ8 XCS1 4 VDD A7 C474 104K VDD F9 C475 104K VDD C476 104K VDD R7 C497 104K B3 VSSQ B3 VSSQ B8 VSSQ B8 VSSQ VSSQ VSSQ VSSQ VSSQ VSSQ C1 VSSQ D1 VSSQ E9 VSSQ VSSQ VSSQ E9 VSSQ L9 VSSQ M1 VSSQ VSSQ VSSQ M1 VSSQ F1 VSS VSS A3 N1 VSSQ P3 VSSQ VSS L3 P3 VSSQ P8 VSSQ VSS R3 P8 VSSQ BLM15PG100SN1 +3.3V VDD1\_MEM3.3V 10/16Ta 10/16Ta 10/16Ta 106K 106K 106K -28122128128 84184184186 105Z 5

SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5. ADDRESS BUS A[0:22] DATA BUS D[0:64] NOTE THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY.
REPLACE ONLY WITH PART NUMBER SPECIFIED. TO SD-25:B1 VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE.(NO INPUT SIGNAL). ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
 ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED. ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
ELECTROLYTIC CAPACITORS ( - 15 ) ARE IN uF/WV.
ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED. EX) 030-3pF, 330-33pF, 331-330pF, 333-0.033uF

• ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED. • THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS. NC(A12) H3 EX) PRINTING SIDE
• CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT. BA0 J7 A13 Н9 A11 A11 A11 G7 A10 J3 A8 H2 A7 G3 A6 G2 A5 G1 A4 F3 A2 F7 A1 G9 A0 A10 Α9 A8 Α7 A6 A4 АЗ A1 NC E3 NC K2 NC K3 NC E7 NC H7 F2 DQMLU DQM3 F8 DQM2 K1 DQM1 K0 DQMUU DQMLL DQM0 100MHz SDCLK CLK CKE J2 SDCKE RAS O<sup>J9</sup> XRAS CAS OK8 WE OK8 XCAS CS OJ8 XCS1 BLM15PG100SN1 V L215 +3.3V VDD2\_MEM3.3V VDD A7 C468 104K VDD C469 104K VDD C470 104K VDD R7 C471 104K 12215 818 48 818 818 C535 T325T325T325T325T F1 VSS TO SD-25:G4-G5 DQMLU DQMUU DQMLL DQMUL DQM64LU DQM64UU DQM64LL DQM64UL SDCLK SDCKE XRAS XWE

F


G

В C **SCHEMATIC DIAGRAMS-24(SD-24) NETWORK SECTION-5** NALAN-9121(5/8) **U44 LAN PC BOARD** PCI BUS TO SD-21:A1 -1 TO SD-27:B1 <del>→ PCICLK</del> TO SD-27:F4 SUTATUS0 XBOOTMODE0 2 VDDQ V18 VDDQ V18 VDDQ V15 VDDQ V13 VDD J8 K8 L8 VDD VDD VDD -\$81\$81\$81\$81\$ | \$87\$87\$57\$ M8 VDD N8 VDD P8 VDD VDDQ V13 VDDQ V11 VDDQ V11 VDDQ V7 R8 H9 VDDQ V7 VDDQ V5 VDDQ H5 VDD VDD VDD VDDQ VDDQ VDDQ R10 VDD R10 VDD H11 VDD VDD VDD VDDQ D4 VDDQ E5 VDDQ 815 815 8 8 8 8 H12 VDD VDDQ H13 VDD H14 VDD H15 VDD C3 AB1 3 VDDQ C3 VDDQ AB1 VDDQ AA2 VDDQ V3 Q200:F R5S70900BGV RISC MICROPROCESSOR R12 VDD R13 VDD J14 VDD VDDQ Y3 VDDQ W4 VDDQ C20 VDDQ D10 J15 VDD VDD VDD VDD VDD VDDQ D19 VDDQ E18 VDDQ G18 M15 VDD N15 VDD P15 VDD R15 VDD VDD VDD VDD VDD VDD VDDQ R18 VDDQ E16 VDDQ E14 VDDQ F12 VDDQ E12 VDDQ E10 K9 L9 VSS W9 VSS vss J10 VSS K10 VSS L10 VSS VSS V16 V14 V12 V10 VSS V10 4 L10 VSS M10 VSS N10 VSS P10 VSS VSS VSS V8 | VSS VSS V6 VSS A1 VSS B2 VSS G5 M11 G5 J5 L5 VSS N11 VSS VSS VSS vss VSS VSS J12 VSS K12 VSS L12 VSS VSS N5 VSS R5 VSS U5 VSS B21 VSS F18 VSS F18 VSS M18 VSS M18 VSS P18 VSS E17 VSS E15 VSS E13 VSS E11 VSS E11 VSS E11 N12 VSS VSS VSS vss J13 vss K13 VSS L13 VSS M13 VSS 5 T 3 N13 VSS P13 VSS K14 VSS 5 L14 VSS M14 VSS N14 VSS VSS

E2 AD31/CRS\_1 AD31 F3 AD31/CHS\_1 E1 AD30/EXOUT\_1 AD29/COL\_1 AD30 AD29 AD28 AD28 F2 AD27/MII\_TXD3\_1 AD26 F1 AD25/MIITXD2\_1 AD27 AD26 AD25 AD24 AD23 H4 AD24/TX\_ER\_1
AD23/MII\_TXD0\_1
J4 AD22 AD22 AD21 H2 AD21/TX\_EN\_1 J3 H1 AD20 AD19/TX\_CLK\_1 AD18 AD20 AD19 AD18 AD17 AD16 K4 AD18
J2 AD17/RX\_CLK\_1
K3 AD16
N4 AD15
N2 AD14
N3 AD13
N1 AD12
P4 AD11
P2 AD10
P3 AD9
P1 AD8 AD15 AD14 AD13 AD12 AD11 AD10 AD9 IDE VDC Video IN/GPI AD8 P1 AD8 R2 AD7 R3 AD6 AB20 DAR(CVBS) AD6 R1 AD5 T3 AD4 T1 AD3 AB21 AA22 U<u>4</u> U3 AD5 AD4 DAG(Y) DAB(C) PA7/STATUS1/VIN7 PA6/STATUS0/VIN6 PA5/VIN5 V1 AD3 T2 AD2 AD1 AD1 AD0 V2 AD2 AD1 PA4/VIN4 T4 PA0/VIN0 AD0 RISC MICROPROCESSOR XCBE2 XCBE1 XCBE0 PAR XFRAME VIN3/SCK2/PA3 XTRDY XSTOP VCCA Q200:C R5S70900BGV RISC MICROPROCESSOR D1 REQ3
D2 REQ2
C1 REQ1
C2 REQ0/REQOUT
F4 GNT3/LNKSTA\_1 XREQ3 XREQ2 XREQ1 VSSCA VSSCA XREQ0 /DACK1 XGNT3 XGNT2 W20 XGNT1 VCCA1 XGNT0 XSERR STA ETA **XPERR** B3 PCIRESET VSSCA1 <u>W22</u>C <u>INTA</u> <u>V19</u>C <u>INTC/PB6/A24/CTS1</u> <u>INTD/PB7/A25/CTS0</u> R374 VICLK/IRQOUT ₹ 5 5 PCICLK L2C LOCK/FALE H3 IDSEL/RX\_ER\_1 +1.2V VOUT/VFB BLM15PG100SN1 +3.3V • THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED. PGND IS DC VOLTAGE.(NO INPUT SIGNAL). VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE.(NO INPUT SIGNAL).
 ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED. AGND VDD C414 716Ta C415 • ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
• ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
• ELECTROLYTIC CAPACITORS ( → 🚜 → ) ARE IN uF/WV. Q208 R1232D121B-TR-F DC-DC CONVERTOR ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
 EX) 030-3pF, 330-33pF, 331-330pF, 333-0.033uF <Note> • ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED. SD-x:XY is short for Shcematic Diagram-x and • THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS. each socket's location, X=A to H, Y=1 to 5. EX) PRINTING SIDE
• CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

F

G

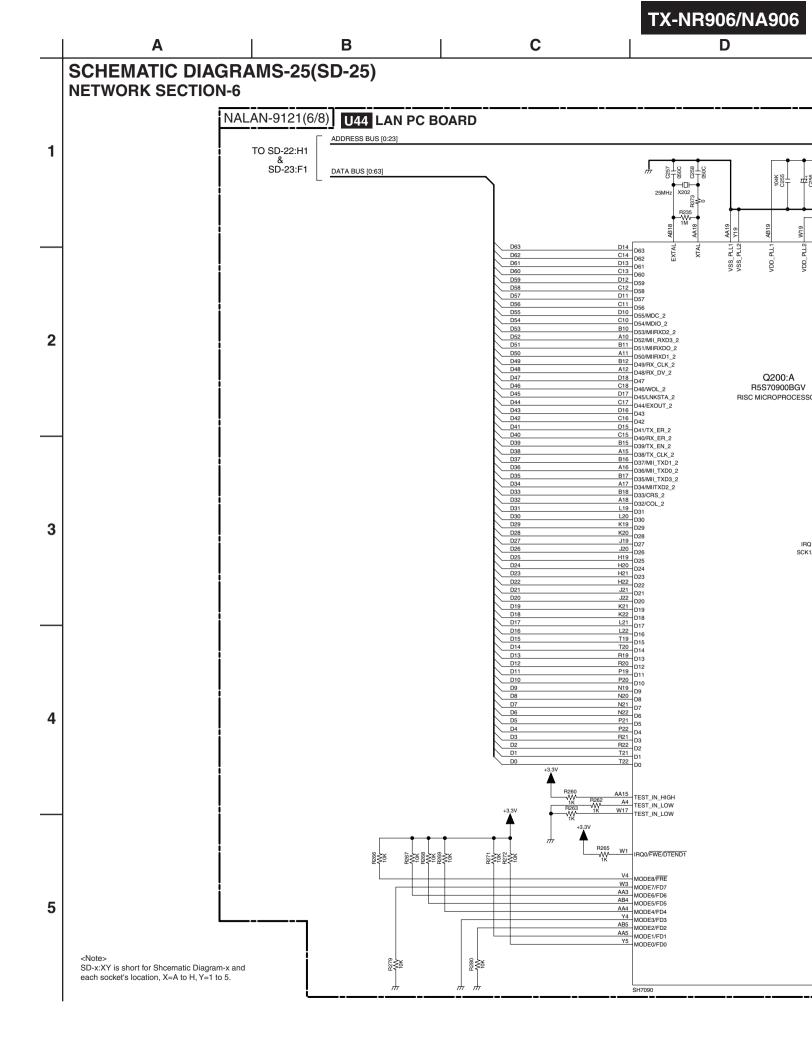

NOTE • THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED. VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE.(NO INPUT SIGNAL).
 ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED. +1.2V BLM15AG601SN1 L204 BLM15AG601SN1 ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED. ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
ELECTROLYTIC CAPACITORS ( →
) ARE IN uF/WV. ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED. EX) 030-3pF, 330-33pF, 331-330pF, 333-0.033uF
• ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED. • THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS. EX) OOO PRINTING SIDE
• CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT. CTS2/INTB/PB5/A23 A22 A21 DREQ0/RTS0/PB4/A22 DACK0/RTS1/PB3/A21 DTENDO/RTS2/PB2/A20 U22 1 R237 A20 PB1/A19 U21 2 PB0/A18 U20 3 A19 A18 U19 4 A17 A17 A16 A16 A13 A13 A14 F21 A14 G22 A15 G19 A12 E22 1 R240 A14 A15 A10 F20 2 F19 3 G20 4 E19 4  $\bigvee_{i=1}^{l}$ A8 A9 A11 A9 F19 3 A11 A7 E20 A6 E21 D22 A4 A20 4 A1 A19 2 A0 C19 1 ٩V ESSOR A5 A4 АЗ \ \ \ \ A1 AB2 SDA AB3 AB7 TCK TCK AA8
TMS
TRST AA9
AB8 TMS TO SD-27:B4,D4 TDI TDI AA7 B4 TDO TDO HUDI\_MPMD MPMD
IRQ1/WDTOVF/AUDCK/DREQ1 AUDCK USER DEBUG ASEBRKAK AUDSYNC SCK1/ASEBBKAK/BBKACK/FB/B TERMINAL SCK0/AUDSYNC/FCLE AUDATA3 AUDATA AUDATA0 TEST\_OUT\_OPEN AB15 85 ₹ ₹ TXD1/AUDATA3 W6 RXD1/AUDATA2 TXD2 RXD2 TXD1 VIN2/RXD2/PA2 VIN1/TXD2/PA1 TXD0/AUDATA1 TO SD-27:F4 RXD0/AUDATA0 RDY AB17 R258 CS2 OA21 CS1 OW18 XRD RAS 0C21 1 R261 CKE 0C22 2 RW 0D21 3 Į ₩ SDCKE XWE M19 DQMUU TO SD-23:H5 DQMUU DQMLU DQMLL DQMLU M20 DQMLL M22 DQMUL M21 MEMORY SECTION DQMUL DQMUL A13 1 R273


DQM64LU/WE3 B13 2 L


DQM64LL/WE0 B14 4 S DQM64LU DQM64UU DQM64LL B14 4 DQM64UL DOM64UI /WF2 XRESET NMI 04A16 R275 TO SD-27:F4 PRESET


F

G

| E | F | G | H

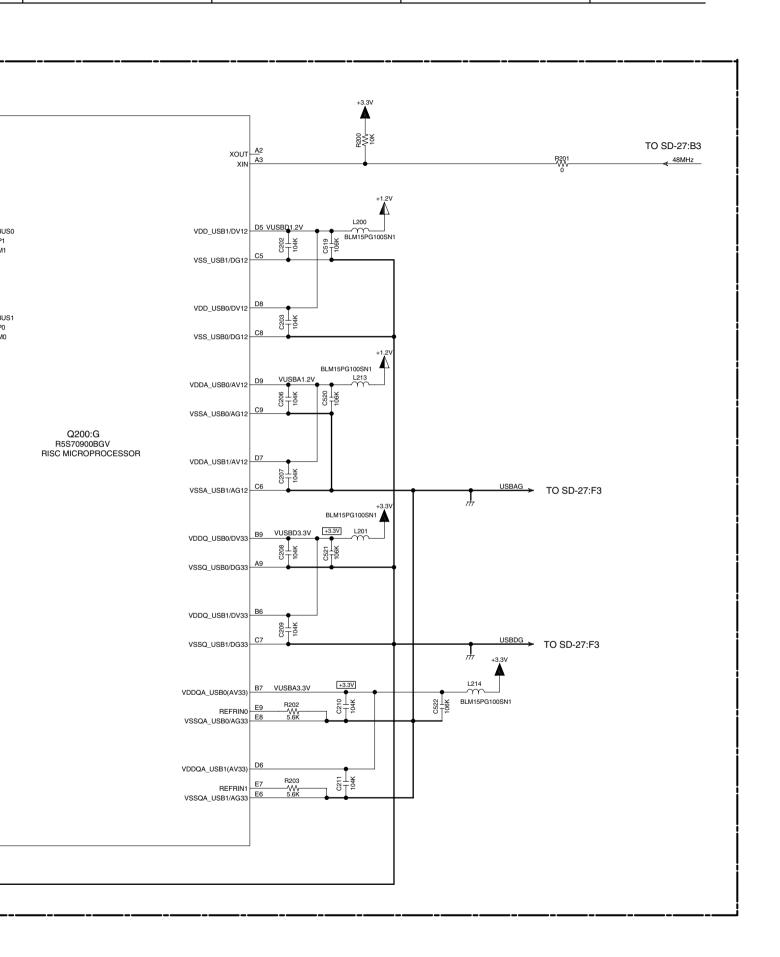

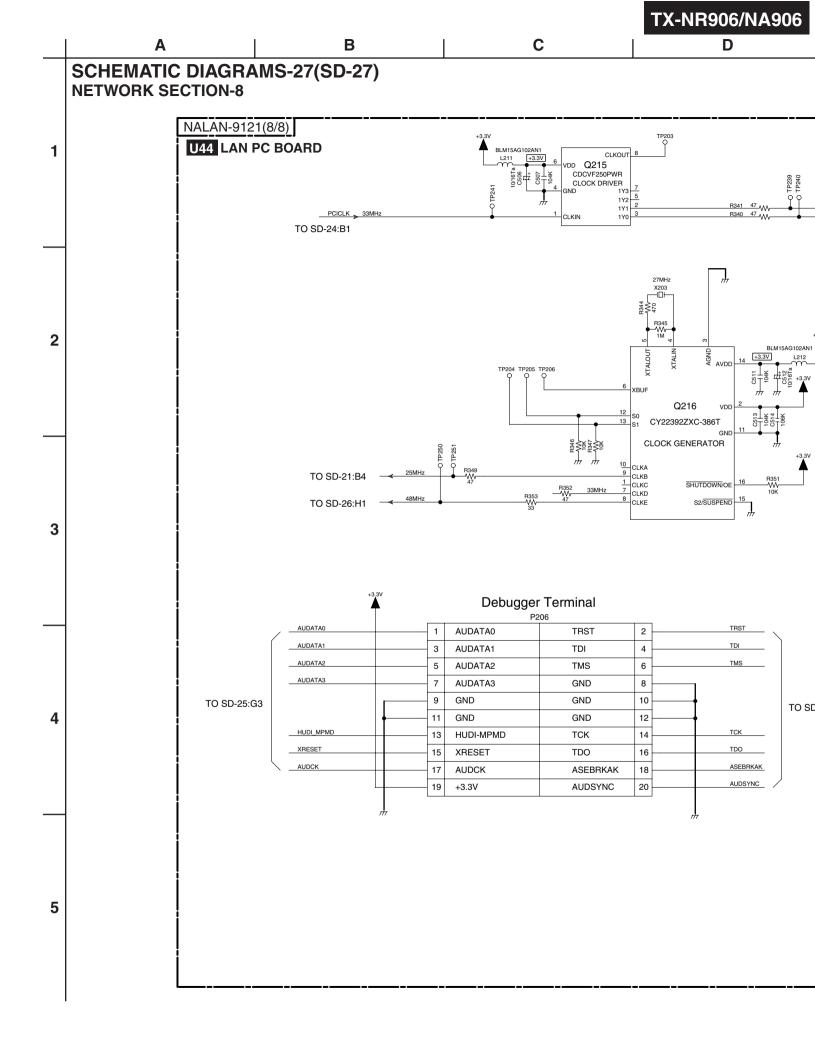

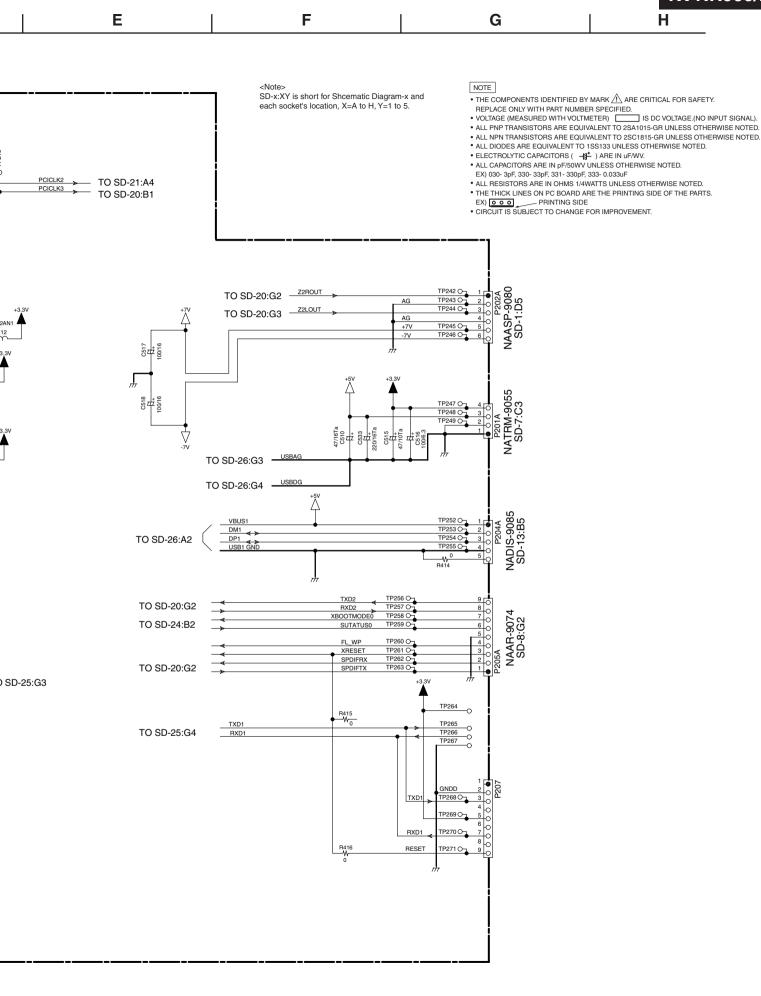

C

### **SCHEMATIC DIAGRAMS-28(SD-28) HD RADIO SECTION**


1

2

3

4

5

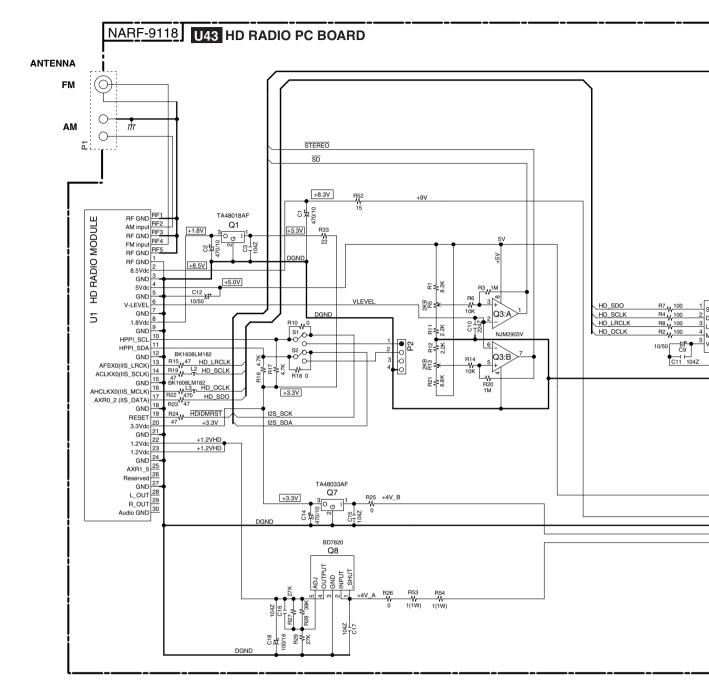

SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

### NOTE

- THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY.
- REPLACE ONLY WITH PART NUMBER SPECIFIED.

   VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE.(NO INPUT SIGNAL).

   ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
   ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS ( → ) ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
   EX) 030-3pF, 330-33pF, 331-330pF, 333-0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED. • THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
- EX) OOO PRINTING SIDE

   CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

+14.9V NE5532APSR Q10:A 2 ch DAC CS4344 Q4 5#4g AOUTR 10 9 8 8 AOUTL FILT+ 2 DEM/SCLK 3 LRCK 4 MCLK VQ # \$500 \$000 -15V AG TO NAAR-9075 SD-8:G3 R\_OUT Q10:B NE5532APSR L\_OUT HDIDMRS -14.9V SD STEREO I2S\_SDA I2S\_SCK хо6213В332МВ Q11 VIN VOUT-VSS CE NC-TO NATRM-9055 SD-7:C3 Q6 TA480

F

G

A B C D

## SCHEMATIC DIAGRAM-29(SD-29) WAVEFORM SECTION

### Digital Audio Waveform Part

### NOTE:

1

2

3

4


5

- 1. WF01) is short for Waveform01)
- Refer to SD-9(SCHEMATIC DIAGRAM-9) for the location of each waveform on circuit.
- 3. SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.


LR CLOCK (SAI\_LRCK, CX\_LRCK)
Fs=48kHz:DVD, Clock width=20.8us
Fs=44.1kHz:CD, Clock width=22.7us

BIT CLOCK (SAI\_SLCK, CX\_SLCK) 64Fs=3072kHz : DVD, Clock width=325ns 64Fs=2822.4kHz : CD, Clock width=354ns

(WF01) OPT1 (SD-9:B2)




(WF02) COAX1 (SD-9:C2)




Duty always varies according to audio data

WF03 SAI\_SDOUT (SD-9:B4)




Duty varies according to audio data


(WF04) SAI\_LRCK (SD-9:B4)




(WF05) SAI\_SLCK (SD-9:C4)




WF06) CX\_SDIN1 (SD-9:D4)




(WF07) CX\_LRCK (SD-9:D4)



WF08 CX\_SCLK (SD-9:D4)




(WF09) DAC\_OUT- (SD-9:E4)




Analog audio waveform with aliasing noise

(WF10) AUDIO\_FL (SD-9:G3)



Analog audio waveform with aliasing noise





Aliasing noise in no audio data


E | F | G | H


### Video Waveform Part

### Video source color and pattern











### NOTE:

- 1. WF21 is short for Waveform21
- 2. Refer to SD-6(SCHEMATIC DIAGRAM-6) for the location of each waveform on circuit.
- 3. SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.
- In the case that video outputs are not connected to video devices, video signal output levels are doubled.

### Component Y waveform






720 mVp-p

# (WF26) SD-6:B2

Component PR waveform


### **HDMI Waveform Part**


## HDMI D0,D1,D2 waveform (WF41) SD-17:B5, H4 /SD-18:4G



D0,D1,D2 Eye-pattern waveform, frequency and level vary according to video resolution, aspect and profile. Waveforms above are examples.

### HDMI CK waveform







CK waveform, frequency and level differ according to video resolution, aspect and profile. D0,D1,D2 are just CK x10.


### FL Driver IC Control Waveform Part

### SCK/SDATA waveform







### SCK/CS waveform




### SCK/RESET waveform






### **PACKING PROCEDURE-1**

DC, DD Type

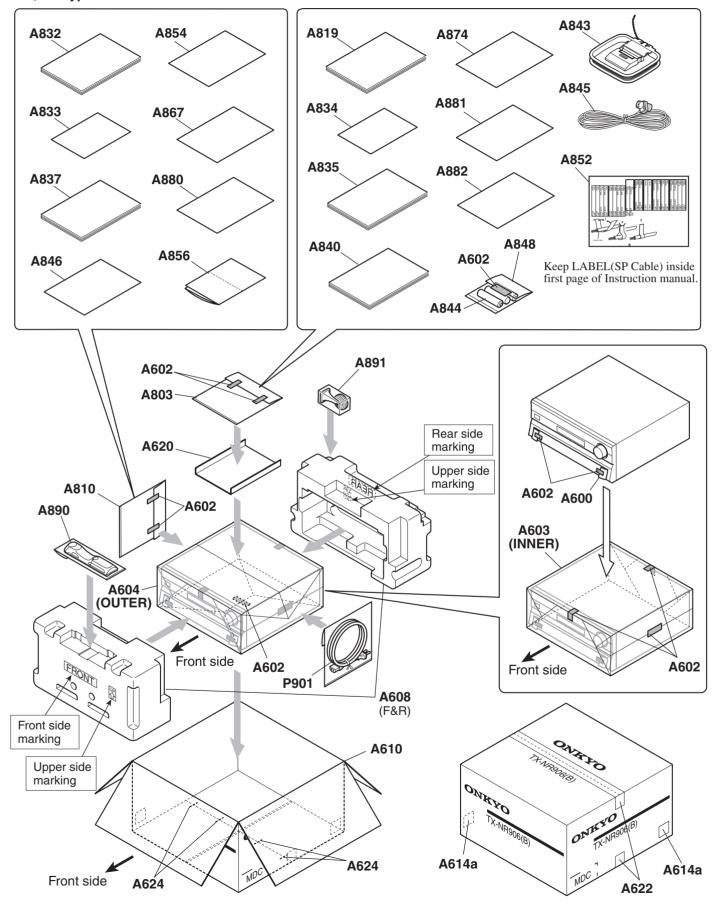

### **PACKING PROCEDURE-2**

MP, MT, DT, NA906 Type

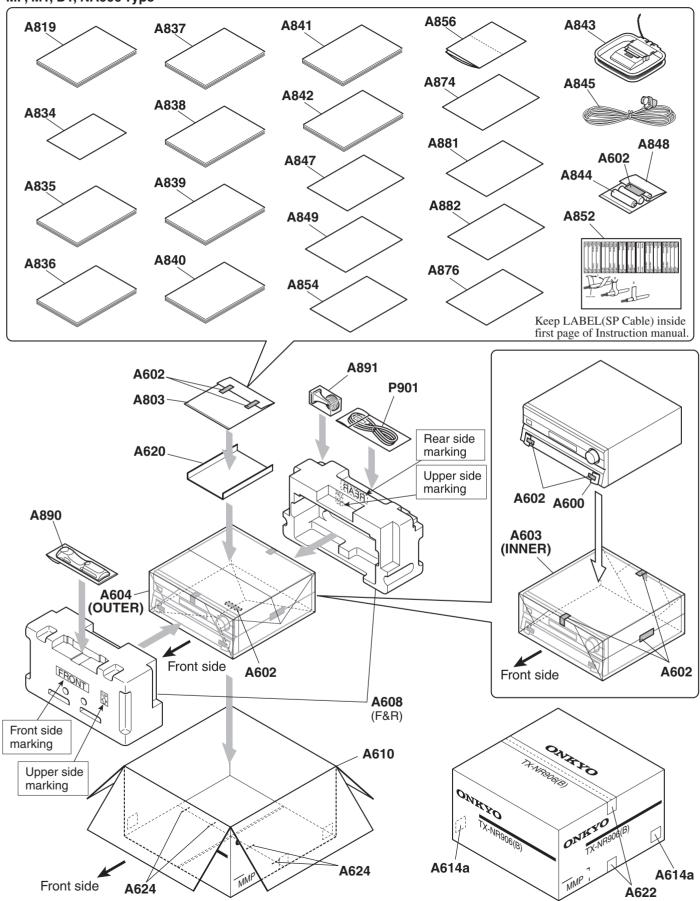

### TX-NR906/NA906

### <Note>

- 1.Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
- 2.ICs marked by "NRP" are not replaceable because some pins on bottom are unable to see and solder..

NOTE: THE COMPONENTS IDENTIFIED BY THE MARK
! ARE CRITICAL FOR RISK OF FIRE AND
ELECTRIC SHOCK. REPLACE ONLY WITH PAR'
NUMBER SPECIFIED.

### <Notes>

(B): TX-NR906 Black model <DC>: TX-NR906 USA and Canadian model

 $(G): TX-NR906 \ Golden \ model \\ <DD>: TX-NR906 \ USA \ model$ 

 (S): TX-NR906 Silver model
 <DT>: TX-NR906 Asian model for 120V

 <NR906>: TX-NR906
 <MP>: TX-NR906 European model

### **EXPLODED VIEW PARTS LIST**

| REF. NO. | PART NAME    | DESCRIPTION       | Q'TY | PART NO. (SN) | REMARKS |
|----------|--------------|-------------------|------|---------------|---------|
| A001     | HEAT SINK    | 238               | 2    | 27160605B     |         |
| A004     | ISO PLT      | (HS)              | 1    | 28175334      |         |
| A005     | SPACER       | (PC)              | 8    | 27270485      |         |
| A007     | SCREW        | 3P+6FN(3BC)       | 17   | 82143006GR    |         |
| A008     | SCREW        | 3TTB+8B(3CM)SR    | 88   | 801637        |         |
| A009     | SCREW        | 3SMS8W.SW+14B(CU) | 28   | 801634        |         |
| A011     | RETAINER     | (HS-2)            | 2    | 27141530A     |         |
| A014     | SPACER       | t0.5x8x3.2        | 3    | 27270438      |         |
| A015     | CHASSIS      | (SUB)             | 1    |               | NSP     |
| A018     | CUSHION      | (T3*W35*D10)      | 1    | 28141741      |         |
| A021     | CUSHION      | (BUTYL)           | 1    | 28141748      |         |
| A022     | TAPE         | TAPE(CLOTH-8U)    | 6    | 29110082      |         |
| A024     | CUSHION      | (BUTYL)           | 1    | 28141748      |         |
| A025     | HEAT SINK(S) | 240               | 1    | 27160608      |         |
| A030     | ISO PLT      | (AMP2)            | 1    | 28175333      |         |
| A031     | RIVET        | P-RIVET NRP-345   | 2    | 880009        |         |
| A032     | CUSHION      | T5*8*8            | 2    | 28141742      |         |
| A033     | ISO PLT      | (AMP)             | 1    | 28175331A     |         |
| A038     | ISO PLT      | (FFC)             | 1    | 28175332      |         |
| A039     | PLA RIVET    | P3035B            | 2    | 880016        |         |
| A040     | BRACKET      | (FAN-L)           | 1    | 27131022A     |         |
| A042     | HOLDER       | (FAN)             | 4    | 27191307      |         |
| A044     | BRACKET      | (FAN-R)           | 1    | 27131023A     |         |
| A046     | HOLDER       | (FAN)             | 4    | 27191307      |         |
| A048     | BRACKET      | (MID)             | 1    | 27131021B     |         |

| A049          | TAPE       | TAPE(CLOTH-16U)      | 3  | 29110083             |                   |
|---------------|------------|----------------------|----|----------------------|-------------------|
| A054          | SPACER     | t0.5x8x3.2           | 2  | 27270438             |                   |
| A055          | BRACKET    | (PT)                 | 1  | 27131024B            |                   |
| A056          | SCREW      | 4TTC+8C(3BC)         | 18 | 830440089GR          |                   |
| A057          | BUSHING    | L30                  | 2  | 28170006             |                   |
| A058          | LABEL      | (PT)                 | 1  | 29363379-1           |                   |
| A060          | HOLDER     | (EDGE)               | 2  | 27191309             |                   |
| A061          | SPACER     | (LDGL)               | 4  | 27270489             |                   |
| A062          | CLAMP      | (NAD-09)             | 1  | 24840176             |                   |
| A063          | BUSHING    | BUSHING              | 2  | 28170040             |                   |
| A064          | BUSHING    | BUSHING              | 1  | 28170040             |                   |
| A065          | BUSHING    | BUSHING              | 1  | 28170041             |                   |
| A066          | CHASSIS    | Degrinte             | 1  |                      | NSP               |
| A067          | CUSHION    | (BUTYL)              | 1  | 28141748             | INSF              |
| A068          | CUSHION    | (LEG)                | 4  | 28141735             |                   |
| A069          | LEG        | ```                  | 4  | 27175437             |                   |
| A070          | CUSHION    |                      | 8  | 28141637             |                   |
| A072          | HEAT SINK  | (CD)                 | 1  |                      |                   |
| A072A         | SPACER     | (SP)<br>t0.5*w30*d10 | 1  | 27160610<br>27270495 |                   |
| A072A<br>A075 | HOLDER     | KGLS-14RT            | 3  |                      |                   |
|               |            |                      |    | 27190524             |                   |
| A076          | HOLDER     | (SPD-6)              | 4  | 27191308             |                   |
| A078          | HOLDER     | KGPS-10RF            | 3  | 27190813             |                   |
| A079          | CUSHION    | (BUTYL)              | 1  | 28141748             |                   |
| A084          | SPACER     | t0.5*w13*d5          | 1  | 27270514             |                   |
| A086          | BRACKET    | (F)                  | 1  | 27131020C            |                   |
| A090          | HOLDER     | SPM-4                | 5  | 27191154             |                   |
| A092          | HOLDER     | KGLS-10RT            | 1  | 27190428A            |                   |
| A094          | HOLDER     | KGLS-10S             | 2  | 27190896             |                   |
| A096          | HOLDER     | KGPS-6RF             | 2  | 27191112             |                   |
| A098          | HOLDER     | KGLS-12S             | 1  | 27190062             |                   |
| A100          | HOLDER     | HOLDER KGLS-18S      | 1  | 27190470             |                   |
| A104          | HOLDER     | KGLS-22S             | 1  | 27190369             |                   |
| A105          | HOLDER     | KGLS-22RT            | 1  | 27190772             |                   |
| A106          | HOLDER     | KGLS-12RT            | 1  | 27190266             |                   |
| A110          | REAR PANEL | TXNR906MDC           | 1  | 27123921             | <dc, dd=""></dc,> |
| A110          | REAR PANEL | TXNR906MMP           | 1  | 27123922             | <mp></mp>         |
| A110          | REAR PANEL | TXNR906MDT           | 1  | 27123923             | <dt></dt>         |
| A110          | REAR PANEL | TXNR906MMT           | 1  | 27123924             | <mt></mt>         |
| A110          | REAR PANEL | TXNA906MMR           | 1  | 27123925             | <na906></na906>   |
| A112          | SCREW      | 3TTB+8B(3BC)         | 65 | 838430088GR          | <dc, dd=""></dc,> |
| A112          | SCREW      | 3TTB+8B(3BC)         | 63 | 838430088GR          | <mp></mp>         |
| A112          | SCREW      | 3TTB+8B(3BC)         | 62 | 838430088GR          | <dt, mt=""></dt,> |
| A112          | SCREW      | 3TTB+8B(3BC)         | 59 | 838430088GR          | <na906></na906>   |
| A114          | SCREW      | 4TTB+8C(3BC)         | 2  | 838440089GR          |                   |
| A116          | WASHER     | W3*10F(3BC)          | 1  | 87643010GR           |                   |
| A118          | TRM        | E TERMINAL           | 1  | 25060151             |                   |
| A120          | WIRE TIE   | BSK-1                | 18 | 260208               |                   |
| A122a         | LABEL      | (E-CON)              | 1  | 29364978             |                   |
|               |            | ` ′                  |    |                      |                   |

| A124         | SHLD CASE  | (A)                 | 1   | 27225169A              |                                  |
|--------------|------------|---------------------|-----|------------------------|----------------------------------|
| A126         | SHLD CASE  | (B)                 | 1   | 27225170               |                                  |
| A128         | SHLD CASE  | (C)                 | 1   | 27225171               | <dc, dd=""></dc,>                |
| A132         | RETAINER   | (E)                 | 1   | 27142078               |                                  |
| A133         | RETAINER   | (E)                 | 1   | 27142078               | <dc, dd=""></dc,>                |
| A133A        | SCREW      | 3TTB+8B(3CM)SR      | 1   | 801637                 | <dc, dd=""></dc,>                |
| A134         | RETAINER   | (SIDE)              | 2   | 27142079               |                                  |
| A137         | CUSHION    | t5*30*5             | 2   | 28141562               |                                  |
| A138         | CUSHION    | (T3*W35*D10)        | 1   | 28141741               | <dc, dd=""></dc,>                |
| A139         | CUSHION    | (BUTYL)             | 1   | 28141748               |                                  |
| A140         | CUSHION    | (BUTYL)             | 1   | 28141748               |                                  |
| A141         | IB CUSHION | W15*3t TAPE         | 1   | 28141585               |                                  |
| A142         | IB CUSHION | W15*3t TAPE         | 1   | 28141585               |                                  |
| A143         | IB CUSHION | W15*3t TAPE         | 1   | 28141585               |                                  |
| A150         | LABEL      | (SP)                | 1   | 29390588               |                                  |
| A174         | BUSHING    | CE-016 100MM        | 1   | 28170039               |                                  |
| A190         | PVC        | UL1015 #16.16/66BLK | 1   | 72140220505            |                                  |
| A190 or      | PVC        | UL1015#16.16/66WHT  | (1) | 72149220505            |                                  |
| A201         | BADGE      | BADGE               | 1   | 28135244               | (B), (B) <na906></na906>         |
| A201         | BADGE      |                     | 1   | 28135298               | (S)                              |
| A201         | BADGE      | BADGE               | 1   | 28135245               | (G), (G) <na906></na906>         |
| A205         | HOLDER     | (L)(B)              | 1   | 27191294               | (B), (B) <na906></na906>         |
| A205         | HOLDER     | (L)(S)              | 1   | 27191295               | (S)                              |
| A205         | HOLDER     | (L)(G)              | 1   | 27191296               | (G), (G) <na906></na906>         |
| A207         | HOLDER     | (R)(B)              | 1   | 27191297A              | (B), (B) <na906></na906>         |
| A207         | HOLDER     | (R)(S)              | 1   | 27191298A              | (S)                              |
| A207         | HOLDER     | (R)(G)              | 1   | 27191299A              | (G), (G) <na906></na906>         |
| A209         | HINGE      | (L)(B)              | 1   | 28180184B              | (B), (B) <na906></na906>         |
| A209         | HINGE      | (L)(S)              | 1   | 28180185B              | (S)                              |
| A209         | HINGE      | (L)(G)              | 1   | 28180186B              | (G), (G) <na906></na906>         |
| A211         | HINGE      | (R)(B)              | 1   | 28180187B              | (B), (B) <na906></na906>         |
| A211         | HINGE      | (R)(S)              | 1   | 28180188B              | (S)                              |
| A211         | HINGE      | (R)(G)              | 1   | 28180189B              | (G), (G) <na906></na906>         |
| A213         | RETAINER   | (DOOR)              | 1   | 27142060A              | (G), (G)<1417002                 |
| A215         | RETAINER   | (HOLDER)            | 1   | 27142061               |                                  |
| A217         | PUSH LATCH | 091Y                | 1   | 27230047               |                                  |
| A219         | DAMPER     | 29T0-F              | 1   | 27301960               |                                  |
| A221         | GEAR       | 27101               | 1   | 27301946A              |                                  |
| A223         | SCREW      | 2TTB+8B(3CM)        | 1   | 838120088GR            |                                  |
| A231         | SCREW      | 3TTB+8B(3BC)        | 8   | 838430088GR            | (B), (G)                         |
| A231         | SCREW      | 3TTB+8B(3BC)        | 9   | 838430088GR            | (B), (G)<br>(S)                  |
| A239         | CUSHION    | t1.0*5*5            | 1   | 28141511               | (3)                              |
| A251         | F BRACKET  | (B)                 | 1   | 27111477C              | (B), (B) <na906></na906>         |
| A251<br>A251 | F BRACKET  | .(S)                | 1   | 27111477C<br>27111484C | (B), (B) <na900><br/>(S)</na900> |
| A251<br>A251 | F BRACKET  | NeGo                | 1   | 27111484C<br>27111510A |                                  |
| A253         | KNOB       | (PA)AS              | 1   | 28326530A              | (G), (G) <na906></na906>         |
| A253<br>A253 | KNOB       | (PA)AS<br>(PA)AS    | 1   | 28326533A              | (B), (B) <na906></na906>         |
| A253<br>A253 | KNOB       |                     | 1   |                        | (S)<br>(C) (C) (NA 0065          |
| M233         | MNUD       | (PA)AS(Ne-G)        | 1   | 28326632               | (G), (G) <na906></na906>         |

| A255         | FACET     | (VOL)                    | 1   | 28200023A   |                                    |
|--------------|-----------|--------------------------|-----|-------------|------------------------------------|
| A256         | KNOB      | (STBY)AS                 | 1   | 28326539A   | (B), (B) <na906></na906>           |
| A256         | KNOB      | (STBY)AS                 | 1   | 28326540A   | (S)                                |
| A256         | KNOB      | (STBY)AS                 | 1   | 28326541A   | (G), (G) <na906></na906>           |
| A257         | GUIDE     | (INPUT)B                 | 2   | 27268196    | (B), (B) <na906></na906>           |
| A257         | GUIDE     | (INPUT)S                 | 2   | 27268197    | (S)                                |
| A257         | GUIDE     | (INPUT)906G              | 2   | 27268225    | (G), (G) <na906></na906>           |
| <b>A</b> 259 | B PLATE   | .(B)                     | 1   | 28133428    | (B)                                |
| A259         | B PLATE   | .(S)                     | 1   | 28133429    | (S), (G), <na906></na906>          |
| A261         | RETAINER  | (PWB)                    | 1   | 27142064    |                                    |
| A262         | CUSHION   | (T10*A40*B10)            | 2   | 28141747    |                                    |
| <b>A</b> 270 | CUSHION   | t5*30*5                  | 2   | 28141562    |                                    |
| A281         | KNOB      | (VOL)AS                  | 1   | 28326550    | (B), (B) <na906></na906>           |
| A281         | KNOB      | (VOL)AS                  | 1   | 28326551    | (S)                                |
| A281         | KNOB      | (VOL)AS                  | 1   | 28326552    | (G), (G) <na906></na906>           |
| A283         | CUSHION   |                          | 3   | 28141637    | <u> </u>                           |
| A301         | F PANEL   | TXNR906B                 | 1   | 27213161    | (B), (B) <na906></na906>           |
| A301         | F PANEL   | TXNR906S                 | 1   | 27213162    | (S)                                |
| A301         | F PANEL   | TXNR906G                 | 1   | 27213163    | (G), (G) <na906></na906>           |
| A302         | SPACER    | T0.5*8*3.5               | 3   | 27270463    | (3), (3) 411300                    |
| A302 or      | SPACER    |                          | (3) | 27270489    |                                    |
| A303         | CLEAR PLT | TXNR906                  | 1   | 28192214A   |                                    |
| A311         | DOOR      | 906BD                    | 1   | 28148716    | <dc></dc>                          |
| A311         | DOOR      | 906SD                    | 1   | 28148717    | <dd></dd>                          |
| A311         | DOOR      | 906BP                    | 1   | 28148718    | (B) <mp></mp>                      |
| A311         | DOOR      | 906SP                    | 1   | 28148719    | (S) <mp, mt=""></mp,>              |
| A311         | DOOR      | 906GT                    | 1   | 28148720    | (G) <mt, dt=""></mt,>              |
| A311         | DOOR      | 906GR                    | 1   | 28148721    | (G) <na906></na906>                |
| A311         | DOOR      | 906BMR                   | 1   | 28148729    | (B) <na906></na906>                |
| A313         | PLATE     | (DOOR)905BD              | 1   | 27262790A   | <dc></dc>                          |
| A313         | PLATE     | (DOOR)905SD              | 1   | 27262791B   | <dd></dd>                          |
| A313         | PLATE     | (DOOR)905BP              | 1   | 27262794A   | (B) <mp></mp>                      |
| A313         | PLATE     | (DOOR)905SP              | 1   | 27262795B   | (S) <mp, mt=""></mp,>              |
| A313         | PLATE     | (DOOR)906GT              | 1   | 27262821    | (G) <mt, dt=""></mt,>              |
| A313         | PLATE     | (DOOR)906GR              | 1   | 27262819    | (G) <na906></na906>                |
| A313         | PLATE     | (DOOR)900GR<br>(DOOR)BMR | 1   | 27262825    | ` '                                |
| A315         | KNOB      | (POW) (B)                | 1   | 28326454    | (B) <na906></na906>                |
| A315         | KNOB      | (POW)(S)                 | 1   | 28326585    | (B) <mp, na906=""></mp,>           |
| A315         | KNOB      | (POW)(Ne-G)              | 1   | 28326630    | (S) <mp, mt=""></mp,>              |
|              | SCREW     |                          | 2   |             | (G) <dt, mt,="" na906=""></dt,>    |
| A321         |           | 3P+10FN(3BC)             |     | 82143010GR  | <mp, dt,="" mt,="" na906=""></mp,> |
| A400         | COVER     | (B) (Bent)               | 1   | 28184989A   | (B), (B) <na906></na906>           |
| A400         | COVER     | (S) (Bent)               | 1   | 28184990A   | (S)                                |
| A400         | COVER     | (G) (Bent)               | 1   | 28184991A   | (G), (G) <na906></na906>           |
| A400         | COVER     | (B) (Not bent)           | 1   | 28184989AZ  | (B) <dc></dc>                      |
| A400         | COVER     | (S) (Not bent)           | 1   | 28184990AZ  | (S) <dd></dd>                      |
| A402         | ST SCREW  | 4TTB+8C(NI)              | 6   | 838240089   | (S), (G), (G) <na906></na906>      |
| A402         | SCREW     | 4TTB+8C(3BC)             | 6   | 838440089GR | (B) <na906></na906>                |
| A404         | SCREW     | 4TTB+8C(3BC)             | 6   | 838440089GR | (B)                                |

| A406                          | SCREW       | 3TTB+8B(3CM)SR                      | 3               | 801637                        | (S), (G), (G) <na906></na906>           |
|-------------------------------|-------------|-------------------------------------|-----------------|-------------------------------|---|
| A406                          | SCREW       | 3TTB+8B(3BC)                        | 3               | 838430088GR                   | (B), (B) <na906></na906>                |
| A410                          | LABEL       | (CAUTION)                           | 1               | 29363796                      | (B), (B) <na906></na906>                |
| A410                          | LABEL       | (CAUTION)                           | 1               | 29363797                      | (S)                                     |
| A410                          | LABEL       | (CAUTION)                           | 1               | 29363798                      | (G), (G) <na906></na906>                |
| A411                          | LABEL       | HOOKUP-ONKYO                        | 1               | 29363194                      | <dc, dd=""></dc,>                       |
| A420                          | LABEL       | (PFS)                               | 1               | 29390077                      |   |
| F2501                         | FUSE        | 4A-UL/T-233                         | 1               | 252325GR                      | !                                       |
| F2501 or                      | FUSE        | 4A-T/UL-ST2                         | (1)             | 252257GR                      | !                                       |
| F2502                         | FUSE        | 4A-UL/T-233                         | 1               | 252325GR                      | !                                       |
| F2502 or                      | FUSE        | 4A-T/UL-ST2                         | (1)             | 252257GR                      | !                                       |
| F6601                         | FUSE        | 20A-UL-250V                         | 1               | 252304GR                      | !                                       |
| F6602                         | FUSE        | 20A-UL-250V                         | 1               | 252304GR                      | !                                       |
| F6603                         | FUSE        | 20A-UL-250V                         | 1               | 252304GR                      | !                                       |
| F6604                         | FUSE        | 20A-UL-250V                         | 1               | 252304GR                      | !                                       |
| F9000                         | FUSE        | 5A-UL/T-233                         | 1               | 252326GR                      | !, <dc, dd=""></dc,>                    |
| F9000 or                      | FUSE        | 5A-T/UL-ST2                         | (1)             | 252258GR                      | !, <dc, dd=""></dc,>                    |
| F9100                         | FUSE        | 12A-UL-ST6                          | 1               | 252340GR                      | !, <dc, dd,="" dt=""></dc,>             |
| F9100                         | FUSE        | 6.3A-SE-EAK FUSE                    | 1               | 252079GR                      | !, <mp, dt,="" mt,="" na906=""></mp,>   |
| F9100 or                      | FUSE        | 6.3A-SE-TL250V                      | (1)             | 252279GR                      | !, <mp, dt,="" mt,="" na906=""></mp,>   |
| F9101                         | FUSE        | 4A-UL/T-233                         | 1               | 252325GR                      | !                                       |
| F9101 or                      | FUSE        | 4A-T/UL-ST2                         | (1)             | 252257GR                      | į                                       |
| F9102                         | FUSE        | 4A-UL/T-233                         | 1               | 252325GR                      | 1                                       |
| F9102 or                      | FUSE        | 4A-T/UL-ST2                         | (1)             | 252257GR                      | į                                       |
| F9201                         | FUSE        | 2.5A-UL/T-233                       | 1               | 252321GR                      | !, <dc, dd=""></dc,>                    |
| F9201 or                      | FUSE        | 2.5A-T/UL-ST2                       | (1)             | 252254GR                      | !, <dc, dd=""></dc,>                    |
| F9202                         | FUSE        | 2.5A-UL/T-233                       | 1               | 252321GR                      | !, <dc, dd=""></dc,>                    |
| F9202 or                      | FUSE        | 2.5A-T/UL-ST2                       | (1)             | 252254GR                      | !, <dc, dd=""></dc,>                    |
| F9203                         | FUSE        | 2.5A-UL/T-233                       | 1               | 252321GR                      | 1                                       |
| F9203 or                      | FUSE        | 2.5A-T/UL-ST2                       | (1)             | 252254GR                      | į                                       |
| F9301                         | FUSE        | 4A-UL/T-233                         | 1               | 252325GR                      | 1                                       |
| F9301 or                      | FUSE        | 4A-T/UL-ST2                         | (1)             | 252257GR                      | į                                       |
| P061                          | FAN         | D09A-12PG13                         | 1               | 24502328                      |   |
| P062                          | FAN         | D09A-12PG13                         | 1               | 24502328                      |   |
| P101                          | FFC         | NCFC7-134512                        | 1               | 2047134512                    | <dc, dd=""></dc,>                       |
| P101                          | FFC         | NCFC7-132012                        | 1               | 2047132012                    | <mp, dt="" mt,=""></mp,>                |
| P102                          | FFC         | NCFC7-181012                        | 1               | 2047181012                    | <dc, dd=""></dc,>                       |
| P202                          | SOCKET AS   | NSAS-12P1272                        | 1               | 20044191220UL                 |   |
| P204                          | SOCKET AS   | NSAS-10P1677                        | 1               | 2009991075UL                  |   |
| P205                          | FFC         | NCFC5-092012                        | 1               | 2045092012                    |   |
| P2801                         | FFC         | NCFC7-311012                        | 1               | 2047311012                    |   |
| P6800                         | P RIVET     | JB-407A-C                           | 18              | 880052                        | <mp, dt,="" mt,="" na906=""></mp,>      |
| P7501                         | FFC         | NCFC7-405522                        | 1               | 2047405522                    | , |
| P9008                         | SOCKET AS   | NSAS-6P1675                         | 1               | 2009991073UL                  | <mp, dt,="" mt,="" na906=""></mp,>      |
| O4907                         | TR          | 2SB1565-E                           | 1               | 2202715                       | ,,,,,,                                  |
| •                             |             |                                     |                 |                               |   |
|                               |             |                                     |                 |                               |   |
| •                             |             |                                     |                 |                               |   |
| Q4907 or<br>Q4908<br>Q4908 or | TR TR TR TR | 2SA1488-Y<br>2SD2394-E<br>2SC3851-Y | (1)<br>1<br>(1) | 2203394<br>2202705<br>2203384 |   |

| Q6050             | TR        | 2SC5242-O              | 1   | 2202843 |  |
|-------------------|-----------|------------------------|-----|---------|--|
| Q6050 or          | TR        | 2SC5242-R              |     | 2202842 |  |
| Q6050A            | ISO SHEET | ISO SHEET(SR805_3CH)   | (1) | 223047  |  |
| Q6050A<br>Q6051   | TR        | 2SC5242-O              | 1   | 2202843 |  |
| Q6051 or          | TR        | 2SC5242-0<br>2SC5242-R | (1) | 2202842 |  |
| Q6051 or<br>Q6052 | TR        | 2SC5242-N<br>2SC5242-O | 1   | 2202843 |  |
| Q6052 or          | TR        | 2SC5242-R              | (1) | 2202842 |  |
| Q6053             | TR        | 2SC5242-N<br>2SC5242-O | 1   | 2202842 |  |
| Q6053 or          | TR        | 2SC5242-R              | (1) | 2202842 |  |
| Q6053 01<br>Q6054 | TR        | 2SC5242-N<br>2SC5242-O | 1   | 2202843 |  |
| Q6054 or          | TR        | 2SC5242-R              | (1) | 2202842 |  |
| Q6054 or<br>Q6055 | TR        | 2SC5242-R<br>2SC5242-O | 1   | 2202843 |  |
| Q6055 or          | TR        | 2SC5242-O<br>2SC5242-R |     | 2202842 |  |
| Q6056             | TR        |                        | (1) | 2202843 |  |
| -                 |           | 2SC5242-O<br>2SC5242-R | _   | 2202843 |  |
| Q6056 or          | TR        |                        | (1) |         |  |
| Q6060             | TR        | 2SA1962-O              | 1   | 2202833 |  |
| Q6060 or          | TR        | 2SA1962-R              | (1) | 2202832 |  |
| Q6061             | TR        | 2SA1962-O              | 1   | 2202833 |  |
| Q6061 or          | TR        | 2SA1962-R              | (1) | 2202832 |  |
| Q6062             | TR        | 2SA1962-O              | 1   | 2202833 |  |
| Q6062 or          | TR        | 2SA1962-R              | (1) | 2202832 |  |
| Q6063             | TR        | 2SA1962-O              | 1   | 2202833 |  |
| Q6063 or          | TR        | 2SA1962-R              | (1) | 2202832 |  |
| Q6064             | TR        | 2SA1962-O              | 1   | 2202833 |  |
| Q6064 or          | TR        | 2SA1962-R              | (1) | 2202832 |  |
| Q6065             | TR        | 2SA1962-O              | 1   | 2202833 |  |
| Q6065 or          | TR        | 2SA1962-R              | (1) | 2202832 |  |
| Q6066             | TR        | 2SA1962-O              | 1   | 2202833 |  |
| Q6066 or          | TR        | 2SA1962-R              | (1) | 2202832 |  |
| Q6080             | TR        | 2SC5242-O              | 1   | 2202843 |  |
| Q6080 or          | TR        | 2SC5242-R              | (1) | 2202842 |  |
| Q6080A            | ISO SHEET | ISO SHEET(SR805_4CH)   | 2   | 223048  |  |
| Q6081             | TR        | 2SC5242-O              | 1   | 2202843 |  |
| Q6081 or          | TR        | 2SC5242-R              | (1) | 2202842 |  |
| Q6082             | TR        | 2SC5242-O              | 1   | 2202843 |  |
| Q6082 or          | TR        | 2SC5242-R              | (1) | 2202842 |  |
| Q6083             | TR        | 2SC5242-O              | 1   | 2202843 |  |
| Q6083 or          | TR        | 2SC5242-R              | (1) | 2202842 |  |
| Q6084             | TR        | 2SC5242-O              | 1   | 2202843 |  |
| Q6084 or          | TR        | 2SC5242-R              | (1) | 2202842 |  |
| Q6085             | TR        | 2SC5242-O              | 1   | 2202843 |  |
| Q6085 or          | TR        | 2SC5242-R              | (1) | 2202842 |  |
| Q6086             | TR        | 2SC5242-O              | 1   | 2202843 |  |
| Q6086 or          | TR        | 2SC5242-R              | (1) | 2202842 |  |
| Q6090             | TR        | 2SA1962-O              | 1   | 2202833 |  |
| Q6090 or          | TR        | 2SA1962-R              | (1) | 2202832 |  |
| Q6091             | TR        | 2SA1962-O              | 1   | 2202833 |  |
| Q6091 or          | TR        | 2SA1962-R              | (1) | 2202832 |  |
|                   |           |                        |     |         |  |

| Q6092    | TR   | 2SA1962-O     | 1   | 2202833     |   |
|----------|--|---------------|-----|-------------|---|
| Q6092 or | TR   | 2SA1962-R     | (1) | 2202832     |   |
| Q6093    | TR   | 2SA1962-O     | 1   | 2202833     | ***************************************       |
| Q6093 or | TR   | 2SA1962-R     | (1) | 2202832     |   |
| Q6094    | TR   | 2SA1962-O     | 1   | 2202833     |   |
| Q6094 or | TR   | 2SA1962-R     | (1) | 2202832     |   |
| Q6095    | TR   | 2SA1962-O     | 1   | 2202833     |   |
| Q6095 or | TR   | 2SA1962-R     | (1) | 2202832     |   |
| Q6096    | TR   | 2SA1962-O     | 1   | 2202833     |   |
| Q6096 or | TR   | 2SA1962-R     | (1) | 2202832     |   |
| _        | 6050 - 6060, Q6051 - 6061, Q6052 - 6062, Q<br>6080 - 6090, Q6081 - 6091, Q6082 - 6092, Q |               |     |             |   |
| T902     | P TRANS  | NPT-1554D     | 1   | 2301898     | <dc, dd,="" dt=""></dc,>                      |
| T902     | P TRANS  | NPT-1554M     | 1   | 2301899     | <mp, mt,="" na906=""></mp,>                   |
| T903     | P TRANS  | NPT-1555D     | 1   | 2301902A    | <dc, dd,="" dt=""></dc,>                      |
| T903     | P TRANS  | NPT-1555M     | 1   | 2301903     | <mp, mt,="" na906=""></mp,>                   |
| T904     | P TRANS  | NPT-1556D     | 1   | 2301906     | <dc, dd,="" dt=""></dc,>                      |
| T904     | P TRANS  | NPT-1556M     | 1   | 2301907     | <mp, mt,="" na906=""></mp,>                   |
| U01      | AMPLIFIER PC board ass'y   | NAAF-9039-1L  | 1   | 1B170539-1L |   |
| U02      | POWER SUPPLY PC board ass'y  | NAPS-9040-1L  | 1   | 1B170540-1L |   |
| U03      | POWER SUPPLY PC board ass'y  | NAPS-9041-1L  | 1   | 1B170541-1L |   |
| U04      | THERMAL SENSOR PC board ass'y  | NAETC-9042-1L | 1   | 1B170542-1L |   |
| U05      | THERMAL SENSOR PC board ass'y  | NAETC-9043-1L | 1   | 1B170543-1L |   |
| U06      | AMPLIFIER PC board ass'y   | NAASP-9050-1E | 1   | 1B170550-1E | <dc, dd,="" dt,="" mp,="" mt<="" td=""></dc,> |
|          |  | NAASP-9050-1Q | 1   | 1B170550-1Q | <na906></na906>                               |
| U07      | PHONO PC board ass'y   | NAASP-9051-1E | 1   | 1B170551-1E | <dc, dd,="" dt,="" mp,="" mt<="" td=""></dc,> |
|          |  | NAASP-9051-1Q | 1   | 1B170551-1Q | <na906></na906>                               |
|          |  |               |     |             |   |

| T903 | P TRANS                       | NPT-1555M     | 1 | 2301903     | <mp, mt,="" na906=""></mp,>            |
|------|-------------------------------|---------------|---|-------------|--|
| T904 | P TRANS                       | NPT-1556D     | 1 | 2301906     | <dc, dd,="" dt=""></dc,>               |
| T904 | P TRANS                       | NPT-1556M     | 1 | 2301907     | <mp, mt,="" na906=""></mp,>            |
| U01  | AMPLIFIER PC board ass'y      | NAAF-9039-1L  | 1 | 1B170539-1L |  |
| U02  | POWER SUPPLY PC board ass'y   | NAPS-9040-1L  | 1 | 1B170540-1L |  |
| U03  | POWER SUPPLY PC board ass'y   | NAPS-9041-1L  | 1 | 1B170541-1L |  |
| U04  | THERMAL SENSOR PC board ass'y | NAETC-9042-1L | 1 | 1B170542-1L |  |
| U05  | THERMAL SENSOR PC board ass'y | NAETC-9043-1L | 1 | 1B170543-1L |  |
| U06  | AMPLIFIER PC board ass'y      | NAASP-9050-1E | 1 | 1B170550-1E | <dc, dd,="" dt,="" mp,="" mt=""></dc,> |
|      |                               | NAASP-9050-1Q | 1 | 1B170550-1Q | <na906></na906>                        |
| U07  | PHONO PC board ass'y          | NAASP-9051-1E | 1 | 1B170551-1E | <dc, dd,="" dt,="" mp,="" mt=""></dc,> |
|      |                               | NAASP-9051-1Q | 1 | 1B170551-1Q | <na906></na906>                        |
| U08  | VIDEO PC board ass'y          | NAVD-9052-1E  | 1 | 1B170552-1E | <dc, dd,="" dt,="" mp,="" mt=""></dc,> |
|      |                               | NAVD-9052-1Q  | 1 | 1B170552-1Q | <na906></na906>                        |
| U09  | CONNECTOR PC board ass'y      | NAETC-9053-1E | 1 | 1B170553-1E | <dc, dd,="" dt,="" mp,="" mt=""></dc,> |
|      |                               | NAETC-9053-1Q | 1 | 1B170553-1Q | <na906></na906>                        |
| U10  | CONNECTOR PC board ass'y      | NAETC-9054-1E | 1 | 1B170554-1E | <dc, dd,="" dt,="" mp,="" mt=""></dc,> |
|      |                               | NAETC-9054-1Q | 1 | 1B170554-1Q | <na906></na906>                        |
| U11  | SP TERMINAL PC board ass'y    | NATRM-9055-1K | 1 | 1B170555-1K | <dc, dd=""></dc,>                      |
|      |                               | NATRM-9055-1U | 1 | 1B170555-1U | <dt></dt>                              |
|      |                               | NATRM-9055-1M | 1 | 1B170555-1M | <mp, mt=""></mp,>                      |
|      |                               | NATRM-9055-1Y | 1 | 1B170555-1Y | <na906></na906>                        |
| U12  | SP TERMINAL PC board ass'y    | NAETC-9056-1K | 1 | 1B170556-1K | <dc, dd=""></dc,>                      |
|      |                               | NAETC-9056-1U | 1 | 1B170556-1U | <dt></dt>                              |
|      |                               | NAETC-9056-1M | 1 | 1B170556-1M | <mp, mt=""></mp,>                      |
|      |                               | NAETC-9056-1Y | 1 | 1B170556-1Y | <na906></na906>                        |
| U13  | POWER SUPPLY PC board ass'y   | NAASP-9057-1K | 1 | 1B170557-1K | <dc, dd=""></dc,>                      |
|      |                               | NAASP-9057-1U | 1 | 1B170557-1U | <dt></dt>                              |
|      |                               | NAASP-9057-1M | 1 | 1B170557-1M | <mp, mt=""></mp,>                      |
|      |                               | NAASP-9057-1Y | 1 | 1B170557-1Y | <na906></na906>                        |
| U14  | INLET PC board ass'y          | NAASP-9058-1K | 1 | 1B170558-1K | <dc, dd=""></dc,>                      |

|              |                               | NAASP-9058-1U                | 1 | 1B170558-1U                | <dt></dt>                             |
|--------------|-------------------------------|------------------------------|---|----------------------------|---------------------------------------|
|              |                               | NAASP-9058-1M                | 1 | 1B170558-1M                | <mp, mt=""></mp,>                     |
|              |                               | NAASP-9058-1Y                | 1 | 1B170558-1Y                | <na906></na906>                       |
| J15          | THERMAL SENSOR PC board ass'y | NAPS-9059-1K                 | 1 | 1B170559-1K                | <dc, dd=""></dc,>                     |
|              | •                             | NAPS-9059-1U                 | 1 | 1B170559-1U                | <dt></dt>                             |
|              |                               | NAPS-9059-1M                 | 1 | 1B170559-1M                | <mp, mt=""></mp,>                     |
|              |                               | NAPS-9059-1Y                 | 1 | 1B170559-1Y                | <na906></na906>                       |
| J <b>16</b>  | POWER AMP PC board ass'y      | NAAMP-9061-1E                | 1 | 1B170561-1E                |                                       |
| J17          | POWER AMP PC board ass'y      | NAAMP-9062-1E                | 1 | 1B170562-1E                |                                       |
| J18          | POWER AMP PC board ass'y      | NACLA-9063-1E                | 1 | 1B170563-1E                |                                       |
| J19          | POWER AMP PC board ass'y      | NACLA-9064-1E                | 1 | 1B170564-1E                |                                       |
| J20          | POWER AMP PC board ass'y      | NACLA-9065-1E                | 1 | 1B170564-1E                |                                       |
| J21          | POWER AMP PC board ass'y      | NACLA-9066-1E                | 1 | 1B170563-1E                |                                       |
| J22          | POWER AMP PC board ass'y      | NACLA-9067-1E                | 1 | 1B170564-1E                |                                       |
| J23          | POWER AMP PC board ass'y      | NACLA-9068-1E                | 1 | 1B170563-1E                |                                       |
| J24          | POWER AMP PC board ass'y      | NACLA-9069-1E                | 1 | 1B170564-1E                |                                       |
| 125          | DSP PC board ass'y            | NADSP-9072-1B                | 1 | 1B170572-1B                |                                       |
| J <b>2</b> 7 | DAC PC board ass'y            | NADG-9074-10                 | 1 | 1B170574-1Q                | <dc, dd=""></dc,>                     |
| 141          | DACT C board ass y            | NADG-9074-1Q<br>NADG-9074-1R | 1 | 1B170574-1Q<br>1B170574-1R | <mp, dt="" mt,=""></mp,>              |
|              |                               | NADG-9074-1K<br>NADG-9074-1Z | 1 | 1B170574-1Z                | <na906></na906>                       |
| 128          | MICROPROCESSOR PC board ass'y |                              | 1 | 1B170575-1Q                | <na900><br/><dc, dd=""></dc,></na900> |
| 128          | MICROPROCESSOR PC board ass y | NAAR-9075-1Q                 | 1 | 1B170575-1Q<br>1B170575-1R |                                       |
|              |                               | NAAR-9075-1R                 |   | 1B170575-1Z                | <mp, dt="" mt,=""></mp,>              |
| 120          | VALDO1 1 1                    | NAAR-9075-1Z                 | 1 |                            | <na906></na906>                       |
| J30          | XM PC board ass'y             | NARF-9077-1Q                 | 1 | 1B170577-1Q                | <dc, dd=""></dc,>                     |
| J31          | HOLDER PC board ass'y         | NAETC-9078-1Q                | 1 | 1B170578-1Q                | <dc, dd=""></dc,>                     |
|              |                               | NAETC-9078-1R                | 1 | 1B170578-1R                | <mp, dt="" mt,=""></mp,>              |
| 100          | AND VIEW DOLL                 | NAETC-9078-1Z                | 1 | 1B170578-1Z                | <na906></na906>                       |
| J32          | AMPLIFIER PC board ass'y      | NAASP-9080-1Q                | 1 | 1B170580-1Q                | <dc, dd=""></dc,>                     |
|              |                               | NAASP-9080-1R                | 1 | 1B170580-1R                | <mp, dt="" mt,=""></mp,>              |
|              |                               | NAASP-9080-1Z                |   | 1B170580-1Z                | <na906></na906>                       |
| J26          | AMPLIFIER PC board ass'y      | NAETC-9073-1Q                | 1 | 1B170573-1Q                | <dc, dd=""></dc,>                     |
|              |                               | NAETC-9073-1R                | 1 | 1B170573-1R                | <mp, dt="" mt,=""></mp,>              |
|              |                               | NAETC-9073-1Z                | 1 | 1B170573-1Z                | <na906></na906>                       |
| J <b>33</b>  | DISPLAY PC board ass'y        | NADIS-9085-1C                | 1 | 1B170585-1C                | <dc, dd=""></dc,>                     |
|              |                               | NADIS-9085-1R                | 1 | 1B170585-1R                | <mp, dt,="" mt,="" na906=""></mp,>    |
| J34          | DISPLAY PC board ass'y        | NADIS-9086-1C                | 1 | 1B170586-1C                | <dc, dd=""></dc,>                     |
|              |                               | NADIS-9086-1R                | 1 | 1B170586-1R                | <mp, dt,="" mt,="" na906=""></mp,>    |
| J35          | SWITCH PC board ass'y         | NASW-9087-1R                 | 1 | 1B170587-1R                | <mp, dt,="" mt,="" na906=""></mp,>    |
| J36          | HEADPHONE PC board ass'y      | NAETC-9088-1C                | 1 | 1B170588-1C                | <dc, dd=""></dc,>                     |
|              |                               | NAETC-9088-1R                | 1 | 1B170588-1R                | <mp, dt,="" mt,="" na906=""></mp,>    |
| J37          | POWER SUPPLY PC board ass'y   | NAPS-9089-1C                 | 1 | 1B170589-1C                | <dc, dd=""></dc,>                     |
|              |                               | NAPS-9089-1R                 | 1 | 1B170589-1R                | <mp, dt,="" mt,="" na906=""></mp,>    |
| J38          | FRONT OPT PC board ass'y      | NAETC-9090-1C                | 1 | 1B170590-1C                | <dc, dd=""></dc,>                     |
|              |                               | NAETC-9090-1R                | 1 | 1B170590-1R                | <mp, dt,="" mt,="" na906=""></mp,>    |
| J <b>3</b> 9 | VOLUME PC board ass'y         | NAETC-9091-1C                | 1 | 1B170591-1C                | <dc, dd=""></dc,>                     |
|              |                               | NAETC-9091-1R                | 1 | 1B170591-1R                | <mp, dt,="" mt,="" na906=""></mp,>    |
| J40          | HOLDER PC board ass'y         | NAETC-9092-1C                | 1 |                            | NSP                                   |
|              |                               | NAETC-9092-1R                | 1 |                            | NSP                                   |
|              |                               |                              |   |                            |                                       |

| U41  | HOLDER PC board ass'y   | NAETC-9093-1C | 1 |                    | NSP                      |
|------|-------------------------|---------------|---|--------------------|--------------------------|
|      |                         | NAETC-9093-1R | 1 |                    | NSP                      |
| U42  | HDMI PC board ass'y     | NAHDM-9114-1A | 1 | 1B170514-1A_0290A2 |                          |
| U43  | HD RADIO PC board ass'y | NARF-9118-1A  | 1 | 1B170518-1A        | <dc, dd=""></dc,>        |
| U44  | LAN PC board ass'y      | NALAN-9121-1A | 1 | 1B170521-1A        |                          |
| U017 | TUNER UNIT              | FAE485-E11EU  | 1 | 240154             | <mp, dt="" mt,=""></mp,> |

TX-NR906/NA906

## PC BOARD PARTS LIST

| U01 | AMPLIFIER PC BOARD (NAAF-9039-1L)      |
|-----|--|
| U02 | POWER SUPPLY PC BOARD (NAPS-9040-1L)   |
| U03 | POWER SUPPLY PC BOARD (NAPS-9041-1L)   |
| U04 | THERMAL SENSOR PC BORD (NAETC-9042-1L) |
| U05 | THERMAL SENSOR PC BORD (NAETC-9043-1L) |

| REF. NO. | PART NAME | DESCRIPTION        | Q'TY | PART NO. (SN) | REMARKS |
|----------|-----------|--------------------|------|---------------|---------|
| Q6000    | TR        | 2SC1740S-S         | 1    | 2213285T      |         |
| Q6001    | TR        | 2SC1740S-S         | 1    | 2213285T      |         |
| Q6002    | TR        | 2SC1740S-S         | 1    | 2213285T      |         |
| Q6003    | TR        | 2SC1740S-S         | 1    | 2213285T      |         |
| Q6004    | TR        | 2SC1740S-S         | 1    | 2213285T      |         |
| Q6005    | TR        | 2SC1740S-S         | 1    | 2213285T      |         |
| Q6006    | TR        | 2SC1740S-S         | 1    | 2213285T      |         |
| Q6226    | TR        | 2SB1240-R          | 1    | 2213794T      |         |
| Q6380    | IC        | LM61CIZ            | 1    | 22242212      |         |
| Q6380A   | RETAINER  | (PTH)              | 1    | 27141884-1    |         |
| Q6381    | IC        | LM61CIZ            | 1    | 22242212      |         |
| Q6381A   | RETAINER  | (PTH)              | 1    | 27141884-1    |         |
| Q6550    | TR        | 2SC1815-GR         | 1    | 2211255T      |         |
| Q6551    | TR        | 2SA950-O           | 1    | 2211503T      |         |
| Q6551 or | TR        | 2SA950-Y           | (1)  | 2211504T      |         |
| Q6560    | TR        | 2SC1815-GR         | 1    | 2211255T      |         |
| Q6561    | TR        | 2SA950-O           | 1    | 2211503T      |         |
| Q6561 or | TR        | 2SA950-Y           | (1)  | 2211504T      |         |
| Q6601    | TR        | KTC3199-GR         | 1    | 2215864T      |         |
| Q6601 or | TR        | 2SC1740S-R         | (1)  | 2213284T      |         |
| Q6601 or | TR        | 2SC1740S-S         | (1)  | 2213285T      |         |
| Q6611    | TR        | KTC3199-GR         | 1    | 2215864T      |         |
| Q6611 or | TR        | 2SC1740S-R         | (1)  | 2213284T      |         |
| Q6611 or | TR        | 2SC1740S-S         | (1)  | 2213285T      |         |
| Q6701    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q6701 or | TR        | 2SC2240-GR         | (1)  | 2211405T      |         |
| Q6701 or | TR        | KTC3200-BL         | (1)  | 2215896T      |         |
| Q6702    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q6702 or | TR        | 2SC2240-GR         | (1)  | 2211405T      |         |
| Q6702 or | TR        | KTC3200-BL         | (1)  | 2215896T      |         |

| Q6703    | TR       | 2SA970-BL(TPE2_F)   | 1   | 2211396T   |
|----------|----------|---------------------|-----|------------|
| Q6703 or | TR       | 2SA970-GR           | (1) | 2211395T   |
| Q6703 or | TR       | KTA1268-BL          | (1) | 2215886T   |
| D6221    | DIODE    | 1SS133              | 1   | 223163T    |
| D6222    | DIODE    | 1SS133              | 1   | 223163T    |
| D6601    | DIODE    | LN25XB60            | 1   | 22380345   |
| D6602    | DIODE    | 1SS133              | 1   | 223163T    |
| D6611    | DIODE    | LN25XB60            | 1   | 22380345   |
| D6612    | DIODE    | 1SS133              | 1   | 223163T    |
| D6621    | DIODE    | LN25XB60            | 1   | 22380345   |
| D6701    | DIODE    | 1SS133              | 1   | 223163T    |
| D6702    | DIODE    | 1SS133              | 1   | 223163T    |
| D6703    | ZENER D  | MTZJ3.3B            | 1   | 224470332T |
| D6704    | ZENER D  | MTZJ3.3B            | 1   | 224470332T |
| C6030    | TF C     | ECO-V100-473J       | 1   | 374734734T |
| C6031    | TF C     | ECO-V100-473J       | 1   | 374734734T |
| C6032    | TF C     | ECQ-V100-473J       | 1   | 374734734T |
| C6033    | TF C     | ECQ-V100-473J       | 1   | 374734734T |
| C6034    | TF C     | ECQ-V100-473J       | 1   | 374734734T |
| C6035    | TF C     | ECO-V100-473J       | 1   | 374734734T |
| C6036    | TF C     | ECQ-V100-473J       | 1   | 374734734T |
| C6222    | UTSP C   | CE04W25V-220M(UTSP) | 1   | 397552217T |
| C6601    | TF C     | ECQ-B50V-102J       | 1   | 374721024T |
| C6602    | PLA C    | ECQE250V-334J       | 1   | 3700083S   |
| C6611    | TF C     | ECQ-B50V-102J       | 1   | 374721024T |
| C6612    | TF C     | ECQ-V100-334J       | 1   | 374733344T |
| C6622    | TF C     | ECQ-V100-334J       | 1   | 374733344T |
| C6701    | UTSP C   | CE04W10V-220M(UTSP) | 1   | 397532217T |
| C6703    | TF C     | ECQ-B50V-223J       | 1   | 374722234T |
| C6704    | UTSP C   | CE04W50V-1M(UTSP)   | 1   | 397580107T |
| C6706    | UTSP C   | CE04W50V-10M(UTSP)  | 1   | 397581007T |
| C6901    | ELECT C  | CE69W75V-18000M     | 1   | 3504437A   |
| C6902    | ELECT C  | CE69W75V-18000M     | 1   | 3504437A   |
| R6130    | METAL R  | RNU1WCJ-8.2         | 1   | 453630824T |
| R6131    | METAL R  | RNU1WCJ-8.2         | 1   | 453630824T |
| R6132    | METAL R  | RNU1WCJ-8.2         | 1   | 453630824T |
| R6133    | METAL R  | RNU1WCJ-8.2         | 1   | 453630824T |
| R6134    | METAL R  | RNU1WCJ-8.2         | 1   | 453630824T |
| R6135    | METAL R  | RNU1WCJ-8.2         | 1   | 453630824T |
| R6136    | METAL R  | RNU1WCJ-8.2         | 1   | 453630824T |
| R6222    | METAL R  | RNU1WCJ-1           | 1   | 453630104T |
| R6223    | CARBON R | R16J-5.6K           | 1   | 417345624T |
| R6550    | CARBON R | R16J-4.7K           | 1   | 417344724T |
| R6551    | CARBON R | R16J-330            | 1   | 417343314T |
| R6552    | CARBON R | R16J-1.8K           | 1   | 417341824T |
| R6553    | CARBON R | R16J-1.2K           | 1   | 417341224T |
| R6554    | CARBON R | R16J-22K            | 1   | 417342234T |
| R6560    | CARBON R | R16J-4.7K           | 1   | 417344724T |
|          |          |                     |     |            |

| R6561   | CARBON R    | R16J-330           | 1 | 417343314T   |   |
|---------|-------------|--------------------|---|--------------|---|
| R6562   | CARBON R    | R16J-1.8K          | 1 | 417341824T   |   |
| R6563   | CARBON R    | R16J-1.2K          | 1 | 417341224T   |   |
| R6564   | CARBON R    | R16J-22K           | 1 | 417342234T   |   |
| R6601   | CARBON R    | R16J-1K            | 1 | 417341024T   |   |
| R6602   | CARBON R    | R16J-4.7K          | 1 | 417344724T   |   |
| R6603   | METAL R     | RNU1/2WCJ-2.2      | 1 | 453530224T   |   |
| R6611   | CARBON R    | R16J-1K            | 1 | 417341024T   |   |
| R6612   | CARBON R    | R16J-4.7K          | 1 | 417344724T   |   |
| R6613   | METAL R     | RNU1/2WCJ-2.2      | 1 | 453530224T   |   |
| R6701   | CARBON R    | R16J-22K           | 1 | 417342234T   |   |
| R6702   | CARBON R    | R16J-10K           | 1 | 417341034T   |   |
| R6704   | CARBON R    | R16J-33K           | 1 | 417343334T   |   |
| R6706   | CARBON R    | R16J-22K           | 1 | 417342234T   |   |
| R6708   | CARBON R    | R16J-33K           | 1 | 417343334T   |   |
| R6709   | CARBON R    | R16J-5.6K          | 1 | 417345624T   |   |
| R6710   | CARBON R    | R16J-15K           | 1 | 417341534T   |   |
| F6601A  | FUSE HOLDER | SN5051             | 1 | 250113       | 1 |
| F6601B  | FUSE HOLDER | SN5051<br>SN5051   | 1 | 250113       | ! |
| F6602A  | FUSE HOLDER | SN5051             | 1 | 250113       | ! |
| F6602B  | FUSE HOLDER | SN5051<br>SN5051   | 1 | 250113       | ! |
| F6603A  | FUSE HOLDER | SN5051             | 1 | 250113       | ! |
| F6603B  | FUSE HOLDER | SN5051<br>SN5051   | 1 | 250113       | ! |
| F6604A  |             | SN5051<br>SN5051   | 1 | 250113       | • |
| F6604B  | FUSE HOLDER | SN5051<br>SN5051   | 1 | 250113       | ! |
|         | FUSE HOLDER |                    |   |              | ! |
| JL6041A | WIRE HOL    | NSCT-3P874         | 1 | 25051087     |   |
| JL6402A | WIRE TRAP   | NPLG-3P586         | 1 | 25055624     |   |
| JL6402B | WIRE HOL    | NSCT-3P874         | 1 | 25051087     |   |
| JL6403A | WIRE TRAP   | NPLG-3P586         |   | 25055624     |   |
| JL6403B | WIRE HOL    | NSCT-3P874         | 1 | 25051087     |   |
| JL6602A | WIRE HOL    | NSCT-4P875         | 1 | 25051088     |   |
| JL6602B | WIRE TRAP   | NPLG-4P587         | 1 | 25055625     |   |
| JL6900A | WIRE HOL    | NSCT-3P894         | 1 | 25051107     |   |
| P4100   | SOCKET      | 9210B-1-08Z140-PT1 | 1 | 25053243     |   |
| P4101   | SOCKET      | 9210B-1-08Z140-PT1 | 1 | 25053243     |   |
| P5000A  | SOCKET AS   | NSAS-26P1612       | 1 | 2009991020UL |   |
| P5001A  | CRIMP AS    | CRIMP SR805_1      | 1 | 20799169UL   |   |
| P5010B  | PLUG        | NPLG-3P0958        | 1 | 25056008     |   |
| P5011B  | PLUG        | NPLG-3P0958        | 1 | 25056008     |   |
| P5012B  | PLUG        | NPLG-3P0958        | 1 | 25056008     |   |
| P5013B  | PLUG        | NPLG-3P0958        | 1 | 25056008     |   |
| P5014B  | PLUG        | NPLG-3P0958        | 1 | 25056008     |   |
| P5015B  | PLUG        | NPLG-3P0958        | 1 | 25056008     |   |
| P5016B  | PLUG        | NPLG-3P0958        | 1 | 25056008     |   |
| P5020B  | TRM         | NTM-1P232(M1700)   | 1 | 25060301     |   |
| P5021B  | TRM         | NTM-1P232(M1700)   | 1 | 25060301     |   |
| P5022B  | TRM         | NTM-1P232(M1700)   | 1 | 25060301     |   |
| P5023B  | TRM         | NTM-1P232(M1700)   | 1 | 25060301     |   |

| P5024B | TRM       | NTM-1P232(M1700)    | 1 | 25060301      |
|--------|-----------|---------------------|---|---------------|
| P5025B | TRM       | NTM-1P232(M1700)    | 1 | 25060301      |
| P5026B | TRM       | NTM-1P232(M1700)    | 1 | 25060301      |
| P6010B | PLUG      | NPLG-4P0959         | 1 | 25056009      |
| P6011B | PLUG      | NPLG-4P0959         | 1 | 25056009      |
| P6012B | PLUG      | NPLG-4P0959         | 1 | 25056009      |
| P6013B | PLUG      | NPLG-4P0959         | 1 | 25056009      |
| P6014B | PLUG      | NPLG-4P0959         | 1 | 25056009      |
| P6015B | PLUG      | NPLG-4P0959         | 1 | 25056009      |
| P6016B | PLUG      | NPLG-4P0959         | 1 | 25056009      |
| P6140  | SOCKET AS | NSAS-7P1659         | 1 | 2009991063AUL |
| P6202  | HOLDER    | HOLDER(CLAMP)       | 1 | 27190540-1    |
| P6203  | HOLDER    | HOLDER(CLAMP)       | 1 | 27190540-1    |
| P6340  | SOCKET AS | NSAS-8P1660         | 1 | 2009991064AUL |
| P6400  | RETAINER  | (BUS-3)             | 1 | 27142058A     |
| P6401  | RETAINER  | (BUS-4)             | 1 | 27142059A     |
| P6500  | PLUG      | NPLG-7P163          | 1 | 25055179      |
| P6550  | PLUG      | NPLG-2P83           | 1 | 25055099      |
| P6560  | PLUG      | NPLG-2P83           | 1 | 25055099      |
| P6601  | SOCKET AS | NSAS-7P1673         | 1 | 2009991071AUL |
| P6601A | PLUG      | NPLG-7P163          | 1 | 25055179      |
| P6602  | TRM       | NTM-1P243(M1699)    | 1 | 25060312      |
| P6602B | RETAINER  | MET37-0002          | 1 | 27142009T     |
| P6603  | TRM       | NTM-1P243(M1699)    | 1 | 25060312      |
| P6603B | RETAINER  | MET37-0002          | 1 | 27142009T     |
| P7210A | SOCKET AS | NSAS-18P1674        | 1 | 2009991072UL  |
| RL6601 | RELAY     | NRL-1P16A-DC12V-189 | 1 | 25065694      |
| RL6602 | RELAY     | NRL-1P16A-DC12V-189 | 1 | 25065694      |
| RL6611 | RELAY     | NRL-1P16A-DC12V-189 | 1 | 25065694      |
| RL6612 | RELAY     | NRL-1P16A-DC12V-189 | 1 | 25065694      |
|        |           |                     |   |               |

| U06 | AMPLIFIER PC BOARD (NAASP-9050-1E/1Q) |
|-----|---------------------------------------|
| U07 | PHONO PC BOARD (NAASP-9051-1E/1Q)     |
| U08 | VIDEO PC BOARD (NAVD-9052-1E/1Q)      |
| U09 | CONNECTOR PC BOARD (NAETC-9053-1E/1Q) |
| U10 | CONNECTOR PC BOARD (NAETC-9054-1E/1Q) |

| REF. NO. | PART NAME | DESCRIPTION | Q'TY | PART NO. (SN) | REMARKS |
|----------|-----------|-------------|------|---------------|---------|
| Q2001    | TR        | RN1444-A    | 1    | 2216031R2     |         |
| Q2001 or | TR        | RN1444-B    | (1)  | 2216032R2     |         |
| Q2002    | TR        | RN1444-A    | 1    | 2216031R2     |         |
| Q2002 or | TR        | RN1444-B    | (1)  | 2216032R2     |         |
| Q2003    | TR        | RN1444-A    | 1    | 2216031R2     |         |
| Q2003 or | TR        | RN1444-B    | (1)  | 2216032R2     |         |
| Q2004    | TR        | RN1444-A    | 1    | 2216031R2     |         |
| Q2004 or | TR        | RN1444-B    | (1)  | 2216032R2     |         |
| Q2005    | TR        | RN1444-A    | 1    | 2216031R2     |         |
| Q2005 or | TR        | RN1444-B    | (1)  | 2216032R2     |         |

| 02006             | IC        | TOTALICADEL | E/FL E   | 222740515D2            |  |
|-------------------|-----------|-------------|----------|------------------------|--|
| Q2006             | IC        | TC74HC4051A |          | 222740515R2            |  |
| Q2007             | IC        | TC74HC4051A |          | 222740515R2            |  |
| Q2008             | IC        | TC74HC4051A |          | 222740515R2            |  |
| Q2009             | IC        | TC74HC4051A |          | 222740515R2            |  |
| Q2010             | IC        | TC74HC4051A |          | 222740515R2            |  |
| Q2011             | IC        | TC74HC4051A |          | 222740515R2            |  |
| Q2012             | IC        | NJM2587V    | 1        | 22242380R2             |  |
| Q2013             | IC        | NJM2587V    | 1        | 22242380R2             |  |
| Q2014             | IC        | MM1512      | 1        | 22241849R2             |  |
| Q2015             | TR        | RN1441      | 1        | 2215410R2              |  |
| Q2016             | TR        | RN1441      | 1        | 2215410R2              |  |
| Q2017             | TR        | RN1444-A    | 1        | 2216031R2              |  |
| Q2017 or          | TR        | RN1444-B    | (1)      | 2216032R2              |  |
| Q2018             | TR        | RN1444-A    | 1        | 2216031R2              |  |
| Q2018 or          | TR        | RN1444-B    | (1)      | 2216032R2              |  |
| Q2019             | TR        | RN1444-A    | 1        | 2216031R2              |  |
| Q2019 or          | TR        | RN1444-B    | (1)      | 2216032R2              |  |
| Q2020             | TR        | RN1444-A    | 1        | 2216031R2              |  |
| Q2020 or          | TR        | RN1444-B    | (1)      | 2216032R2              |  |
| Q2023             | TR        | KRA102S     | 1        | 2216220R2              |  |
| Q2023 or          | TR        | RN2402      | (1)      | 2214530R2              |  |
| Q2024             | TR        | KTA1504-GR  | 1        | 2216185R2              |  |
| Q2024<br>Q2024 or | TR        | 2SA1162-GR  | (1)      | 2214375R2              |  |
| Q2025             | TR        | KRA102S     | 1        | 2216220R2              |  |
| Q2025 or          | TR        | RN2402      | (1)      | 2214530R2              |  |
| Q2026             | TR        | KTA1504-GR  | 1        | 2214336R2<br>2216185R2 |  |
| Q2026<br>Q2026 or | TR        | 2SA1162-GR  | (1)      | 2214375R2              |  |
|                   |           |             |          |                        |  |
| Q2027             | IC        | NJU7312AM   | <u> </u> | 22242210R2             |  |
| Q2201             | IC        | NJW1321FP1  |          | 22242381R3             |  |
| Q2204             | TR        | 2SK3019     | 1        | 2216520R2              |  |
| Q2205             | TR        | 2SK3019     | 1        | 2216520R2              |  |
| Q2206             | IC        | NJM2586AM   | 1        | 22242420R2             |  |
| Q2501             | IC        | SI8008TM    | 1        | 22242323R2             |  |
| Q2502             | TR        | 2SC2712-GR  | 1        | 2213145R2              |  |
| Q2503             | TR        | RN1402      | 1        | 2214470R2              |  |
| Q2504             | IC        | NJM2388F09  | 1        | 22242383               |  |
| Q2504A            | SCREW     | 3P+10FN(3BC |          | 82143010GR             |  |
| Q2504B            | HEAT SINK | RAD-196     | 1        | 27160545               |  |
| Q2505             | IC        | NJM2386ADL  | 3-05 1   | 22242382R2             |  |
| Q2506             | TR        | RN2402      | 1        | 2214530R2              |  |
| Q2507             | TR        | 2SD1468S-R  | 1        | 2215024T               |  |
| Q2509             | IC        | 7905FA(NJM7 | 905FA) 1 | 222790054JRC           |  |
| Q2509A            | SCREW     | 3P+10FN(3BC | 1        | 82143010GR             |  |
| Q2511             | TR        | 2SC2712-GR  | 1        | 2213145R2              |  |
| Q2512             | TR        | 2SA1162-GR  | 1        | 2214375R2              |  |
| Q2605             | TR        | 2SB1240-R   | 1        | 2213794T               |  |
| Q2605 or          | TR        | 2SB1240-Q   | (1)      | 2213793T               |  |
| Q2605 or          | TR        | 2SB1240-P   | (1)      | 2213792T               |  |
| ~2005 OI          |           | 2501240-1   | (1)      |                        |  |

| Q2606    | TR | KRC102S            | 1   | 2216190R2  |                 |
|----------|----|--------------------|-----|------------|-----------------|
| Q2606 or | TR | RN1402             | (1) | 2214470R2  |                 |
| Q4001    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4002    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4011    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4012    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4013    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4014    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4015    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4016    | IC | NE5532APSR         | 1   | 22242283R2 | <na906></na906> |
| Q4017    | TR | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |                 |
| Q4018    | TR | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |                 |
| Q4019    | TR | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |                 |
| Q4020    | TR | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |                 |
| Q4021    | TR | 2SC2712-GR         | 1   | 2213145R2  |                 |
| Q4022    | TR | 2SC2712-GR         | 1   | 2213145R2  |                 |
| Q4023    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4025    | TR | RN1441             | 1   | 2215410R2  | <nr906></nr906> |
| Q4026    | TR | RN1441             | 1   | 2215410R2  | <nr906></nr906> |
| Q4029    | IC | TC94A46CFG         | 1   | 22242414R3 |                 |
| Q4029 or | IC | TC94A46FG          | (1) | 22242103R3 |                 |
| Q4030    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4031    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4032    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4040    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4041    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4042    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4043    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4205    | TR | RN1441             | 1   | 2215410R2  |                 |
| Q4206    | TR | RN1441             | 1   | 2215410R2  |                 |
| Q4207    | TR | RN1441             | 1   | 2215410R2  |                 |
| Q4208    | TR | RN1441             | 1   | 2215410R2  |                 |
| Q4209    | TR | RN1441             | 1   | 2215410R2  |                 |
| Q4210    | TR | RN1441             | 1   | 2215410R2  |                 |
| Q4211    | TR | RN1441             | 1   | 2215410R2  |                 |
| Q4212    | TR | RN1441             | 1   | 2215410R2  |                 |
| Q4301    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4302    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4303    | IC | NE5532APSR         | 1   | 22242283R2 |                 |
| Q4304    | IC | NJU7312AM          | 1   | 22242210R2 |                 |
| Q4305    | IC | NJU7313AM          | 1   | 22242211R2 |                 |
| Q4306    | IC | NJU7311AM          | 1   | 22242209R2 |                 |
| Q4401    | TR | 2SA950-Y           | 1   | 2211504T   |                 |
| Q4402    | TR | 2SC2120-Y          | 1   | 2211164T   |                 |
| Q4403    | TR | 2SC2712-GR         | 1   | 2213145R2  |                 |
| Q4404    | TR | 2SA1162-GR         | 1   | 2214375R2  |                 |
| Q4405    | IC | CS3318-CQZR        | 1   | 22242404R2 |                 |
| Q4406    | IC | NE5532APSR         | 1   | 22242283R2 |                 |

| O4407             | TR                 | 2SC2712-GR                      | 1   | 2213145R2              |  |
|-------------------|--------------------|---------------------------------|-----|------------------------|--|
| Q4407<br>Q4408    | TR                 | 2SC2/12-GR                      | 1   | 2213145R2<br>2213145R2 |  |
| Q4501             | TR                 | 2SC2712-GR<br>2SC2235-Y(TPE6_F) | 1   | 2213143K2<br>2211654T  |  |
| Q4501<br>Q4502    | TR                 | 2SC2235-Y(TPE6_F)               | 1   | 2211654T               |  |
| Q4503             | TR                 | 2SA965-Y(TPE6_F)                | 1   | 2211644T               |  |
| Q4504             | TR                 | 2SA965-Y(TPE6_F)                | 1   | 2211644T               |  |
| Q4505             | IC                 | NE5532APSR                      | 1   | 22242283R2             |  |
| Q4506             | TR                 | 2SC2712-GR                      | 1   | 2213145R2              |  |
| Q4500<br>Q4610    | TR                 | RN1441                          | 1   | 2215410R2              |  |
| Q4610<br>Q4611    | TR                 | RN1441                          | 1   | 2215410R2<br>2215410R2 |  |
| Q4611<br>Q4612    | TR                 | RN1441                          | 1   | 2215410R2              |  |
| Q4612<br>Q4613    | TR                 | RN1441                          | 1   | 2215410R2<br>2215410R2 |  |
| Q4614             | TR                 | RN1441                          | 1   | 2215410R2<br>2215410R2 |  |
| Q4615             | TR                 | RN1441                          | 1   | 2215410R2              |  |
| Q4616             | TR                 | RN1441                          | 1   | 2215410R2<br>2215410R2 |  |
| Q4617             | TR                 | RN1441                          | 1   | 2215410R2<br>2215410R2 |  |
| Q4620             | TR                 | RN1441                          | 1   | 2215410R2<br>2215410R2 |  |
| Q4621             | TR                 | RN1441<br>RN1441                | 1   | 2215410R2<br>2215410R2 |  |
| Q4621<br>Q4622    | TR                 | RN1441<br>RN1441                | 1   | 2215410R2<br>2215410R2 |  |
| Q4623             | TR                 | RN1441                          | 1   | 2215410R2<br>2215410R2 |  |
| Q4624             | TR                 | RN1441                          | 1   | 2215410R2<br>2215410R2 |  |
| Q4625             | TR                 | RN1441                          | 1   | 2215410R2              |  |
| Q4626             | TR                 | RN1441                          | 1   | 2215410R2<br>2215410R2 |  |
| Q4627             | TR                 | RN1441                          | 1   | 2215410R2<br>2215410R2 |  |
| D2003             | C-DIODE            | 1SS352                          | 1   | 223234R2               |  |
| D2003<br>D2003 or | C-DIODE            | 1SS352<br>1SS355                | (1) | 223269R2               |  |
| D2003 or          | C-DIODE            | MA2J1110GL                      | (1) | 223302R2               |  |
| D2004             | C-DIODE            | 1SS352                          | 1   | 223234R2               |  |
| D2004<br>D2004 or | C-DIODE<br>C-DIODE | 1SS352<br>1SS355                | (1) | 223269R2               |  |
| D2004 or          | C-DIODE            | MA2J1110GL                      | (1) | 223302R2               |  |
| D2005             | C-DIODE            | 1SS352                          | 1   | 223234R2               |  |
| D2005 or          | C-DIODE            | 188355                          | (1) | 223269R2               |  |
| D2005 or          | C-DIODE            | MA2J1110GL                      | (1) | 223302R2               |  |
| D2006             | C-DIODE            | 188352                          | 1   | 223234R2               |  |
| D2006 or          | C-DIODE            | 188355                          | (1) | 223269R2               |  |
| D2006 or          | C-DIODE            | MA2J1110GL                      | (1) | 223302R2               |  |
| D2203             | ZENER D            | UDZ3.3B                         | 1   | 224490330R2            |  |
| D2203 or          | ZENER D            | UDZS3.3B                        | (1) | 224550330R2            |  |
| D2501             | C-DIODE            | CRS09(TE85L_Q)                  | 1   | 223274R2               |  |
| D2502             | C-DIODE<br>C-DIODE | 1SS352                          | 1   | 223234R2               |  |
| D2502<br>D2502 or | C-DIODE<br>C-DIODE | 1SS352<br>1SS355                | (1) | 223269R2               |  |
| D2502 or          | C-DIODE<br>C-DIODE | MA2J1110GL                      | (1) | 223302R2               |  |
| D2503             | C-DIODE            | 1SS352                          | 1   | 223234R2               |  |
| D2503<br>D2503 or | C-DIODE            | 1SS352<br>1SS355                | (1) | 223269R2               |  |
| D2503 or          | C-DIODE            | MA2J1110GL                      | (1) | 223302R2               |  |
| D2504             | C-DIODE            | 1SS352                          | 1   | 223234R2               |  |
| D2504 or          | C-DIODE            | 1SS352<br>1SS355                | (1) | 223269R2               |  |
| D2504 or          | C-DIODE<br>C-DIODE | MA2J1110GL                      | (1) | 223302R2               |  |
| D230+ 01          | C-DIODE            | MAZJITIVOL                      | (1) | LLJJULIKL              |  |

| D2508 or         C-DIODE         MA2J1110GL         (1)         223302R2           D2509         C-DIODE         1SS352         1         223234R2           D2509 or         C-DIODE         1SS355         (1)         223269R2           D2509 or         C-DIODE         MA2J1110GL         (1)         223302R2           D2510         DIODE         DIOXB60H         1         22380337F           D2511         DIODE         RLIN4003         1         2380260T           D2512         C-DIODE         1SS352         1         23234R2           D2512 or         C-DIODE         1SS355         (1)         223269R2           D2512 or         C-DIODE         MA2J1110GL         (1)         223302R2           D2513 or         C-DIODE         1SS352         1         223234R2           D2513 or         C-DIODE         1SS355         (1)         223269R2           D2513 or         C-DIODE         MA2J1110GL         (1)         223302R2           D2605 or         C-DIODE         1SS352         1         22324R2           D2605 or         C-DIODE         MA2J1110GL         (1)         223302R2           D2606 or         C-DIODE         MA2  |          | ~ |            |     |           |
|--|----------|---|------------|-----|-----------|
| D2505 of   |          |   |            |     |           |
| DESOR   ZENER D  |          |   |            |     |           |
| DESPON   C. DIODE   ISS352   1   22326872   1   22326872   1   22326872   1   22326872   1   22326872   1   23326872   1   2 |          |   |            |     |           |
| D2508   C-DIODE  |          |   |            |     |           |
| D2508 ar   |          |   |            |     |           |
| D2598 or C-DIODE   | D2508    | C-DIODE                                 | 1SS352     | 1   | 223234R2  |
| D2509   C.DIODE  | D2508 or |   |            | (1) |           |
| D2599 or   C-DIODE   |          | C-DIODE                                 | MA2J1110GL | (1) |           |
| D2590  | D2509    | C-DIODE                                 | 1SS352     | 1   | 223234R2  |
| D2510   DIODE   DIOXB60H   1   22380337F   D2511   DIODE   RLIN4003   1   22380260T   D2512   C-DIODE   ISS352   1   22324R2   D2512 or   C-DIODE   ISS355   (1)   223269R2   D2513   C-DIODE   ISS355   (1)   223302R2   D2513 or   C-DIODE   ISS352   1   22334R2   D2513 or   C-DIODE   ISS355   (1)   223269R2   D2605   C-DIODE   ISS355   (1)   223269R2   D2605 or   C-DIODE   ISS355   (1)   223269R2   D2606 or   C-DIODE   ISS355   (1)   223302R2   D2607   DIODE   RLIN4003   1   223302R2   D2608 or   C-DIODE   RLIN4003   1   223302R2   D2609   DIODE   RLIN4003   1   224505660R2   D4001   ZENER D   UDZS5.6B   1   224505660R2   D4002   ZENER D   UDZS5.6B   1   224505060R2   D4001   ZENER D   UDZS5.6B   1   224505060R2   D4401   ZENER D   UDZS5.6B   1   224505060R2   D4403   ZENER D   UDZS3.3B   1   224505060R2   D4404   ZENER D   UDZS3.3B   1   224505060R2   D4405   ZENER D   UDZS3.3B   1   224505060R2   D4404   C-DIODE   ISS352   1   22324R2   D4404   C-DIODE   ISS352   1   22324R2   D4404   C-DIODE   ISS352   1   22324R2   D4405   C-DIODE   ISS352   1   22324R2   D4406   C-DIODE   ISS352   1   22324R2   D4407   C-DIODE   ISS352   1   22324R2   D4408   C-DIODE   ISS352   1   22324R2   D4409   C-DIODE   ISS352   1   22324R2   D4501   C-DIODE   ISS352   1   22324R2   D4502   C-DIODE   ISS355   (1)   22326R2   D4503   C-DIODE   ISS355   (1)   22326R2   D450 | D2509 or | C-DIODE                                 | 1SS355     | (1) | 223269R2  |
| D2511   D10DE  | D2509 or | C-DIODE                                 | MA2J1110GL | (1) | 223302R2  |
| D2512  | D2510    | DIODE                                   | D10XB60H   | 1   | 22380337F |
| D2512 or   C-DIODE   ISS355   (1)   223269R2   D2512 or   C-DIODE   MAZII110GL   (1)   223302R2   D2513 or   C-DIODE   ISS352   1   22324R2   D2513 or   C-DIODE   ISS355   (1)   223302R2   D2513 or   C-DIODE   MAZII110GL   (1)   223302R2   D2513 or   C-DIODE   MAZII110GL   (1)   223302R2   D2605 or   C-DIODE   ISS355   (1)   223269R2   D2605 or   C-DIODE   ISS355   (1)   223269R2   D2605 or   C-DIODE   ISS355   (1)   223302R2   D2605 or   C-DIODE   ISS355   (1)   223302R2   D2606 or   C-DIODE   ISS355   (1)   223302R2   D2606 or   C-DIODE   ISS355   (1)   223269R2   D2606 or   C-DIODE   MAZII110GL   (1)   223302R2   D2606 or   C-DIODE   MAZII10GL   (1)   223506002   D2606 or   C-DIODE   MAZII10GL   (1)   223506002   D2606 or   C-DIODE   MAZII10GL   (2)  | D2511    | DIODE                                   | RL1N4003   | 1   | 22380260T |
| D2512 or   | D2512    | C-DIODE                                 | 1SS352     | 1   | 223234R2  |
| D2513  | D2512 or | C-DIODE                                 | 1SS355     | (1) | 223269R2  |
| D2513 or   C-DIODE   ISS355   (1)   223269R2   D2513 or   C-DIODE   MA211110GL   (1)   223302R2   D2605 or   C-DIODE   ISS352   1   22324R2   D2605 or   C-DIODE   ISS355   (1)   223269R2   D2606 or   C-DIODE   ISS355   (1)   223302R2   D2606 or   C-DIODE   MA211110GL   (1)   223302R2   D2606 or   C-DIODE   MA211110GL   (1)   223302R2   D2607   DIODE   RLIN4003   1   2235056072   D4001   ZENER D   UDZ55.6B   1   224550560R2   D44002   ZENER D   UDZ55.6B   1   224550560R2   D4401   ZENER D   UDZ59.1B   1   224550910R2   D4403   ZENER D   UDZ59.1B   1   224550910R2   D4403   ZENER D   UDZ53.3B   1   224550330R2   D4403   ZENER D   UDZ53.3B   1   224550330R2   D4404   C-DIODE   ISS355   1   223269R2   D4404 or   C-DIODE   ISS355   1   223269R2   D4404 or   C-DIODE   ISS355   1   2232302R2   D4405 or   C-DIODE   ISS355   1   2232302R2   D4501 or   C-DIODE   ISS355   1   2232302R2   D4502 or   C-DIODE   ISS355   1   2232302R2   D4503 or   C-DIODE   ISS355   1   2232302R2    | D2512 or | C-DIODE                                 | MA2J1110GL | (1) | 223302R2  |
| D2513 or   C-DIODE   MA2JILIOGL   C   223302R2   | D2513    | C-DIODE                                 | 1SS352     | 1   | 223234R2  |
| D2605   C-DIODE   ISS352   I   223234R2  | D2513 or | C-DIODE                                 | 1SS355     | (1) | 223269R2  |
| D2605   C-DIODE   ISS352   I   223234R2  | D2513 or | C-DIODE                                 | MA2J1110GL | (1) | 223302R2  |
| D2605 or         C-DIODE         MA2J1110GL         (1)         223302R2           D2606         C-DIODE         1SS352         1         223234R2           D2606 or         C-DIODE         1SS355         (1)         223269R2           D2606 or         C-DIODE         MA2J1110GL         (1)         223302R2           D2607         DIODE         RL1N4003         1         22380260T           D4001         ZENER D         UDZS5.6B         1         2245505600R2           D4401         ZENER D         UDZS9.1B         1         224550910R2           D4401         ZENER D         UDZS9.1B         1         224550910R2           D4402         ZENER D         UDZS3.3B         1         224550910R2           D4403         ZENER D         UDZS3.3B         1         224550930R2           D44040         ZENER D         UDZS3.3B         1         224550930R2           D4404 or         C-DIODE         1SS352         1         223234R2           D4404 or         C-DIODE         1SS355         (1)         223254R2           D4405 or         C-DIODE         1SS355         (1)         223234R2           D4405 or         C-DIODE <td< td=""><td>D2605</td><td>C-DIODE</td><td>1SS352</td><td>1</td><td>223234R2</td></td<>  | D2605    | C-DIODE                                 | 1SS352     | 1   | 223234R2  |
| D2606         C-DIODE         ISS352         1         223234R2           D2606 or         C-DIODE         ISS355         (1)         223302R2           D2606 or         C-DIODE         MA2J1110GL         (1)         223302R2           D2607         DIODE         RLIN4003         1         22380260T           D4001         ZENER D         UDZS5.6B         1         224550560R2           D4002         ZENER D         UDZS5.6B         1         224550560R2           D4401         ZENER D         UDZS9.1B         1         224550910R2           D4401         ZENER D         UDZS9.1B         1         224550910R2           D4403         ZENER D         UDZ3.3B         1         22459010R2           D4403         ZENER D         UDZ3.3B         1         22459030R2           D4404         C-DIODE         ISS352         1         223234R2           D4404 or         C-DIODE         ISS355         (1)         223260R2           D4404 or         C-DIODE         ISS352         1         223234R2           D4405 or         C-DIODE         ISS355         (1)         223302R2           D4405 or         C-DIODE         ISS352  | D2605 or | C-DIODE                                 | 1SS355     | (1) | 223269R2  |
| D2606 or C-DIODE         ISS355         (1)         223269R2           D2606 or C-DIODE         MAZIII10GL         (1)         223302R2           D2607         DIODE         RLIN4003         1         22380260T           D4001         ZENER D         UDZS5.6B         1         224550560R2           D4401         ZENER D         UDZS5.6B         1         22455050R2           D4401         ZENER D         UDZS9.1B         1         224550910R2           D4402         ZENER D         UDZS3.BB         1         224550910R2           D4403         ZENER D         UDZ3.3B         1         22450330R2           D4403         ZENER D         UDZS3.3B         (1)         22450330R2           D44040         C-DIODE         ISS352         1         223234R2           D4404 or         C-DIODE         ISS355         (1)         223306R2           D4405 or         C-DIODE         ISS352         1         22324R2           D4405 or         C-DIODE         ISS352         (1)         223269R2           D4501 or         C-DIODE         ISS352         (1)         223269R2           D4501 or         C-DIODE         MAZIII10GL         (1)   | D2605 or | C-DIODE                                 | MA2J1110GL | (1) | 223302R2  |
| D2606 or         C-DIODE         MA2II110GL         (1)         223302R2           D2607         DIODE         RLIN4003         1         22380260T           D4001         ZENER D         UDZS5.6B         1         224550560R2           D4002         ZENER D         UDZS5.6B         1         224550910R2           D4401         ZENER D         UDZS9.1B         1         224550910R2           D4402         ZENER D         UDZS9.1B         1         224550910R2           D4403         ZENER D         UDZS3.3B         1         224490330R2           D4403 or         ZENER D         UDZS3.3B         1         22455030R2           D4404 c-C-DIODE         ISS352         1         223234R2           D4404 or         C-DIODE         ISS355         (1)         223269R2           D4404 or         C-DIODE         ISS355         (1)         223234R2           D4405 or         C-DIODE         ISS355         (1)         223234R2           D4405 or         C-DIODE         MA2II110GL         (1)         223324R2           D4501 or         C-DIODE         ISS352         1         223234R2           D4501 or         C-DIODE         MA2II110GL <td>D2606</td> <td>C-DIODE</td> <td>1SS352</td> <td>1</td> <td>223234R2</td>  | D2606    | C-DIODE                                 | 1SS352     | 1   | 223234R2  |
| D2606 or         C-DIODE         MA2II110GL         (1)         223302R2           D2607         DIODE         RLIN4003         1         22380260T           D4001         ZENER D         UDZS5.6B         1         224550560R2           D4002         ZENER D         UDZS5.6B         1         224550910R2           D4401         ZENER D         UDZS9.1B         1         224550910R2           D4402         ZENER D         UDZS9.1B         1         224550910R2           D4403         ZENER D         UDZS3.3B         1         224490330R2           D4403 or         ZENER D         UDZS3.3B         1         22455030R2           D4404 c-C-DIODE         ISS352         1         223234R2           D4404 or         C-DIODE         ISS355         (1)         223269R2           D4404 or         C-DIODE         ISS355         (1)         223234R2           D4405 or         C-DIODE         ISS355         (1)         223234R2           D4405 or         C-DIODE         MA2II110GL         (1)         223324R2           D4501 or         C-DIODE         ISS352         1         223234R2           D4501 or         C-DIODE         MA2II110GL <td></td> <td></td> <td></td> <td>(1)</td> <td></td>  |          |   |            | (1) |           |
| D4001         ZENER D         UDZSS.6B         1         224550560R2           D4002         ZENER D         UDZSS.6B         1         224550560R2           D4401         ZENER D         UDZS9.1B         1         224550910R2           D4402         ZENER D         UDZS9.1B         1         224550910R2           D4403         ZENER D         UDZS3.3B         1         224490330R2           D4403 or         ZENER D         UDZS3.3B         (1)         22455030R2           D4404         C-DIODE         1SS352         1         23234R2           D4404 or         C-DIODE         1SS355         (1)         223302R2           D4405 or         C-DIODE         1SS352         1         223234R2           D4405 or         C-DIODE         1SS355         (1)         22326R2           D4405 or         C-DIODE         MA2J1110GL         (1)         22330R2           D4501 or         C-DIODE         1SS352         1         22324R2           D4501 or         C-DIODE         1SS355         (1)         22324R2           D4501 or         C-DIODE         1SS355         (1)         22330R2           D4502 or         C-DIODE         1SS35  | D2606 or | C-DIODE                                 | MA2J1110GL | (1) | 223302R2  |
| D4001         ZENER D         UDZSS.6B         1         224550560R2           D4002         ZENER D         UDZSS.6B         1         224550560R2           D4401         ZENER D         UDZS9.1B         1         224550910R2           D4402         ZENER D         UDZS9.1B         1         224550910R2           D4403         ZENER D         UDZS3.3B         1         224490330R2           D4403 or         ZENER D         UDZS3.3B         (1)         22455030R2           D4404         C-DIODE         1SS352         1         23234R2           D4404 or         C-DIODE         1SS355         (1)         223302R2           D4405 or         C-DIODE         1SS352         1         223234R2           D4405 or         C-DIODE         1SS355         (1)         22326R2           D4405 or         C-DIODE         MA2J1110GL         (1)         22330R2           D4501 or         C-DIODE         1SS352         1         22324R2           D4501 or         C-DIODE         1SS355         (1)         22324R2           D4501 or         C-DIODE         1SS355         (1)         22330R2           D4502 or         C-DIODE         1SS35  | D2607    | DIODE                                   | RL1N4003   | 1   | 22380260T |
| D4002         ZENER D         UDZS5.6B         1         224550560R2           D4401         ZENER D         UDZS9.1B         1         224550910R2           D4402         ZENER D         UDZS9.1B         1         224550910R2           D4403         ZENER D         UDZ3.3B         1         224490330R2           D4403 or         ZENER D         UDZS3.3B         (1)         224550330R2           D4404 C-DIODE         1SS352         1         23334R2           D4404 or         C-DIODE         1SS355         (1)         223269R2           D4404 or         C-DIODE         MA2J1110GL         (1)         223324R2           D4405 or         C-DIODE         1SS352         1         23334R2           D4405 or         C-DIODE         1SS355         (1)         22369R2           D4405 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4501 or         C-DIODE         1SS352         1         23324R2           D4501 or         C-DIODE         MA2J1110GL         (1)         223234R2           D4502 or         C-DIODE         1SS352         1         233234R2           D4502 or         C-DIODE         MA2J1110GL <td></td> <td></td> <td></td> <td>1</td> <td></td>  |          |   |            | 1   |           |
| D4401         ZENER D         UDZS9.1B         1         224550910R2           D4402         ZENER D         UDZS9.1B         1         224550910R2           D4403         ZENER D         UDZ3.3B         1         224490330R2           D4403 or         ZENER D         UDZS3.3B         (1)         224550330R2           D4404         C-DIODE         1SS352         1         223234R2           D4404 or         C-DIODE         1SS355         (1)         223269R2           D4404 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4405 or         C-DIODE         1SS352         1         223234R2           D4405 or         C-DIODE         1SS355         (1)         223269R2           D4405 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4501 or         C-DIODE         1SS352         1         223234R2           D4501 or         C-DIODE         1SS355         (1)         223236PR2           D4502 or         C-DIODE         1SS352         1         223234R2           D4502 or         C-DIODE         1SS355         (1)         223234R2           D4503 or         C-DIODE   |          |   |            | 1   |           |
| D4402         ZENER D         UDZS9.1B         1         224550910R2           D4403         ZENER D         UDZ3.3B         1         224490330R2           D4403 or         ZENER D         UDZS3.3B         (1)         224550330R2           D4404         C-DIODE         ISS352         1         223234R2           D4404 or         C-DIODE         ISS355         (1)         22326PR2           D4405 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4405 or         C-DIODE         ISS352         1         22324R2           D4405 or         C-DIODE         MA2J1110GL         (1)         223202R2           D4501 or         C-DIODE         ISS352         1         223234R2           D4501 or         C-DIODE         ISS352         1         223234R2           D4501 or         C-DIODE         ISS355         (1)         22326PR2           D4501 or         C-DIODE         ISS352         1         22324R2           D4502 or         C-DIODE         ISS355         (1)         22324R2           D4502 or         C-DIODE         ISS355         (1)         223234R2           D4503 or         C-DIODE         MA  |          |   |            | 1   |           |
| D4403         ZENER D         UDZ3.3B         1         224490330R2           D4403 or         ZENER D         UDZS3.3B         (1)         224550330R2           D4404         C-DIODE         1SS352         1         223234R2           D4404 or         C-DIODE         1SS355         (1)         223269R2           D4405         C-DIODE         MA2J1110GL         (1)         223234R2           D4405 or         C-DIODE         1SS352         1         233234R2           D4405 or         C-DIODE         MA2J1110GL         (1)         22320PR2           D4405 or         C-DIODE         MA2J1110GL         (1)         223234R2           D4501         C-DIODE         1SS352         1         223234R2           D4501 or         C-DIODE         1SS355         (1)         223269R2           D4501 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4502 or         C-DIODE         1SS352         1         223234R2           D4502 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4503 or         C-DIODE         MA2J1110GL         (1)         223234R2           D4503 or         C-DIODE  |          |   |            | 1   |           |
| D4403 or         ZENER D         UDZS3.3B         (1)         224550330R2           D4404         C-DIODE         1SS352         1         223234R2           D4404 or         C-DIODE         1SS355         (1)         223269R2           D4404 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4405         C-DIODE         1SS352         1         223234R2           D4405 or         C-DIODE         1SS355         (1)         223269R2           D4405 or         C-DIODE         MA2J1110GL         (1)         223234R2           D4501 or         C-DIODE         1SS352         1         223234R2           D4501 or         C-DIODE         1SS355         (1)         223269R2           D4501 or         C-DIODE         MA2J1110GL         (1)         223234R2           D4501 or         C-DIODE         1SS352         1         223234R2           D4502 or         C-DIODE         1SS355         (1)         223269R2           D4502 or         C-DIODE         MA2J1110GL         (1)         223234R2           D4503 or         C-DIODE         1SS352         1         223234R2           D4503 or         C-DIODE  |          |   |            |     |           |
| D4404       C-DIODE       1SS352       1       223234R2         D4404 or       C-DIODE       1SS355       (1)       223269R2         D4404 or       C-DIODE       MA2J1110GL       (1)       223302R2         D4405       C-DIODE       1SS352       1       223234R2         D4405 or       C-DIODE       1SS355       (1)       223269R2         D4405 or       C-DIODE       MA2J1110GL       (1)       223302R2         D4501       C-DIODE       1SS352       1       223234R2         D4501 or       C-DIODE       1SS355       (1)       223269R2         D4501 or       C-DIODE       MA2J1110GL       (1)       223302R2         D4502 or       C-DIODE       1SS352       1       223234R2         D4502 or       C-DIODE       1SS355       (1)       223234R2         D4502 or       C-DIODE       MA2J1110GL       (1)       223302R2         D4503 or       C-DIODE       1SS352       1       223234R2         D4503 or       C-DIODE       1SS355       (1)       223234R2         D4503 or       C-DIODE       1SS355       (1)       223224R2         D4503 or       C-DIODE       1SS355  |          |   |            |     |           |
| D4404 or       C-DIODE       1SS355       (1)       223269R2         D4404 or       C-DIODE       MA2J1110GL       (1)       223302R2         D4405       C-DIODE       1SS352       1       223234R2         D4405 or       C-DIODE       1SS355       (1)       223269R2         D4405 or       C-DIODE       MA2J1110GL       (1)       223302R2         D4501       C-DIODE       1SS352       1       223234R2         D4501 or       C-DIODE       1SS355       (1)       223269R2         D4501 or       C-DIODE       MA2J1110GL       (1)       223302R2         D4502       C-DIODE       1SS352       1       223234R2         D4502 or       C-DIODE       1SS355       (1)       223269R2         D4502 or       C-DIODE       MA2J1110GL       (1)       223302R2         D4503 or       C-DIODE       1SS352       1       223234R2         D4503 or       C-DIODE       1SS355       (1)       223234R2         D4503 or       C-DIODE       1SS355       (1)       2232269R2         D4503 or       C-DIODE       1SS355       (1)       223230R2   |          |   |            |     |           |
| D4404 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4405         C-DIODE         1SS352         1         223234R2           D4405 or         C-DIODE         1SS355         (1)         223269R2           D4405 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4501         C-DIODE         1SS352         1         223234R2           D4501 or         C-DIODE         1SS355         (1)         223269R2           D4501 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4502         C-DIODE         1SS352         1         223234R2           D4502 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4502 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4503 or         C-DIODE         1SS352         1         223234R2           D4503 or         C-DIODE         1SS355         (1)         223224R2           D4503 or         C-DIODE         1SS355         (1)         223224R2           D4503 or         C-DIODE         MA2J1110GL         (1)         223302R2   |          |   |            |     |           |
| D4405         C-DIODE         ISS352         1         223234R2           D4405 or         C-DIODE         ISS355         (1)         223269R2           D4405 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4501         C-DIODE         ISS352         1         223234R2           D4501 or         C-DIODE         ISS355         (1)         223269R2           D4501 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4502         C-DIODE         ISS352         1         223234R2           D4502 or         C-DIODE         ISS355         (1)         223269R2           D4502 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4503 or         C-DIODE         ISS352         1         223234R2           D4503 or         C-DIODE         ISS355         (1)         223234R2           D4503 or         C-DIODE         ISS355         (1)         223224R2           D4503 or         C-DIODE         MA2J1110GL         (1)         223302R2  |          |   |            |     |           |
| D4405 or         C-DIODE         ISS355         (1)         223269R2           D4405 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4501         C-DIODE         ISS352         1         223234R2           D4501 or         C-DIODE         ISS355         (1)         223269R2           D4501 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4502         C-DIODE         ISS352         1         223234R2           D4502 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4502 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4503 or         C-DIODE         ISS352         1         223234R2           D4503 or         C-DIODE         ISS355         (1)         223234R2           D4503 or         C-DIODE         ISS355         (1)         223224R2           D4503 or         C-DIODE         MA2J1110GL         (1)         223302R2  |          |   |            |     |           |
| D4405 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4501         C-DIODE         1SS352         1         223234R2           D4501 or         C-DIODE         1SS355         (1)         223269R2           D4501 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4502         C-DIODE         1SS352         1         223234R2           D4502 or         C-DIODE         1SS355         (1)         223269R2           D4502 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4503         C-DIODE         1SS352         1         223234R2           D4503 or         C-DIODE         1SS355         (1)         223269R2           D4503 or         C-DIODE         1SS355         (1)         223269R2           D4503 or         C-DIODE         MA2J1110GL         (1)         22302R2   |          |   |            |     |           |
| D4501         C-DIODE         1SS352         1         223234R2           D4501 or         C-DIODE         1SS355         (1)         223269R2           D4501 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4502         C-DIODE         1SS352         1         223234R2           D4502 or         C-DIODE         1SS355         (1)         223269R2           D4502 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4503         C-DIODE         1SS352         1         223234R2           D4503 or         C-DIODE         1SS355         (1)         223269R2           D4503 or         C-DIODE         MA2J1110GL         (1)         223302R2  |          |   |            |     |           |
| D4501 or         C-DIODE         1SS355         (1)         223269R2           D4501 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4502         C-DIODE         1SS352         1         223234R2           D4502 or         C-DIODE         1SS355         (1)         223269R2           D4502 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4503         C-DIODE         1SS352         1         223234R2           D4503 or         C-DIODE         1SS355         (1)         223269R2           D4503 or         C-DIODE         MA2J1110GL         (1)         223302R2  |          |   |            |     |           |
| D4501 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4502         C-DIODE         1SS352         1         223234R2           D4502 or         C-DIODE         1SS355         (1)         223269R2           D4502 or         C-DIODE         MA2J1110GL         (1)         223302R2           D4503         C-DIODE         1SS352         1         223234R2           D4503 or         C-DIODE         1SS355         (1)         223269R2           D4503 or         C-DIODE         MA2J1110GL         (1)         223302R2   |          |   |            |     |           |
| D4502       C-DIODE       1SS352       1       223234R2         D4502 or       C-DIODE       1SS355       (1)       223269R2         D4502 or       C-DIODE       MA2J1110GL       (1)       223302R2         D4503       C-DIODE       1SS352       1       223234R2         D4503 or       C-DIODE       1SS355       (1)       223269R2         D4503 or       C-DIODE       MA2J1110GL       (1)       223302R2  |          |   |            |     |           |
| D4502 or C-DIODE         1SS355         (1) 223269R2           D4502 or C-DIODE         MA2J1110GL         (1) 223302R2           D4503 C-DIODE         1SS352         1 223234R2           D4503 or C-DIODE         1SS355         (1) 223269R2           D4503 or C-DIODE         MA2J1110GL         (1) 223302R2  |          |   |            |     |           |
| D4502 or C-DIODE         MA2J1110GL         (1)         223302R2           D4503         C-DIODE         1SS352         1         223234R2           D4503 or C-DIODE         1SS355         (1)         223269R2           D4503 or C-DIODE         MA2J1110GL         (1)         223302R2   |          |   |            |     |           |
| D4503         C-DIODE         1SS352         1         223234R2           D4503 or         C-DIODE         1SS355         (1)         223269R2           D4503 or         C-DIODE         MA2J1110GL         (1)         223302R2  |          |   |            | ` ′ |           |
| D4503 or         C-DIODE         1SS355         (1)         223269R2           D4503 or         C-DIODE         MA2J1110GL         (1)         223302R2  |          |   |            |     |           |
| D4503 or C-DIODE MA2J1110GL (1) 223302R2   |          |   |            |     |           |
|  |          |   |            |     |           |
| D4504 C-DIODE 1SS352 1 223234R2  |          |   |            |     |           |
|  | D4504    | C-DIODE                                 | 188352     | 1   | 225254K2  |

| D4504 or | C-DIODE    | 1SS355             | (1) | 223269R2    |  |
|----------|------------|--------------------|-----|-------------|--|
| D4504 or | C-DIODE    | MA2J1110GL         | (1) | 223302R2    |  |
| D4505    | C-DIODE    | 1SS352             | 1   | 223234R2    |  |
| D4505 or | C-DIODE    | 1SS355             | (1) | 223269R2    |  |
| D4505 or | C-DIODE    | MA2J1110GL         | (1) | 223302R2    |  |
| D4506    | C-DIODE    | 1SS352             | 1   | 223234R2    |  |
| D4506 or | C-DIODE    | 1SS355             | (1) | 223269R2    |  |
| D4506 or | C-DIODE    | MA2J1110GL         | (1) | 223302R2    |  |
| D4507    | C-DIODE    | 1SS352             | 1   | 223234R2    |  |
| D4507 or | C-DIODE    | 1SS355             | (1) | 223269R2    |  |
| D4507 or | C-DIODE    | MA2J1110GL         | (1) | 223302R2    |  |
| D4508    | C-DIODE    | 1SS352             | 1   | 223234R2    |  |
| D4508 or | C-DIODE    | 1SS355             | (1) | 223269R2    |  |
| D4508 or | C-DIODE    | MA2J1110GL         | (1) | 223302R2    |  |
| D4509    | C-DIODE    | 1SS352             | 1   | 223234R2    |  |
| D4509 or | C-DIODE    | 1SS355             | (1) | 223269R2    |  |
| D4509 or | C-DIODE    | MA2J1110GL         | (1) | 223302R2    |  |
| L2501    | CHOKE COIL | BLM21PG221SN1      | 1   | 230949R2    |  |
| L2502    | CHOKE COIL | NCH-2541           | 1   | 231363K470A |  |
| L2603    | EMIFIL     | BK1608LM182-T      | 1   | 230958R1    |  |
| L2604    | EMIFIL     | BK1608LM182-T      | 1   | 230958R1    |  |
| C2001    | C-CERA C   | CK725F1E-104Z1     | 1   | 332161040R1 | the state of the s |
| C2002    | UTSP C     | CE04W50V-10M(UTSP) | 1   | 397581007T  |  |
| C2003    | UTSP C     | CE04W50V-10M(UTSP) | 1   | 397581007T  |  |
| C2004    | C-CERA C   | CK725F1E-104Z1     | 1   | 332161040R1 |  |
| C2005    | UTSP C     | CE04W50V-10M(UTSP) | 1   | 397581007T  |  |
| C2006    | UTSP C     | CE04W50V-10M(UTSP) | 1   | 397581007T  |  |
| C2007    | C-CERA C   | CK725B1H-102K1     | 1   | 332101025R1 |  |
| C2008    | C-CERA C   | CK725F1E-104Z1     | 1   | 332161040R1 |  |
| C2009    | UTSP C     | CE04W50V-10M(UTSP) | 1   | 397581007T  |  |
| C2010    | UTSP C     | CE04W50V-10M(UTSP) | 1   | 397581007T  |  |
| C2011    | C-CERA C   | CK725B1H-102K1     | 1   | 332101025R1 |  |
| C2012    | C-CERA C   | CK725F1E-104Z1     | 1   | 332161040R1 |  |
| C2013    | UTSP C     | CE04W50V-10M(UTSP) | 1   | 397581007T  |  |
| C2014    | UTSP C     | CE04W50V-10M(UTSP) | 1   | 397581007T  |  |
| C2015    | C-CERA C   | CK725B1H-102K1     | 1   | 332101025R1 |  |
| C2016    | C-CERA C   | CK725F1E-104Z1     | 1   | 332161040R1 |  |
| C2017    | UTSP C     | CE04W50V-10M(UTSP) | 1   | 397581007T  |  |
| C2018    | UTSP C     | CE04W50V-10M(UTSP) | 1   | 397581007T  |  |
| C2019    | C-CERA C   | CK725B1H-102K1     | 1   | 332101025R1 |  |
| C2020    | C-CERA C   | CK725B1H-102K1     | 1   | 332101025R1 |  |
| C2024    | C-CERA C   | CK725F1E-104Z1     | 1   | 332161040R1 |  |
| C2025    | VR C       | CE04W6.3V-470M(VR) | 1   | 394624717T  |  |
| C2026    | VR C       | CE04W6.3V-470M(VR) | 1   | 394624717T  |  |
| C2027    | C-CERA C   | CK725F1E-104Z1     | 1   | 332161040R1 |  |
| C2028    | C-CERA C   | CK725F1E-104Z1     | 1   | 332161040R1 |  |
| C2029    | C-CERA C   | CK725F1E-104Z1     | 1   | 332161040R1 |  |
| C2030    | C-CERA C   | CK725F1E-104Z1     | 1   | 332161040R1 |  |
|          |            |                    |     |             |  |

|       | G GER L G | GWG05FLF 10471     |   | 2221 (10 10 10 1 |
|-------|-----------|--------------------|---|------------------|
| C2031 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2032 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2033 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2034 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2035 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2036 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2037 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2038 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2043 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2044 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2045 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2046 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2047 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2048 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2049 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2050 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2051 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2052 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2053 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2054 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2055 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2056 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2057 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2058 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2061 | VR C      | CE04W6.3V-470M(VR) | 1 | 394624717T       |
| C2062 | VR C      | CE04W6.3V-470M(VR) | 1 | 394624717T       |
| C2063 | UTSP C    | CE04W50V-22M(UTSP) | 1 | 397582207T       |
| C2064 | VR C      | CE04W16V-100M(VR)  | 1 | 394641017T       |
| C2065 | UTSP C    | CE04W50V-1M(UTSP)  | 1 | 397580107T       |
| C2066 | C-CERA C  | CK725B1H-103K1     | 1 | 332101035R1      |
| C2067 | VR C      | CE04W6.3V-220M(VR) | 1 | 394622217T       |
| C2068 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2069 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2070 | VR C      | CE04W6.3V-470M(VR) | 1 | 394624717T       |
| C2071 | VR C      | CE04W6.3V-470M(VR) | 1 | 394624717T       |
| C2072 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2073 | VR C      | CE04W6.3V-470M(VR) | 1 | 394624717T       |
| C2074 | VR C      | CE04W6.3V-470M(VR) | 1 | 394624717T       |
| C2075 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2076 | VR C      | CE04W6.3V-470M(VR) | 1 | 394624717T       |
| C2077 | VR C      | CE04W6.3V-470M(VR) | 1 | 394624717T       |
| C2078 | VR C      | CE04W6.3V-470M(VR) | 1 | 394624717T       |
| C2082 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2083 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2084 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2085 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2086 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
| C2087 | C-CERA C  | CK725F1E-104Z1     | 1 | 332161040R1      |
|       |           |                    |   |                  |

| C2088          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
|----------------|----------|--------------------|------------|----------------------------|
| C2088          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1<br>332161040R1 |
| C2089          | UTSP C   | CE04W50V-10M(UTSP) | 1          | 397581007T                 |
| C2090          | UTSP C   | CE04W50V-10M(UTSP) | 1          | 397581007T                 |
| C2091          | C-CERA C | CK725F1E-104Z1     | <u>1</u> 1 | 332161040R1                |
| C2201          | UTSP C   | CE04W50V-1M(UTSP)  | 1          | 397580107T                 |
| C2201          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2202          | UTSP C   | CE04W50V-1M(UTSP)  | 1          | 397580107T                 |
| C2204          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2204          | UTSP C   | CE04W50V-1M(UTSP)  | 1          | 397580107T                 |
| C2206          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2207          | UTSP C   | CE04W50V-1M(UTSP)  | 1          | 397580107T                 |
| C2207          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
|                | UTSP C   |                    | 1          |                            |
| C2209<br>C2210 | C-CERA C | CE04W50V-1M(UTSP)  | 1          | 397580107T                 |
| C2210<br>C2211 | UTSP C   | CK725F1E-104Z1     | 1          | 332161040R1                |
|                |          | CE04W50V-1M(UTSP)  |            | 397580107T                 |
| C2212          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2214          | UTSP C   | CE04W50V-1M(UTSP)  | 1          | 397580107T                 |
| C2215          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2216          | UTSP C   | CE04W50V-1M(UTSP)  | 1          | 397580107T                 |
| C2217          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2218          | UTSP C   | CE04W50V-1M(UTSP)  | 1          | 397580107T                 |
| C2219          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2221          | C-CERA C | CK725B1H-102K1     | 1          | 332101025R1                |
| C2222          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2223          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2224          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2225          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2226          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2227          | UTSP C   | CE04W50V-1M(UTSP)  | 1          | 397580107T                 |
| C2228          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2229          | UTSP C   | CE04W50V-10M(UTSP) | 1          | 397581007T                 |
| C2230          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2231          | UTSP C   | CE04W50V-10M(UTSP) | 1          | 397581007T                 |
| C2232          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2233          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2234          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2235          | VR C     | CE04W16V-220M(VR)  | 1          | 394642217T                 |
| C2236          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2237          | UTSP C   | CE04W50V-10M(UTSP) | 1          | 397581007T                 |
| C2239          | UTSP C   | CE04W50V-10M(UTSP) | 1          | 397581007T                 |
| C2240          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2241          | UTSP C   | CE04W50V-10M(UTSP) | 1          | 397581007T                 |
| C2242          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2243          | UTSP C   | CE04W50V-10M(UTSP) | 1          | 397581007T                 |
| C2244          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2245          | C-CERA C | CK725F1E-104Z1     | 1          | 332161040R1                |
| C2246          | VR C     | CE04W6.3V-220M(VR) | 1          | 394622217T                 |
|                |          |                    |            |                            |

| C2248          | VR C     | CE04W6.3V-220M(VR)                      | 1  | 394622217T               |
|----------------|----------|---|----|--------------------------|
| C2249          | C-CERA C | CK725F1E-104Z1                          | 1  | 332161040R1              |
| C2250          | UTSP C   | CE04W50V-10M(UTSP)                      | 1  | 397581007T               |
| C2262          | UTSP C   | CE04W50V-10M(UTSP)                      | 1  | 397581007T               |
| C2263          | UTSP C   | CE04W50V-10M(UTSP)                      | 1  | 397581007T               |
| C2264          | UTSP C   | CE04W50V-10M(UTSP)                      | 1  | 397581007T               |
| C2265          | UTSP C   | CE04W50V-10M(UTSP)                      | 1  | 397581007T               |
| C2266          | C-CERA C | CK725F1E-104Z1                          | 1  | 332161040R1              |
| C2267          | UTSP C   | CE04W50V-10M(UTSP)                      | 1  | 397581007T               |
| C2501          | VRC      | CE04W30V-10M(UTSI)                      | 1  | 394644717T               |
| C2502          | C-CERA C | CK725B1H-223K1                          | 1  | 332102235R1              |
| C2503          | C-CERA C | CK725F1E-104Z1                          | 1  | 332161040R1              |
| C2504          | VR C     | CE04W16V-470M(VR)                       | 1  | 394644717T               |
| C2505          | TFC      | ECQ-V50V-104J                           | 1  | 374721044T               |
| C2507          | ELECT C  | CE04W16V-10000M(VZ)                     | 1  | 394541037S               |
| C2508          | VR C     | CE04W16V-10000M(VZ)  CE04W25V-2200M(VR) | 1  | 3945410373<br>394652227S |
| C2509          | UTSP C   | CE04W25V-2200M(VR) CE04W50V-1M(UTSP)    | 1  | 397580107T               |
| C2510          | VRC      |   | 1  |                          |
| C2510          | UTSP C   | CE04W50V 1M(UTGP)                       | 1  | 394641017T               |
| C2511          | VR C     | CE04W50V-1M(UTSP)                       | 1  | 397580107T<br>394641017T |
| C2512<br>C2513 | UTSP C   | CE04W50V 22M(UTSP)                      | 1  | 397582207T               |
|                |          | CE04W50V-22M(UTSP)                      |    |                          |
| C2514          | UTSP C   | CE04W50V-22M(UTSP)                      | 1  | 397582207T               |
| C2515          | UTSP C   | CE04W50V-1M(UTSP)                       | 1  | 397580107T               |
| C2516          | VR C     | CE04W16V-100M(VR)                       | 1  | 394641017T               |
| C2601          | C-CERA C | CK725B1H-102K1                          | 1  | 332101025R1              |
| C2602          | C-CERA C | CK725B1H-102K1                          | 1  | 332101025R1              |
| C2605          | C-CERA C | CC725CH1H-101J1                         | 1  | 342101014R1              |
| C2607          | C-CERA C | CC725CH1H-101J1                         | 1  | 342101014R1              |
| C4001          | TF C     | ECQ-B50V-221K                           | 1  | 374722215T               |
| C4002          | TFC      | ECQ-B50V-221K                           | 1  | 374722215T               |
| C4003          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4004          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4005          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4006          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4007          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4008          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4009          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4010          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4011          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4012          | C-CERA C | CC725CH1H-221J1                         | 11 | 342102214R1              |
| C4013          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4014          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4015          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4016          | C-CERA C | CC725CH1H-221J1                         | 1  | 342102214R1              |
| C4017          | TF C     | ECQ-B50V-221K                           | 1  | 374722215T               |
| C4018          | TF C     | ECQ-B50V-221K                           | 1  | 374722215T               |
| C4019          | UTSP C   | CE04W50V 47M(UTSP)                      | 1  | 397584707T               |
| C4020          | UTSP C   | CE04W50V 47M(UTSP)                      | 1  | 397584707T               |

| C4023          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707Т               |                 |
|----------------|---------------|---------------------------------------|---|--------------------------|-----------------|
| C4023          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4024          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4027          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4028          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4031          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4032          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4036          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4039          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4040          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4040          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4043          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4044<br>C4055 | TFC           | ECQ-B50V-221K                         | 1 | 374722215T               |                 |
|                | TFC           |                                       | 1 |                          |                 |
| C4056<br>C4057 | UTSP C        | ECQ-B50V-221K                         | 1 | 374722215T<br>397584707T |                 |
| C4057          | UTSP C        | CE04W50V 47M(UTSP) CE04W50V 47M(UTSP) | 1 |                          |                 |
|                |               | <u>```</u>                            |   | 397584707T               |                 |
| C4059          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4060          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4061          | UTSP C        | CE04W25V-220M(UTSP)                   | 1 | 397552217T               |                 |
| C4062          | UTSP C        | CE04W25V-220M(UTSP)                   | 1 | 397552217T               |                 |
| C4063          | TF C          | ECQ-B50V-682J                         | 1 | 374726824T               |                 |
| C4064          | TF C          | ECQ-B50V-682J                         | 1 | 374726824T               |                 |
| C4065          | TF C          | ECQ-B50V-182J                         | 1 | 374721824T               |                 |
| C4066          | TF C          | ECQ-B50V-182J                         | 1 | 374721824T               |                 |
| C4067          | UTSP C        | CE04W50V-22M(UTSP)                    | 1 | 397582207T               |                 |
| C4068          | UTSP C        | CE04W50V-22M(UTSP)                    | 1 | 397582207T               |                 |
| C4069          | TF C          | ECQ-B50V-222J                         | 1 | 374722224T               |                 |
| C4070          | TF C          | ECQ-B50V-222J                         | 1 | 374722224T               |                 |
| C4073          | C-CERA C      | CC725CH1H-221J1                       | 1 | 342102214R1              | <na906></na906> |
| C4074          | C-CERA C      | CC725CH1H-221J1                       | 1 | 342102214R1              | <na906></na906> |
| C4075          | UTSP C        | CE04W50V-10M(UTSP)                    | 1 | 397581007T               | <na906></na906> |
| C4076          | UTSP C        | CE04W50V-10M(UTSP)                    | 1 | 397581007T               | <na906></na906> |
| C4079          | UTSP C        | CE04W25V-220M(UTSP)                   | 1 | 397552217T               |                 |
| C4080          | UTSP C        | CE04W25V-220M(UTSP)                   | 1 | 397552217T               |                 |
| C4081          | UTSP C        | CE04W50V-100M(UTSP)                   | 1 | 397581017T               |                 |
| C4083          | UTSP C        | CE04W50V-100M(UTSP)                   | 1 | 397581017T               |                 |
| C4085          | UTSP C        | CE04W50V-100M(UTSP)                   | 1 | 397581017T               |                 |
| C4087          | TRM(TEST PIN) | TP00509-3C                            | 1 | 25060406T                |                 |
| C4088          | TRM(TEST PIN) | TP00509-3C                            | 1 | 25060406T                |                 |
| C4089          | TRM(TEST PIN) | TP00509-3C                            | 1 | 25060406T                |                 |
| C4090          | TRM(TEST PIN) | TP00509-3C                            | 1 | 25060406T                |                 |
| C4091          | TF C          | ECQ-B50V-102J                         | 1 | 374721024T               |                 |
| C4094          | UTSP C        | CE04W50V-100M(UTSP)                   | 1 | 397581017T               |                 |
| C4101          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4102          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4103          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4104          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
| C4105          | UTSP C        | CE04W50V 47M(UTSP)                    | 1 | 397584707T               |                 |
|                |               |                                       |   |                          |                 |

| C4106              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
|--------------------|----------|---------------------|---|-------------|---|
| C4107              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4108              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4111              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4112              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4119              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  | <dc, dd,="" dt="" mp,="" mt,=""></dc,>  |
| C4120              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  | <dc, dd,="" dt="" mp,="" mt,=""></dc,>  |
| C4175              | C-CERA C | CC725SL1E-152J1     | 1 | 342131524R1 |   |
| C4176              | C-CERA C | CC725SL1E-152J1     | 1 | 342131524R1 |   |
| C4177              | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |   |
| C4178              | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |   |
| C4215              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4216              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4217              | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |   |
| C4218              | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |   |
| C4219              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4220              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4221              | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |   |
| C4222              | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |   |
| C4243              | C-CERA C | CC725CH1H-102J1     | 1 | 342101024R1 |   |
| C4302              | UTSP C   | CE04W50V-100M(UTSP) | 1 | 397581017T  |   |
| C4311              | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |   |
| C4312              | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 | *************************************** |
| C4313              | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |   |
| C4314              | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |   |
| C4315              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4316              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4319              | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |   |
| C4320              | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |   |
| C4321              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4322              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4401              | UTSP C   | CE04W25V-100M(UTSP) | 1 | 397551017T  |   |
| C4402              | UTSP C   | CE04W25V-100M(UTSP) | 1 | 397551017T  |   |
| C4403              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4404              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4405              | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T  |   |
| C4406              | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T  |   |
| C4407              | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |   |
| C4408              | C-CERA C | CK725F1H-104Z1      | 1 | 332151040R1 |   |
| C4409              | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |   |
| C4410              | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |   |
| C4411              | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |   |
| C4412              | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |   |
| C4413              | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |   |
| C4414              | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |   |
| C4415              | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |   |
| C4416              | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |   |
| C4410<br>C4417     | UTSP C   | CE04W50V-100M(UTSP) | 1 | 397581007T  |   |
| ∪ <del>11</del> 1/ | 0151 C   | CE04M20A-100M(C12t) | 1 | 37/30101/1  |   |

| C4419          | C-CERA C         | CC725CH1H-102J1                       | 1             | 342101024R1                |
|----------------|------------------|---------------------------------------|---------------|----------------------------|
| C4420          | UTSP C           | CE04W50V-10M(UTSP)                    | 1             | 397581007T                 |
| C4421          | TRM(TEST PIN)    | TP00509-3C                            | 1             | 25060406T                  |
| C4422          | TRM(TEST PIN)    | TP00509-3C                            | 1             | 25060406T                  |
| C4423          | TFC              | ECQ-V50V-104J                         | 1             | 374721044T                 |
| C4424          | TFC              | ECQ-V50V-104J                         | 1             | 374721044T                 |
| C4501          | UTSP C           | CE04W50V 47M(UTSP)                    | 1             | 397584707T                 |
| C4502          | UTSP C           | CE04W50V 47M(UTSP)                    | 1             | 397584707T                 |
| C4503          | C-CERA C         | CC725CH1H-101J1                       | 1             | 342101014R1                |
| C4504          | C-CERA C         | CC725CH1H-101J1                       | 1             | 342101014R1                |
| C4505          | TF C             | ECQ-V50V-104J                         | 1             | 374721044T                 |
| C4600          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1                |
| C4601          | C-CERA C         | CC725CH1H-221J1                       | <u>.</u><br>1 | 342102214R1                |
| C4602          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1                |
| C4603          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1                |
| C4604          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1                |
| C4605          | C-CERA C         | CC725CH1H-221J1                       | <u>1</u><br>1 | 342102214R1                |
| C4606          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1                |
| C4607          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1<br>342102214R1 |
| C4610          | UTSP C           | CE04W50V 47M(UTSP)                    | 1             | 397584707T                 |
| C4611          | UTSP C           | CE04W30V 47M(UTSP)                    | 1             | 397584707T                 |
| C4612          | UTSP C           | CE04W30V 47M(UTSP)                    | 1             | 397584707T                 |
| C4612          | UTSP C           |                                       | 1             | 397584707T                 |
| C4613          | UTSP C           | CE04W50V 47M(UTSP)                    | 1             |                            |
| C4614<br>C4615 | UTSP C           | CE04W50V 47M(UTSP)                    | 1             | 397584707T                 |
|                |                  | CE04W50V 47M(UTSP)                    |               | 397584707T                 |
| C4616<br>C4617 | UTSP C<br>UTSP C | CE04W50V 47M(UTSP)                    | 1             | 397584707T                 |
|                |                  | CE04W50V 47M(UTSP)                    | 1             | 397584707T                 |
| C4622<br>C4623 | UTSP C<br>UTSP C | CE04W50V 47M(UTSP) CE04W50V 47M(UTSP) | 1             | 397584707T<br>397584707T   |
|                |                  |                                       |               |                            |
| C4624<br>C4625 | UTSP C           | CE04W50V 47M(UTSP)                    | 1             | 397584707T                 |
|                | UTSP C           | CE04W50V 47M(UTSP)                    | 1             | 397584707T                 |
| C4626<br>C4627 | UTSP C<br>UTSP C | CE04W50V 47M(UTSP)                    | 1             | 397584707T                 |
|                |                  | CE04W50V 47M(UTSP)                    | 1             | 397584707T                 |
| C4630          | C-CERA C         | CC725CH1H-221J1                       |               | 342102214R1                |
| C4631          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1                |
| C4632          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1                |
| C4633          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1                |
| C4634          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1                |
| C4635          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1                |
| C4636          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1                |
| C4637          | C-CERA C         | CC725CH1H-221J1                       | 1             | 342102214R1                |
| C4650          | UTSJ C           | CE04W50V-47M(UTSJ)                    | 1             | 398084707T                 |
| C4651          | UTSJ C           | CE04W50V-47M(UTSJ)                    | 1             | 398084707T                 |
| C4652          | UTSJ C           | CE04W50V-47M(UTSJ)                    | 1             | 398084707T                 |
| C4653          | UTSJ C           | CE04W50V-47M(UTSJ)                    | 1             | 398084707T                 |
| C4654          | UTSJ C           | CE04W50V-47M(UTSJ)                    | 1             | 398084707T                 |
| C4655          | UTSJ C           | CE04W50V-47M(UTSJ)                    | 1             | 398084707T                 |
| C4656          | UTSJ C           | CE04W50V-47M(UTSJ)                    | 1             | 398084707T                 |

| C4657          | UTSJ C                   | CE04W50V-47M(UTSJ)             | 1 | 398084707T                 |
|----------------|--------------------------|--------------------------------|---|----------------------------|
| R2001          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2002          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2003          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2004          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2005          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2006          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2007          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2008          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2009          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2010          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2011          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2012          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2013          | C-CARBON R               | RN72K1J-104JE                  | 1 | 435031044R1                |
| R2014          | C-CARBON R               | RN72K1J-104JE                  | 1 | 435031044R1                |
| R2015          | C-CARBON R               | RN72K1J-104JE                  | 1 | 435031044R1                |
| R2016          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2017          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2018          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2019          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2020          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2021          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2022          | C-CARBON R               | RN72K1J-750JE<br>RN72K1J-750JE | 1 | 435037504R1                |
| R2023          | C-CARBON R               | RN72K1J-750JE<br>RN72K1J-750JE | 1 | 435037504R1                |
| R2024          | C-CARBON R               | RN72K1J-750JE<br>RN72K1J-750JE | 1 | 435037504R1                |
| R2025          | C-CARBON R               | RN72K1J-7503E<br>RN72K1J-104JE | 1 | 435031044R1                |
| R2026          | C-CARBON R               | RN72K1J-104JE<br>RN72K1J-104JE | 1 | 435031044R1                |
| R2027          | C-CARBON R               | RN72K1J-104JE<br>RN72K1J-104JE | 1 | 435031044R1<br>435031044R1 |
| R2028          | C-CARBON R               | RN72K1J-750JE                  | 1 | 435037504R1                |
| R2029          | C-CARBON R               | RN72K1J-7503E<br>RN72K1J-104JE | 1 | 435031044R1                |
| R2029          | C-CARBON R               | RN72K1J-104JE<br>RN72K1J-103JE | 1 | 435031044R1<br>435031034R1 |
| R2030          | C-CARBON R               | RN72K1J-103JE<br>RN72K1J-103JE | 1 | 435031034R1<br>435031034R1 |
| R2031          | C-CARBON R               |                                | 1 |                            |
| R2032<br>R2033 | C-CARBON R               | RN72K1J-103JE<br>RN72K1J-104JE | 1 | 435031034R1<br>435031044R1 |
| R2033          | C-CARBON R               |                                | 1 | 435031044R1<br>435031044R1 |
| R2034<br>R2035 |                          | RN72K1J-104JE                  | 1 |                            |
| R2035          | C-CARBON R               | RN72K1J-103JE                  | 1 | 435031034R1                |
|                | C-CARBON R<br>C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |
| R2038          |                          | RN72K1J-104JE                  |   | 435031044R1                |
| R2039          | C-CARBON R               | RN72K1J-104JE                  | 1 | 435031044R1                |
| R2040          | C-CARBON R               | RN72K1J-104JE                  |   | 435031044R1                |
| R2041          | C-CARBON R               | RN72K1J-104JE                  | 1 | 435031044R1                |
| R2042          | C-CARBON R               | RN72K1J-104JE                  | 1 | 435031044R1                |
| R2043          | C-CARBON R               | RN72K1J-104JE                  | 1 | 435031044R1                |
| R2046          | C-CARBON R               | RN72K1J-022JE                  | 1 | 435030224R1                |
| R2047          | C-CARBON R               | RN72K1J-022JE                  | 1 | 435030224R1                |
| R2052          | C-CARBON R               | RN72K1J-151JE                  | 1 | 435031514R1                |
| R2053          | C-CARBON R               | RN72K1J-151JE                  | 1 | 435031514R1                |
| R2054          | C-CARBON R               | RN72K1J-151JE                  | 1 | 435031514R1                |

| R2055          | C-CARBON R | RN72K1J-151JE                  | 1 | 435031514R1                |  |
|----------------|------------|--------------------------------|---|----------------------------|--|
| R2056          | C-CARBON R | RN72K1J-131JE<br>RN72K1J-047JE | 1 | 435030474R1                |  |
| R2056          | C-CARBON R | RN72K1J-04/JE<br>RN72K1J-750JE | 1 | 435037504R1                |  |
| R2057          | C-CARBON R | RN72K1J-750JE<br>RN72K1J-750JE | 1 | 435037504R1<br>435037504R1 |  |
| R2059          |            |                                | 1 |                            |  |
|                | C-CARBON R | RN72K1J-750JE                  |   | 435037504R1                |  |
| R2060          | C-CARBON R | RN72K1J-104JE                  | 1 | 435031044R1                |  |
| R2061          | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |  |
| R2062          | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |  |
| R2063          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R2064          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R2065          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R2066          | C-CARBON R | RN72K1J-104JE                  | 1 | 435031044R1                |  |
| R2067          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R2068          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R2069          | C-CARBON R | RN72K1J-104JE                  | 1 | 435031044R1                |  |
| R2070          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R2074          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R2075          | C-CARBON R | RN72K1J-680JE                  | 1 | 435036804R1                |  |
| R2076          | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1                |  |
| R2077          | C-CARBON R | RN72K1J-333JE                  | 1 | 435033334R1                |  |
| R2078          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R2079          | C-CARBON R | RN72K1J-680JE                  | 1 | 435036804R1                |  |
| R2080          | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1                |  |
| R2081          | C-CARBON R | RN72K1J-333JE                  | 1 | 435033334R1                |  |
| R2082          | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |  |
| R2083          | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |  |
| R2084          | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |  |
| R2085          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |  |
| R2086          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |  |
| R2201          | C-CARBON R | RN72K1J-750JE                  | 1 | 435037504R1                |  |
| R2202          | C-CARBON R | RN72K1J-750JE                  | 1 | 435037504R1                |  |
| R2203          | C-CARBON R | RN72K1J-750JE                  | 1 | 435037504R1                |  |
| R2204          | C-CARBON R | RN72K1J-750JE                  | 1 | 435037504R1                |  |
| R2205          | C-CARBON R | RN72K1J-750JE                  | 1 | 435037504R1                |  |
| R2206          | C-CARBON R | RN72K1J-750JE                  | 1 | 435037504R1                |  |
| R2207          | C-CARBON R | RN72K1J-750JE                  | 1 | 435037504R1                |  |
| R2208          | C-CARBON R | RN72K1J-750JE                  | 1 | 435037504R1                |  |
| R2209          | C-CARBON R | RN72K1J-750JE                  | 1 | 435037504R1                |  |
| R2216          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R2217          | C-CARBON R | RN72K1J-103JE<br>RN72K1J-101JE | 1 | 435031014R1                |  |
| R2217          | C-CARBON R | RN72K1J-101JE<br>RN72K1J-101JE | 1 | 435031014R1                |  |
| R2219          | C-CARBON R | RN72K1J-101JE<br>RN72K1J-022JE | 1 | 435030224R1                |  |
| R2220          | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |  |
| R2220          | C-CARBON R | RN72K1J-102JE<br>RN72K1J-102JE | 1 | 435031024R1<br>435031024R1 |  |
| R2221<br>R2222 |            |                                | 1 |                            |  |
|                | C-CARBON R | RN72K1J-102JE                  |   | 435031024R1                |  |
| R2223          | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |  |
| R2227          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R2228          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |

| D0000 |            | DAYSOVI LA COOKE |   | 4050000 (D.) |
|-------|------------|------------------|---|--------------|
| R2229 | C-CARBON R | RN72K1J-222JE    | 1 | 435032224R1  |
| R2230 | C-CARBON R | RN72K1J-102JE    | 1 | 435031024R1  |
| R2231 | C-CARBON R | RN72K1J-022JE    | 1 | 435030224R1  |
| R2233 | C-CARBON R | RN72K1J-330JE    | 1 | 435033304R1  |
| R2234 | C-CARBON R | RN72K1J-330JE    | 1 | 435033304R1  |
| R2235 | C-CARBON R | RN72K1J-330JE    | 1 | 435033304R1  |
| R2237 | C-CARBON R | RN72K1J-750JE    | 1 | 435037504R1  |
| R2238 | C-CARBON R | RN72K1J-033JE    | 1 | 435030334R1  |
| R2239 | C-CARBON R | RN72K1J-033JE    | 1 | 435030334R1  |
| R2240 | C-CARBON R | RN72K1J-033JE    | 1 | 435030334R1  |
| R2241 | C-CARBON R | RN72K1J-750JE    | 1 | 435037504R1  |
| R2242 | C-CARBON R | RN72K1J-750JE    | 1 | 435037504R1  |
| R2246 | C-CARBON R | RN72K1J-022JE    | 1 | 435030224R1  |
| R2247 | C-CARBON R | RN72K1J-102JE    | 1 | 435031024R1  |
| R2248 | C-CARBON R | RN72K1J-104JE    | 1 | 435031044R1  |
| R2250 | C-CARBON R | RN72K1J-271JE    | 1 | 435032714R1  |
| R2263 | C-CARBON R | RN72K1J-104JE    | 1 | 435031044R1  |
| R2271 | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1  |
| R2501 | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1  |
| R2502 | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1  |
| R2503 | C-CARBON R | RN72K1J-821JE    | 1 | 435038214R1  |
| R2504 | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1  |
| R2505 | METAL R    | RNU1/2WCJ-0.47   | 1 | 453534794T   |
| R2506 | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1  |
| R2507 | METAL R    | RNU1/2WCJ-0.22   | 1 | 453532294T   |
| R2508 | C-CARBON R | RN72K1J-102JE    | 1 | 435031024R1  |
| R2509 | C-CARBON R | RN72K1J-473JE    | 1 | 435034734R1  |
| R2510 | METAL R    | RNU1WCJ-0.22     | 1 | 453632294T   |
| R2511 | C-CARBON R | RN72K2E-015JE    | 1 | 435220154R1  |
| R2512 | METAL R    | RNU2WCJ-4.7      | 1 | 452730474F   |
| R2513 | METAL R    | RNU2WCJ-4.7      | 1 | 452730474F   |
| R2514 | METAL R    | RNU2WCJ-4.7      | 1 | 452730474F   |
| R2515 | C-CARBON R | RN72K1J-471JE    | 1 | 435034714R1  |
| R2516 | C-CARBON R | RN72K1J-471JE    | 1 | 435034714R1  |
| R2601 | C-CARBON R | RN72K1J-101JE    | 1 | 435031014R1  |
| R2602 | C-CARBON R | RN72K1J-101JE    | 1 | 435031014R1  |
| R2609 | C-CARBON R | RN72K1J-039JE    | 1 | 435030394R1  |
| R2610 | C-CARBON R | RN72K1J-224JE    | 1 | 435032244R1  |
| R2611 | C-CARBON R | RN72K1J-102JE    | 1 | 435031024R1  |
| R2616 | C-CARBON R | RN72K1J-000JE    | 1 | 435030004R1  |
| R2617 | C-CARBON R | RN72K1J-000JE    | 1 | 435030004R1  |
| R2618 | C-CARBON R | RN72K1J-000JE    | 1 | 435030004R1  |
| R2620 | C-CARBON R | RN72K1J-000JE    | 1 | 435030004R1  |
| R4001 | C-CARBON R | RN72K1J-331JE    | 1 | 435033314R1  |
| R4002 | C-CARBON R | RN72K1J-331JE    | 1 | 435033314R1  |
| R4003 | C-CARBON R | RN72K1J-563JE    | 1 | 435035634R1  |
| R4004 | C-CARBON R | RN72K1J-563JE    | 1 | 435035634R1  |
| R4005 | C-CARBON R | RN72K1J-331JE    | 1 | 435033314R1  |
|       |            |                  |   |              |

| R4006  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
|--------|------------|--------------------------------|---|-------------|
| R4007  | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1 |
| R4008  | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1 |
| R4009  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
| R4010  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
| R4011  | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1 |
| R4012  | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1 |
| R4013  | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1 |
| R4014  | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1 |
| R4015  | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1 |
| R4016  | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1 |
| R4017  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
| R4018  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
| R4019  | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1 |
| R4020  | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1 |
| R4021  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
| R4022  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
| R4023  | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1 |
| R4024  | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1 |
| R4025  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
| R4026  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
| R4027  | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1 |
| R4028  | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1 |
| R4029  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
| R4030  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
| R4031  | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1 |
| R4032  | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1 |
| R4033  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
| R4034  | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |
| R4035  | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1 |
| R4036  | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1 |
| R4037  | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1 |
| R4038  | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1 |
| R4041  | C-CARBON R | RN72K1J-100JE                  | 1 | 435031004R1 |
| R4042  | C-CARBON R | RN72K1J-100JE                  | 1 | 435031004R1 |
| R4043  | C-CARBON R | RN72K1J-101JE                  | 1 | 435031014R1 |
| R4044  | C-CARBON R | RN72K1J-101JE                  | 1 | 435031014R1 |
| R4045  | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1 |
| R4046  | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1 |
| R4047  | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1 |
| R4048  | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1 |
| R4051  | C-CARBON R | RN72K1J-100JE                  | 1 | 435031004R1 |
| R4052  | C-CARBON R | RN72K1J-100JE                  | 1 | 435031004R1 |
| R4053  | C-CARBON R | RN72K1J-100JE<br>RN72K1J-101JE | 1 | 435031014R1 |
| R4054  | C-CARBON R | RN72K1J-101JE                  | 1 | 435031014R1 |
| R4055  | C-CARBON R | RN72K1J-101JE<br>RN72K1J-221JE | 1 | 435032214R1 |
| R4056  | C-CARBON R | RN72K1J-221JE<br>RN72K1J-221JE | 1 | 435032214R1 |
| R4057  | C-CARBON R | RN72K1J-221JE<br>RN72K1J-224JE | 1 | 435032244R1 |
| 134037 | C-CARDON K | KIV/ZKIJ-ZZ+JL                 | 1 | +JJUJ22++K1 |

| D 4050 | C CARRON R  | DNZOVII OOJIE  |   | 425022244D1 |                 |
|--------|-------------|----------------|---|-------------|-----------------|
| R4058  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4061  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4062  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4065  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4066  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4069  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4070  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4073  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4074  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4077  | C-CARBON R  | RN72K1J-102JE  | 1 | 435031024R1 |                 |
| R4078  | C-CARBON R  | RN72K1J-102JE  | 1 | 435031024R1 |                 |
| R4079  | C-CARBON R  | RN72K1J-563JE  | 1 | 435035634R1 |                 |
| R4080  | C-CARBON R  | RN72K1J-563JE  | 1 | 435035634R1 |                 |
| R4081  | METAL O R   | RS1/2WBJ-2.7K  | 1 | 443522724T  |                 |
| R4082  | METAL O R   | RS1/2WBJ-2.7K  | 1 | 443522724T  |                 |
| R4083  | C-CARBON R  | RN72K1J-223JE  | 1 | 435032234R1 |                 |
| R4084  | C-CARBON R  | RN72K1J-223JE  | 1 | 435032234R1 |                 |
| R4085  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4086  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4087  | C-CARBON R  | RN72K1J-272JE  | 1 | 435032724R1 |                 |
| R4088  | C-CARBON R  | RN72K1J-272JE  | 1 | 435032724R1 |                 |
| R4089  | C-CARBON R  | RN72K1J-332JE  | 1 | 435033324R1 |                 |
| R4090  | C-CARBON R  | RN72K1J-332JE  | 1 | 435033324R1 |                 |
| R4091  | C-CARBON R  | RN72K1J-332JE  | 1 | 435033324R1 |                 |
| R4092  | C-CARBON R  | RN72K1J-332JE  | 1 | 435033324R1 |                 |
| R4093  | C-CARBON R  | RN72K1J-393JE  | 1 | 435033934R1 |                 |
| R4094  | C-CARBON R  | RN72K1J-393JE  | 1 | 435033934R1 |                 |
| R4095  | C-CARBON R  | RN72K1J-474JE  | 1 | 435034744R1 |                 |
| R4096  | C-CARBON R  | RN72K1J-474JE  | 1 | 435034744R1 |                 |
| R4097  | C-CARBON R  | RN72K1J-821JE  | 1 | 435038214R1 |                 |
| R4098  | C-CARBON R  | RN72K1J-821JE  | 1 | 435038214R1 |                 |
| R4099  | C-CARBON R  | RN72K1J-821JE  | 1 | 435038214R1 |                 |
| R4100  | C-CARBON R  | RN72K1J-821JE  | 1 | 435038214R1 |                 |
| R4101  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4102  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 |                 |
| R4103  | C-CARBON R  | RN72K1J-331JE  | 1 | 435033314R1 | <na906></na906> |
| R4104  | C-CARBON R  | RN72K1J-331JE  | 1 | 435033314R1 | <na906></na906> |
| R4105  | C-CARBON R  | RN72K1J-563JE  | 1 | 435035634R1 | <na906></na906> |
| R4106  | C-CARBON R  | RN72K1J-563JE  | 1 | 435035634R1 | <na906></na906> |
| R4107  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 | <na906></na906> |
| R4108  | C-CARBON R  | RN72K1J-224JE  | 1 | 435032244R1 | <na906></na906> |
| R4113  | NF CARBON R | R25J-100       | 1 | 415471014T  |                 |
| R4114  | NF CARBON R | R25J-100       | 1 | 415471014T  |                 |
| R4115  | METAL O R   | RS1/2WBJ-22    | 1 | 443522204T  |                 |
| R4116  | METAL O R   | RS1/2WBJ-22    | 1 | 443522204T  |                 |
| R4117  | METAL O R   | RS1/2WBJ-22    | 1 | 443522204T  |                 |
| R4118  | METAL O R   | RS1/2WBJ-22    | 1 | 443522204T  |                 |
| R4119  | METAL O R   | RS1/2WBJ-22    | 1 | 443522204T  |                 |
|        |             | 1001/211107 22 | 1 |             |                 |

| R4120         | METAL O R  | RS1/2WBJ-22                    | 1 | 443522204T                 |  |
|---------------|------------|--------------------------------|---|----------------------------|--|
| R4121         | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4122         | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4123         | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4124         | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4125         | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4126         | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4127         | METAL O R  | RS1/2WBJ-22                    | 1 | 443522204T                 |  |
| R4128         | METAL O R  | RS1/2WBJ-22                    | 1 | 443522204T                 |  |
| R4129         | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R4130         | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R4131         | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R4133         | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                |  |
| R4134         | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                |  |
| R4135         | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                |  |
| 4136          | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                |  |
| R4151         | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1                |  |
| R4152         | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1                |  |
| R4153         | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1                |  |
| R4154         | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1                |  |
| R4155         | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1                |  |
| R4156         | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1                |  |
| R4157         | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1                |  |
| R4158         | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1                |  |
| R4159         | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R4160         | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R4161         | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R4162         | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |  |
| R4163         | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1                |  |
| R4164         | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1                |  |
| R4165         | C-CARBON R | RN72K1J-101JE                  | 1 | 435031014R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4166         | C-CARBON R | RN72K1J-101JE                  | 1 | 435031014R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4167         | C-CARBON R | RN72K1J-104JE                  | 1 | 435031044R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4168         | C-CARBON R | RN72K1J-104JE                  | 1 | 435031044R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4169         | C-CARBON R | RN72K1J-473JE                  | 1 | 435034734R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4170         | C-CARBON R | RN72K1J-101JE                  | 1 | 435031014R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4171         | C-CARBON R | RN72K1J-104JE                  | 1 | 435031044R1                | <dc, dd,="" dt="" mp,="" mt,=""></dc,> |
| R4175         | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                | 50, 55, M, M, 51,                      |
| R4176         | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |  |
| R4177         | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |  |
| R4178         | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |  |
| R4179         | C-CARBON R | RN72K1J-122JE                  | 1 | 435031024R1                |  |
| R4180         | C-CARBON R | RN72K1J-122JE                  | 1 | 435031224R1                |  |
| R4217         | C-CARBON R | RN72K1J-224JE                  | 1 | 43503224R1                 |  |
| R4217         | C-CARBON R | RN72K1J-224JE<br>RN72K1J-224JE | 1 | 435032244R1                |  |
| R4219         | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |  |
| R4219         | C-CARBON R | RN72K1J-221JE<br>RN72K1J-221JE | 1 | 435032214R1<br>435032214R1 |  |
| R4220         | C-CARBON R | RN72K1J-221JE<br>RN72K1J-101JE | 1 | 435031014R1                |  |
| <b>44</b> 221 | C-CARDON K | KIN/2K1J-1U1JE                 | 1 | 455051014K1                |  |

| R4222 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
|-------|------------|---------------|---|-------------|--|
| R4223 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |  |
| R4224 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |  |
| R4225 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4226 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4227 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R4228 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R4229 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4230 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4231 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R4232 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R4233 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R4234 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R4235 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |  |
| R4236 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |  |
| R4237 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4238 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4239 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R4240 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R4257 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4258 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4301 | METAL O R  | RS1/2WBJ-22   | 1 | 443522204T  |  |
| R4302 | METAL O R  | RS1/2WBJ-22   | 1 | 443522204T  |  |
| R4303 | C-CARBON R | RN72K1J-560JE | 1 | 435035604R1 |  |
| R4304 | C-CARBON R | RN72K1J-560JE | 1 | 435035604R1 |  |
| R4305 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |  |
| R4306 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |  |
| R4307 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 |  |
| R4308 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 |  |
| R4309 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R4310 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R4311 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 |  |
| R4312 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 |  |
| R4313 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R4314 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R4315 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R4316 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R4319 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R4320 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R4321 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R4322 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R4323 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R4324 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R4327 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R4328 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R4329 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4330 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4331 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
|       |            |               |   |             |  |

| R4332 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
|-------|------------|---------------|---|-------------|
| R4335 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R4336 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R4337 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R4338 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R4339 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R4340 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R4341 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R4342 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R4343 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R4344 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R4345 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R4347 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |
| R4348 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |
| R4401 | METAL O R  | RS1/2WBJ-22   | 1 | 442522204F  |
| R4402 | METAL O R  | RS1/2WBJ-22   | 1 | 442522204F  |
| R4403 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |
| R4404 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |
| R4405 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R4406 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R4407 | METAL O R  | RS1/2WBJ-1.2K | 1 | 443521224T  |
| R4408 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R4409 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |
| R4410 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R4411 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R4412 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |
| R4413 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |
| R4414 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |
| R4415 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |
| R4416 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |
| R4417 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 |
| R4418 | C-CARBON R | RN72K1J-183JE | 1 | 435031834R1 |
| R4419 | METAL O R  | RS1/2WBJ-22   | 1 | 443522204T  |
| R4420 | METAL O R  | RS1/2WBJ-22   | 1 | 443522204T  |
| R4421 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 |
| R4422 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 |
| R4501 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 |
| R4502 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 |
| R4503 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |
| R4504 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |
| R4505 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |
| R4506 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |
| R4507 | C-CARBON R | RN72K1J-563JE | 1 | 435035634R1 |
| R4508 | C-CARBON R | RN72K1J-563JE | 1 | 435035634R1 |
| R4509 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |
| R4510 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |
| R4511 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |
| R4512 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |
|       |            |               |   |             |

| D4512          | METAL O D              | DC1/3WD1 47                | 1 | 443524704T               |   |
|----------------|------------------------|----------------------------|---|--------------------------|---|
| R4513<br>R4514 | METAL O R              | RS1/2WBJ-47<br>RS1/2WBJ-47 | 1 |                          | *************************************** |
| R4514<br>R4515 | METAL O R<br>METAL O R | RS1/2WBJ-47<br>RS1/2WBJ-47 | 1 | 443524704T<br>443524704T | *************************************** |
| R4516          | METAL O R              | RS1/2WBJ-47<br>RS1/2WBJ-47 | 1 | 443524704T               |   |
| R4517          |                        |                            | 1 |                          |   |
|                | C-CARBON R             | RN72K1J-182JE              |   | 435031824R1              |   |
| R4518          | C-CARBON R             | RN72K1J-104JE              | 1 | 435031044R1              |   |
| R4519          | C-CARBON R             | RN72K1J-390JE              | 1 | 435033904R1              |   |
| R4600          | C-CARBON R             | RN72K1J-331JE              | 1 | 435033314R1              |   |
| R4601          | C-CARBON R             | RN72K1J-331JE              | 1 | 435033314R1              |   |
| R4602          | C-CARBON R             | RN72K1J-331JE              | 1 | 435033314R1              |   |
| R4603          | C-CARBON R             | RN72K1J-331JE              | 1 | 435033314R1              |   |
| R4604          | C-CARBON R             | RN72K1J-331JE              | 1 | 435033314R1              |   |
| R4605          | C-CARBON R             | RN72K1J-331JE              | 1 | 435033314R1              |   |
| R4606          | C-CARBON R             | RN72K1J-331JE              | 1 | 435033314R1              |   |
| R4607          | C-CARBON R             | RN72K1J-331JE              | 1 | 435033314R1              |   |
| R4610          | C-CARBON R             | RN72K1J-563JE              | 1 | 435035634R1              |   |
| R4611          | C-CARBON R             | RN72K1J-563JE              | 1 | 435035634R1              |   |
| R4612          | C-CARBON R             | RN72K1J-563JE              | 1 | 435035634R1              |   |
| R4613          | C-CARBON R             | RN72K1J-563JE              | 1 | 435035634R1              |   |
| R4614          | C-CARBON R             | RN72K1J-563JE              | 1 | 435035634R1              |   |
| R4615          | C-CARBON R             | RN72K1J-563JE              | 1 | 435035634R1              |   |
| R4616          | C-CARBON R             | RN72K1J-563JE              | 1 | 435035634R1              |   |
| R4617          | C-CARBON R             | RN72K1J-563JE              | 1 | 435035634R1              |   |
| R4620          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4621          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4622          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4623          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4624          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4625          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4626          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4627          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4632          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4633          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4634          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4635          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4636          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4637          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4640          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4641          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4642          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4643          | C-CARBON R             | RN72K1J-223JE              | 1 | 435032234R1              |   |
| R4644          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4645          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4646          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4647          | C-CARBON R             | RN72K1J-224JE              | 1 | 435032244R1              |   |
| R4650          | C-CARBON R             | RN72K1J-221JE              | 1 | 435032214R1              |   |
| R4651          | C-CARBON R             | RN72K1J-221JE              | 1 | 435032214R1              |   |
| R4652          | C-CARBON R             | RN72K1J-221JE              | 1 | 435032214R1              |   |
|                | _ 0.111201.11          | 141721110 22102            | 1 |                          |   |

| R4653    | C-CARBON R | RN72K1J-221JE                  | 1   | 435032214R1                |             |
|----------|------------|--------------------------------|-----|----------------------------|-------------|
| R4654    | C-CARBON R | RN72K1J-221JE                  | 1   | 435032214R1                |             |
| R4655    | C-CARBON R | RN72K1J-221JE                  | 1   | 435032214R1                |             |
| R4656    | C-CARBON R | RN72K1J-221JE                  | 1   | 435032214R1                |             |
| R4657    | C-CARBON R | RN72K1J-221JE                  | 1   | 435032214R1                |             |
| R4660    | C-CARBON R | RN72K1J-101JE                  | 1   | 435031014R1                |             |
| R4661    | C-CARBON R | RN72K1J-101JE                  | 1   | 435031014R1                |             |
| R4662    | C-CARBON R | RN72K1J-101JE                  | 1   | 435031014R1                | <del></del> |
| R4663    | C-CARBON R | RN72K1J-101JE                  | 1   | 435031014R1                | <del></del> |
| R4664    | C-CARBON R | RN72K1J-101JE                  | 1   | 435031014R1                |             |
| R4665    | C-CARBON R | RN72K1J-101JE                  | 1   | 435031014R1                |             |
| R4666    | C-CARBON R | RN72K1J-101JE                  | 1   | 435031014R1                |             |
| R4667    | C-CARBON R | RN72K1J-101JE                  | 1   | 435031014R1                |             |
| R4670    | C-CARBON R | RN72K1J-100JE                  | 1   | 435031004R1                |             |
| R4671    | C-CARBON R | RN72K1J-100JE                  | 1   | 435031004R1                |             |
| R4672    | C-CARBON R | RN72K1J-100JE                  | 1   | 435031004R1                |             |
| R4673    | C-CARBON R | RN72K1J-100JE                  | 1   | 435031004R1                |             |
| R4674    | C-CARBON R | RN72K1J-100JE                  | 1   | 435031004R1                |             |
| R4675    | C-CARBON R | RN72K1J-100JE                  | 1   | 435031004R1                |             |
| R4676    | C-CARBON R | RN72K1J-100JE                  | 1   | 435031004R1                |             |
| R4677    | C-CARBON R | RN72K1J-100JE                  | 1   | 435031004R1                |             |
| R4680    | C-CARBON R | RN72K1J-224JE                  | 1   | 435032244R1                |             |
| R4681    | C-CARBON R | RN72K1J-224JE<br>RN72K1J-224JE | 1   | 435032244R1                |             |
| R4682    | C-CARBON R | RN72K1J-224JE                  | 1   | 435032244R1                |             |
| R4683    | C-CARBON R | RN72K1J-224JE                  | 1   | 435032244R1                |             |
| R4684    | C-CARBON R | RN72K1J-224JE<br>RN72K1J-224JE | 1   | 435032244R1                |             |
| R4685    | C-CARBON R | RN72K1J-224JE<br>RN72K1J-224JE | 1   | 435032244R1<br>435032244R1 |             |
| R4686    | C-CARBON R | RN72K1J-224JE<br>RN72K1J-224JE | 1   | 435032244R1<br>435032244R1 |             |
| R4687    | C-CARBON R | RN72K1J-224JE<br>RN72K1J-224JE | 1   | 435032244R1<br>435032244R1 |             |
| R4690    | C-CARBON R | RN72K1J-224JE<br>RN72K1J-470JE | 1   | 435034704R1                |             |
| R4691    | C-CARBON R | RN72K1J-470JE<br>RN72K1J-470JE | 1   | 435034704R1<br>435034704R1 |             |
| R4691    | C-CARBON R |                                | 1   |                            |             |
| R4693    |            | RN72K1J-470JE                  | 1   | 435034704R1                |             |
| R4694    | C-CARBON R | RN72K1J-470JE                  |     | 435034704R1                |             |
|          | C-CARBON R | RN72K1J-470JE                  | 1   | 435034704R1                |             |
| R4695    | C-CARBON R | RN72K1J-470JE                  | 1   | 435034704R1                |             |
| R4696    | C-CARBON R | RN72K1J-470JE                  | 1   | 435034704R1                |             |
| R4697    | C-CARBON R | RN72K1J-470JE                  | 1   | 435034704R1                |             |
| F2501A   | FUSE HOL   | NSCT-1P2031                    | 1   | 25052133T                  | !           |
| F2501B   | FUSE HOL   | NSCT-1P2031                    | 1   | 25052133T                  | !           |
| F2502A   | FUSE HOL   | NSCT-1P2031                    | 1   | 25052133T                  | !           |
| F2502B   | FUSE HOL   | NSCT-1P2031                    | 1   | 25052133T                  | !           |
| JL2601B  | WIRE TRAP  | NPLG-3P586                     | 1   | 25055624                   |             |
| JL4013B  | SOCKET     | NSCT-5P97                      | 1   | 25050269                   |             |
| JL4014B  | SOCKET     | NSCT-6P98                      | 1   | 25050270                   |             |
| JL8002A  | WIRE HOL   | NSCT-5P876                     | 1   | 25051089                   |             |
| JL901B   | WIRE TRAP  | NPLG-7P590                     | 1   | 25055628                   |             |
| P2001    | PIN JACK   | NPJ-10PDSY628                  | 1   | 25045849                   |             |
| P2001 or | PIN JACK   | NPJ-10PDBY481                  | (1) | 25045684                   |             |

| D2002             | DIN LACK             | NDI 10DDCV/20                  | 1   | 25045940             |   |
|-------------------|----------------------|--------------------------------|-----|----------------------|---|
| P2002<br>P2002 or | PIN JACK             | NPJ-10PDSY628                  | 1   | 25045849             |   |
| P2002 or<br>P2003 | PIN JACK<br>PIN JACK | NPJ-10PDBY481<br>NPJ-10PDSY628 | (1) | 25045684<br>25045849 | t to the state of |
| P2003<br>P2003 or |                      |                                |     |                      |   |
| P2003 01<br>P2004 | PIN JACK<br>PIN JACK | NPJ-10PDBY481<br>NPJ-5PDSY629  | (1) | 25045684<br>25045850 |   |
|                   |                      |                                |     |                      |   |
| P2004 or          | PIN JACK             | NPJ-5PDBY482                   | (1) | 25045685             |   |
| P2005             | PIN JACK             | NPJ-1PDY655                    | 1   | 25045882             |   |
| P2010A            | PLUG                 | IMSA-9142B-24A                 | 1   | 25056602             |   |
| P2201             | PIN JACK             | NPJ-6PDGLR649                  | 1   | 25045874             |   |
| P2202             | PIN JACK             | NPJ-6PDGLR649                  | 1   | 25045874             |   |
| P2502             | PLUG                 | NPLG-3P117                     | 1   | 25055133             |   |
| P2601             | ST JACK              | MSJ-035-22                     | 1   | 25045887             |   |
| P2601 or          | JACK                 | YKB21-5130                     | (1) | 25045387             |   |
| P2604             | ST JACK              | HSJ1002-01-6020                | 1   | 25045647             |   |
| P2605             | TRM(SCREW)           | NEJITANSI M3                   | 1   | 25065425             |   |
| P2801A            | SOCKET               | NSCT-31P2124                   | 1   | 25052227             |   |
| P2991             | RETAINER             | (JOINT)                        | 1   | 27142069             |   |
| P4001             | PIN JACK             | NPJ-2PDWR583                   | 1   | 25045803             | <dc, dd,="" dt="" mp,="" mt,=""></dc,>  |
| P4001 or          | PIN JACK             | NPJ-2PDBL249                   | (1) | 25045424             | <dc, dd,="" dt="" mp,="" mt,=""></dc,>  |
| P4001             | PIN JACK             | NPJ-4PDRW592                   | 1   | 25045812             | <na906></na906>   |
| P4001 or          | PIN JACK             | NPJ-4PDRW393                   | (1) | 25045582             | <na906></na906>   |
| P4003             | PIN JACK             | NPJ-6PDRW665                   | 1   | 25045894             |   |
| P4003 or          | PIN JACK             | NPJ-6PDBL380                   | (1) | 25045565             |   |
| P4004             | PIN JACK             | NPJ-6PDRW665                   | 1   | 25045894             |   |
| P4004 or          | PIN JACK             | NPJ-6PDBL380                   | (1) | 25045565             |   |
| P4005             | PIN JACK             | NPJ-6PDRW665                   | 1   | 25045894             |   |
| P4005 or          | PIN JACK             | NPJ-6PDBL380                   | (1) | 25045565             |   |
| P4006             | PIN JACK             | NPJ-4PDGPRW659                 | 1   | 25045888             |   |
| P4006 or          | PIN JACK             | NPJ-4PDGPRW503                 | (1) | 25045708             |   |
| P4007             | PIN JACK             | NPJ-4PDELNT660                 | 1   | 25045889             |   |
| P4007 or          | PIN JACK             | NPJ-4PDELNT505                 | (1) | 25045710             |   |
| P4008             | PIN JACK             | NPJ-4PDRW592                   | 1   | 25045812             |   |
| P4008 or          | PIN JACK             | NPJ-4PDRW393                   | (1) | 25045582             |   |
| P4008 or          | PIN JACK             | NPJ-4PDBL308                   | (1) | 25045491             |   |
| P4009             | PIN JACK             | NPJ-4PDGPRW659                 | 1   | 25045888             |   |
| P4009 or          | PIN JACK             | NPJ-4PDGPRW503                 | (1) | 25045708             |   |
| P4010             | PIN JACK             | NPJ-4PDELNT660                 | 1   | 25045889             |   |
| P4010 or          | PIN JACK             | NPJ-4PDELNT505                 | (1) | 25045710             |   |
| P4020A            | PLUG                 | IMSA-9142B-26A                 | 1   | 25056603             |   |
| P4021A            | PLUG                 | IMSA-9142B-26A                 | 1   | 25056603             |   |
| P4030A            | PLUG                 | NPLG-9P661                     | 1   | 25055705             |   |
| P4030B            | SOCKET               | NSCT-9P1024                    | 1   | 25051234             |   |
| P4032A            | PLUG                 | NPLG-8P660                     | 1   | 25055704             |   |
| P4033A            | PLUG                 | NPLG-13P665                    | 1   | 25055709             |   |
| P4201             | TRM(SCREW)           | NEJITANSI M3                   | 1   | 25065425             |   |
| P4202             | TRM                  | NTM-1P233(M1969)               | 1   | 25060302             |   |
| P5000             | PLUG                 | NPLG-13P360                    | 1   | 25055377             |   |
| P5001B            | CRIMP AS             | CRIMP SR805_2                  | 1   | 20799170UL           |   |
| 100010            | CIVIIVII 11D         | CRIMI DROUJ_Z                  | 1   | 201771100L           |   |

| RL4401    | RELAY | NRL-2P2A-DC12-178 | 1   | 25065664 |  |
|-----------|-------|-------------------|-----|----------|--|
| RL4402    | RELAY | NRL-2P2A-DC12-178 | 1   | 25065664 |  |
| RL4403    | RELAY | NRL-2P2A-DC12-178 | 1   | 25065664 |  |
| RL4404    | RELAY | NRL-2P2A-DC12-178 | 1   | 25065664 |  |
| RL4501    | RELAY | NRL-2P5A-DC12-187 | 1   | 25065685 |  |
| RL4501 or | RELAY | NRL-2P5A-DC12-192 | (1) | 25065702 |  |

| U11 | SP TERMINAL PC BOARD (NATRM-9055-1K/1L/1U/1M/1Y)   |
|-----|--|
| U12 | SP TERMINAL PC BOARD (NAASP-9056-1K/1L/1U/1M/1Y)   |
| U13 | POWER SUPPLY PC BOARD (NAASP-9057-1K/1L/1U/1M/1Y)  |
| U14 | INLET PC BOARD (NAASP-9058-1K/1L/1U/1M/1Y)         |
| U15 | THERMAL SENSOR PC BOARD (NAPS-9059-1K/1L/1U/1M/1Y) |

| REF. NO. | PART NAME | DESCRIPTION | Q'TY | PART NO. (SN) | REMARKS         |
|----------|-----------|-------------|------|---------------|-----------------|
| Q4903    | TR        | 2SC1815-GR  | 1    | 2211255T      |                 |
| Q4904    | TR        | 2SA1015-GR  | 1    | 2211455T      |                 |
| Q4905    | TR        | 2SK365-GR   | 1    | 2212445T      |                 |
| Q4906    | TR        | 2SK365-GR   | 1    | 2212445T      |                 |
| Q6800    | TR        | RN1226      | 1    | 2214680T      |                 |
| Q6802    | TR        | RN1226      | 1    | 2214680T      |                 |
| Q6805    | TR        | RN1226      | 1    | 2214680T      |                 |
| Q6807    | TR        | RN1226      | 1    | 2214680T      |                 |
| Q6809    | TR        | RN1226      | 1    | 2214680T      |                 |
| Q9100    | TR        | 2SC1815-GR  | 1    | 2211255T      |                 |
| Q9101    | TR        | 2SC1815-GR  | 1    | 2211255T      |                 |
| Q9103    | IC        | NJM2388F09  | 1    | 22242383      | <nr906></nr906> |
| Q9200    | TR        | 2SC1815-GR  | 1    | 2211255T      |                 |
| Q9201    | IC        | SI-3010KF   | 1    | 22242203      |                 |
| Q9203    | IC        | SI-8008TFE  | 1    | 22242448      |                 |
| D4901    | ZENER D   | MTZJ15B     | 1    | 224471502T    |                 |
| D4902    | ZENER D   | MTZJ15B     | 1    | 224471502T    |                 |
| D6800    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| D6802    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| D6803    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| D6805    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| D6807    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| D6809    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| D9000    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| 09001    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| 09002    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| D9003    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| D9004    | DIODE     | RL1N4003    | 1    | 22380260T     |                 |
| 09004 or | DIODE     | GP104003E   | (1)  | 22380035T     |                 |
| D9005    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| D9006    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| D9007    | ZENER D   | MTZJ5.1B    | 1    | 224470512T    |                 |
| D9008    | DIODE     | 1SS133      | 1    | 223163T       |                 |
| D9009    | DIODE     | 1SS133      | 1    | 223163T       |                 |

| D9100 | DIODE      | 1SS133              | 1 | 223163T     |                                    |
|-------|------------|---------------------|---|-------------|------------------------------------|
| D9101 | DIODE      | 1SS133              | 1 | 223163T     |                                    |
| D9103 | DIODE      | D10XB60H            | 1 | 22380337F   |                                    |
| 09105 | DIODE      | D3SBA20             | 1 | 22380271F   |                                    |
| 09200 | DIODE      | 1SS133              | 1 | 223163T     |                                    |
| 09201 | DIODE      | D3SBA20             | 1 | 22380271F   | <dc, dd=""></dc,>                  |
| 9205  | DIODE      | D3SBA20             | 1 | 22380271F   |                                    |
| 09207 | DIODE      | 1SS133              | 1 | 223163T     |                                    |
| 9208  | DIODE      | RK16                | 1 | 22380320T   |                                    |
| .6800 | S COIL     | S-1.3C              | 1 | 231176S     |                                    |
| .6801 | S COIL     | S-1.3C              | 1 | 231176S     |                                    |
| .6802 | S COIL     | S-1.3C              | 1 | 231176S     |                                    |
| .6803 | S COIL     | S-1.3C              | 1 | 231176S     |                                    |
| .6804 | S COIL     | S-1.3C              | 1 | 231176S     |                                    |
| .6805 | S COIL     | S-1.3C              | 1 | 231176S     |                                    |
| .6806 | S COIL     | S-1.3C              | 1 | 231176S     |                                    |
| .9200 | CHOKE COIL | NCH-2541            | 1 | 231363K470A |                                    |
| 9000  | P TRANS    | NPT-1520JQ          | 1 | 2301812A    | <dc, dd,="" dt=""></dc,>           |
| 9000  | P TRANS    | NPT-1520GQ          | 1 | 2301813A    | <mp, mt,="" na906=""></mp,>        |
| 4901  | UTSP C     | CE04W25V-100M(UTSP) | 1 | 397551017T  |                                    |
| 4902  | UTSP C     | CE04W25V-100M(UTSP) | 1 | 397551017T  |                                    |
| 4903  | UTSP C     | CE04W25V-100M(UTSP) | 1 | 397551017T  |                                    |
| 4904  | UTSP C     | CE04W25V-100M(UTSP) | 1 | 397551017T  |                                    |
| 26800 | TF C       | ECQ-B50V-103J       | 1 | 374721034T  |                                    |
| C6801 | TF C       | ECQ-B50V-103J       | 1 | 374721034T  |                                    |
| 26802 | TF C       | ECQ-B50V-103J       | 1 | 374721034T  |                                    |
| 26803 | TF C       | ECQ-B50V-103J       | 1 | 374721034T  |                                    |
| C6805 | TF C       | ECQ-B50V-103J       | 1 | 374721034T  |                                    |
| C6806 | TF C       | ECQ-B50V-103J       | 1 | 374721034T  |                                    |
| C6807 | TF C       | ECQ-B50V-103J       | 1 | 374721034T  |                                    |
| 26808 | TF C       | ECQ-B50V-103J       | 1 | 374721034T  |                                    |
| 6809  | TF C       | ECQ-B50V-103J       | 1 | 374721034T  |                                    |
| 6820  | TF C       | ECQ-B50V-103J       | 1 | 374721034T  | <mp, dt,="" mt,="" na906=""></mp,> |
| 6821  | TF C       | ECQ-B50V-103J       | 1 | 374721034T  | <mp, dt,="" mt,="" na906=""></mp,> |
| 6822  | TF C       | ECQ-B50V-103J       | 1 | 374721034T  | <mp, dt,="" mt,="" na906=""></mp,> |
| 6823  | TF C       | ECQ-B50V-103J       | 1 | 374721034T  | <mp, dt,="" mt,="" na906=""></mp,> |
| 6824  | TF C       | ECQ-B50V-103J       | 1 | 374721034T  | <mp, dt,="" mt,="" na906=""></mp,> |
| 6825  | TF C       | ECQ-B50V-103J       | 1 | 374721034T  | <mp, dt,="" mt,="" na906=""></mp,> |
| C6826 | TF C       | ECQ-B50V-103J       | 1 | 374721034T  | <mp, dt,="" mt,="" na906=""></mp,> |
| C6827 | TF C       | ECQ-B50V-103J       | 1 | 374721034T  | <mp, dt,="" mt,="" na906=""></mp,> |
| C6828 | TF C       | ECQ-B50V-103J       | 1 | 374721034T  | <mp, dt,="" mt,="" na906=""></mp,> |
| 29000 | TF C       | ECQ-B50V-223J       | 1 | 374722234T  |                                    |
| C9001 | VR C       | CE04W25V-2200M(VR)  | 1 | 394652227S  | <dc, dd,="" dt=""></dc,>           |
| C9001 | VR C       | CE04W16V-2200M(VR)  | 1 | 394642227S  | <mp, mt,="" na906=""></mp,>        |
| C9002 | UTSP C     | CE04W50V-4.7M(UTSP) | 1 | 397580477T  |                                    |
| C9008 | UTSP C     | CE04W25V-100M(UTSP) | 1 | 397551017T  |                                    |
| 29102 | VR C       | CE04W25V-4700M(VR)  | 1 | 394654727S  |                                    |
| 9103  | VR C       | CE04W25V-4700M(VR)  | 1 | 394654727S  |                                    |

| C9104 | VR C       | CE04W16V-4700M(VR)  | 1 | 394644727S |                          |
|-------|------------|---------------------|---|------------|--------------------------|
| C9106 | UTSP C     | CE04W50V-1M(UTSP)   | 1 | 397580107T | <mp, dt="" mt,=""></mp,> |
| C9107 | UTSP C     | CE04W25V-220M(UTSP) | 1 | 397552217T | <mp, dt="" mt,=""></mp,> |
| C9108 | IS C       | MKP R46 224M        | 1 | 3800040S   |                          |
| C9115 | TF C       | ECQ-B50V-103J       | 1 | 374721034T |                          |
| C9116 | TF C       | ECQ-B50V-103J       | 1 | 374721034T |                          |
| C9117 | TF C       | ECQ-V50V-104J       | 1 | 374721044T |                          |
| C9118 | TF C       | ECQ-V50V-104J       | 1 | 374721044T |                          |
| C9119 | TF C       | ECQ-B50V-223J       | 1 | 374722234T |                          |
| C9201 | TF C       | ECQ-B50V-103J       | 1 | 374721034T |                          |
| C9202 | TF C       | ECQ-V50V-104J       | 1 | 374721044T | <dc, dd=""></dc,>        |
| C9203 | TF C       | ECQ-V50V-104J       | 1 | 374721044T |                          |
| 29204 | VR C       | CE04W16V-4700M(VR)  | 1 | 394644727S |                          |
| 29205 | VR C       | CE04W25V-3300M(VR)  | 1 | 394653327S | <dc, dd=""></dc,>        |
| 29206 | VR C       | CE04W16V-6800M(VR)  | 1 | 394646827S | <dc, dd=""></dc,>        |
| 29207 | UTSP C     | CE04W50V-10M(UTSP)  | 1 | 397581007T |                          |
| C9208 | UTSP C     | CE04W10V-100M(UTSP) | 1 | 397531017T |                          |
| 29211 | UTSP C     | CE04W25V-220M(UTSP) | 1 | 397552217T |                          |
| 29213 | UTSP C     | CE04W10V-470M(UTSP) | 1 | 397534717T |                          |
| 4901  | METAL R    | RNU1/2WCJ-0.22      | 1 | 453532294T |                          |
| 4902  | METAL R    | RNU1/2WCJ-0.22      | 1 | 453532294T |                          |
| 4907  | CARBON R   | R16J-330            | 1 | 417343314T |                          |
| 4908  | CARBON R   | R16J-330            | 1 | 417343314T |                          |
| R6800 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6801 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6802 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6803 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6804 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6805 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6806 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6810 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6811 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6812 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| 26813 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6814 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6815 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6816 | CARBON R   | R16J-22             | 1 | 417342204T |                          |
| R6900 | METAL O R  | RS1WBJ-15           | 1 | 443621504T |                          |
| R6901 | METAL O R  | RS1WBJ-15           | 1 | 443621504T |                          |
| R9005 | CARBON R   | R16J-27             | 1 | 417342704T |                          |
| R9100 | THERMISTOR | M3R014C             | 1 | 4000148    |                          |
| R9101 | THERMISTOR | M3R014C             | 1 | 4000148    |                          |
| R9102 | THERMISTOR | M3R014C             | 1 | 4000148    |                          |
| R9104 | CARBON R   | R16J-1K             | 1 | 417341024T |                          |
| R9105 | CARBON R   | R16J-100K           | 1 | 417341044T |                          |
| R9106 | CARBON R   | R16J-100            | 1 | 417341014T |                          |
| R9107 | CARBON R   | R16J-1K             | 1 | 417341024T |                          |
| R9108 | CARBON R   | R16J-100K           | 1 | 417341044T |                          |

| R9109  | CARBON R    | R16J-47        | 1 417344704T    | <dc, dd=""></dc,>                  |
|--------|-------------|----------------|-----------------|------------------------------------|
| R9109  | CARBON R    | R16J-100       | 1 417341014T    | <mp, dt,="" mt,="" na906=""></mp,> |
| R9112  | METAL R     | RNU1/2WCJ-0.22 | 1 453532294T    |                                    |
| R9200  | CARBON R    | R16J-1K        | 1 417341024T    |                                    |
| R9201  | CARBON R    | R16J-100K      | 1 417341044T    |                                    |
| R9202  | CARBON R    | R16J-100       | 1 417341014T    |                                    |
| R9203  | METAL R     | RNU1/2WCJ-1    | 1 453530104T    | <dc, dd=""></dc,>                  |
| R9204  | CARBON R    | R16J-100K      | 1 417341044T    |                                    |
| R9205  | CARBON R    | R16J-100K      | 1 417341044T    |                                    |
| R9206  | CARBON R    | R16J-15K       | 1 417341534T    |                                    |
| R9207  | CARBON R    | R16J-27K       | 1 417342734T    |                                    |
| R9208  | CARBON R    | R16J-820       | 1 417348214T    |                                    |
| R9209  | CARBON R    | R16J-2.7K      | 1 417342724T    |                                    |
| R9211  | METAL R     | RNU1/2WCJ-0.39 | 1 453533994T    | <dc, dd=""></dc,>                  |
| 89212  | METAL R     | RNU1/2WCJ-0.39 | 1 453533994T    | <dc, dd=""></dc,>                  |
| R9213  | METAL R     | RNU1/2WCJ-0.39 | 1 453533994T    | <dc, dd=""></dc,>                  |
| R9214  | METAL R     | RNU1/2WCJ-0.39 | 1 453533994T    | <dc, dd=""></dc,>                  |
| R9215  | CARBON R    | R16J-10K       | 1 417341034T    |                                    |
| R9216  | THERMISTOR  | RXEF030        | 1 4000195T      |                                    |
| E9000  | TRM(SCREW)  | NEJITANSI M3   | 1 25065425      | <mp, dt,="" mt,="" na906=""></mp,> |
| 9100   | TRM(SCREW)  | NEJITANSI M3   | 1 25065425      |                                    |
| 9000A  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !, <dc, dd=""></dc,>               |
| 9000B  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !, <dc, dd=""></dc,>               |
| 9000C  | LABEL       | T2.5AL250V     | 1 29361747      | !, <na906></na906>                 |
| 9100A  | FUSE HOLDER | SN5051         | 1 250113        | !, <dc, dd,="" dt=""></dc,>        |
| 9100A  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !, <mp, mt,="" na906=""></mp,>     |
| 9100B  | FUSE HOLDER | SN5051         | 1 250113        | !, <dc, dd,="" dt=""></dc,>        |
| 9100B  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !, <mp, mt,="" na906=""></mp,>     |
| 9100C  | LABEL       | T6.3AL/250V    | 1 29361681      | !, <mp, mt,="" na906=""></mp,>     |
| 9101A  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !                                  |
| 9101B  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !                                  |
| 9102A  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !                                  |
| 9102B  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !                                  |
| 9201A  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !, <dc, dd=""></dc,>               |
| 9201B  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !, <dc, dd=""></dc,>               |
| 9202A  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !, <dc, dd=""></dc,>               |
| 9202B  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !, <dc, dd=""></dc,>               |
| 9203A  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !                                  |
| 9203B  | FUSE HOL    | NSCT-1P2031    | 1 25052133T     | !                                  |
| L2601A | WIRE HOL    | NSCT-3P874     | 1 25051087      |                                    |
| L4014A | WIRE HOL    | NSCT-6P897     | 1 25051110      |                                    |
| L6808A | WIRE HOL    | NSCT-4P895     | 1 25051108      |                                    |
| L6808B | SOCKET      | NSCT-4P96      | 1 25050268      |                                    |
| L6900B | SOCKET      | NSCT-3P108     | 1 25050280      |                                    |
| L6901A | WIRE HOL    | NSCT-8P879     | 1 25051092      |                                    |
| L6901B | WIRE TRAP   | NPLG-8P591     | 1 25055629      |                                    |
| L901A  | WIRE HOL    | NSCT-7P878     | 1 25051091      |                                    |
| 25A    | SOCKET AS   | NSAS-8P1692    | 1 200B3120820UL | <dc, dd=""></dc,>                  |

| P201B      | SOCKET AS | NSAS-8P1671                            | 1   | 200C4100820UL |                                    |
|------------|-----------|--|-----|---------------|------------------------------------|
| P3101B     | SOCKET    | IMSA-9142S-24A                         | 1   | 25053234      |                                    |
| P3102B     | SOCKET    | IMSA-9142S-14A                         | 1   | 25053229      |                                    |
| P3103B     | SOCKET    | IMSA-9142S-16A                         | 1   | 25053230      |                                    |
| P4900      | RETAINER  | (JOINT)                                | 1   | 27142069      |                                    |
| P4902A     | SOCKET AS | NSAS-12P1700                           | 1   | 200G3121210UL |                                    |
| P4902B     | PLUG      | NPLG-3P117                             | 1   | 25055133      |                                    |
| P4902C     | PLUG      | NPLG-3P117                             | 1   | 25055133      |                                    |
| P6140H     | PLUG      | NPLG-7P163                             | 1   | 25055179      |                                    |
| P6240D     | PLUG      | NPLG-3P838                             | 1   | 25055882      |                                    |
| P6250E     | PLUG      | NPLG-4P839                             | 1   | 25055883      |                                    |
| P6800      | TRM       | NTM-2PDMCR399                          | 1   | 25060471      |                                    |
| P6801      | TRM       | NTM-2PDMCR399                          | 1   | 25060471      |                                    |
| P6802      | TRM       | NTM-2PDMCR399                          | 1   | 25060471      |                                    |
| P6803      | TRM       | NTM-2PDMCR399                          | 1   | 25060471      |                                    |
| P6804      | TRM       | NTM-2PDMCR399                          | 1   | 25060471      |                                    |
| P6805      | TRM       | NTM-2PDMCR399                          | 1   | 25060471      |                                    |
| P6806      | TRM       | NTM-2PDMCR399                          | 1   | 25060471      |                                    |
| P6807      | TRM       | NTM-2PDMCR399                          | 1   | 25060471      |                                    |
| P6808      | TRM       | NTM-2PDMCR399                          | 1   | 25060471      |                                    |
| P6851B     | SOCKET    | IMSA-9142S-20A                         | 1   | 25053232      | ·····                              |
| P6852B     | SOCKET    | IMSA-9142S-20A                         | 1   | 25053232      |                                    |
| P6853B     | SOCKET    | IMSA-9142S-20A                         | 1   | 25053232      |                                    |
| P9000      | AC INLET  | NPLG-2P913                             | 1   | 25055960      |                                    |
| P9001      | AC OUTLET | AC-181-UL-11V                          | 1   | 25053030      | !, <dc, dd=""></dc,>               |
| P9006      | CRIMP AS  | CRIMP AS                               | 1   | 206CC45159UL  | ., (50,55)                         |
| P9007      | CRIMP AS  | CRIMP AS                               | 1   | 206CC45150UL  |                                    |
| P9008A     | PLUG      | NPLG-2P631                             | 1   | 25055675      | <mp, dt,="" mt,="" na906=""></mp,> |
| P9100      | PLUG      | NPLG-2P632                             | 1   | 25055676      | (M, MI, DI, 10100)                 |
| P9104      | PLUG      | NPLG-6P120                             | 1   | 25055136      |                                    |
| P9200      | PLUG      | NPLG-2P632                             | 1   | 25055676      |                                    |
| P9201      | PLUG      | NPLG-5P119                             | 1   | 25055135      |                                    |
| P9300      | PLUG      | NPLG-2P632                             | 1   | 25055676      |                                    |
| RL6800     | RELAY     | NRL-2P5A-DC12-187                      | 1   | 25065685      | ·····                              |
| RL6800 or  | RELAY     | NRL-2P5A-DC12-155                      | (1) | 25065607      |                                    |
| RL6800 or  | RELAY     | NRL-2P5A-DC12-192                      | (1) | 25065702      |                                    |
| RL6801     | RELAY     | NRL-2P5A-DC12-187                      | 1   | 25065685      |                                    |
| RL6801 or  | RELAY     | NRL-2P5A-DC12-155                      | (1) | 25065607      |                                    |
| RL6801 or  | RELAY     | NRL-2P5A-DC12-192                      | (1) | 25065702      |                                    |
| RL6802     | RELAY     | NRL-2P5A-DC12-187                      | 1   | 25065685      |                                    |
| RL6802 or  | RELAY     | NRL-2P5A-DC12-155                      | (1) | 25065607      |                                    |
| RL6802 or  | RELAY     | NRL-2P5A-DC12-192                      | (1) | 25065702      |                                    |
| RL6803     | RELAY     | NRL-2P5A-DC12-197                      | 1   | 25065685      |                                    |
| RL6803 or  | RELAY     | NRL-2P5A-DC12-167                      | (1) | 25065607      |                                    |
| RL6803 or  | RELAY     | NRL-2P5A-DC12-192                      | (1) | 25065702      |                                    |
| RL6805     | RELAY     | NRL-2P5A-DC12-192                      | 1   | 25065685      |                                    |
| RL6805 or  | RELAY     | NRL-2P5A-DC12-167                      | (1) | 25065607      |                                    |
| RL6805 or  | RELAY     | NRL-2F5A-DC12-193<br>NRL-2P5A-DC12-192 | (1) | 25065702      |                                    |
| KEU0003 Of | NELA I    | NKL-2FJA-DC12-172                      | (1) | 23003702      |                                    |

| RL6806    | RELAY | NRL-2P5A-DC12-187 | 1   | 25065685 |                      |
|-----------|-------|-------------------|-----|----------|----------------------|
| RL6806 or | RELAY | NRL-2P5A-DC12-155 | (1) | 25065607 |                      |
| RL6806 or | RELAY | NRL-2P5A-DC12-192 | (1) | 25065702 |                      |
| RL6807    | RELAY | NRL-2P5A-DC12-187 | 1   | 25065685 |                      |
| RL6807 or | RELAY | NRL-2P5A-DC12-155 | (1) | 25065607 |                      |
| RL6807 or | RELAY | NRL-2P5A-DC12-192 | (1) | 25065702 |                      |
| RL6808    | RELAY | NRL-2P5A-DC12-187 | 1   | 25065685 |                      |
| RL6808 or | RELAY | NRL-2P5A-DC12-155 | (1) | 25065607 |                      |
| RL6808 or | RELAY | NRL-2P5A-DC12-192 | (1) | 25065702 |                      |
| RL6809    | RELAY | NRL-2P5A-DC12-187 | 1   | 25065685 |                      |
| RL6809 or | RELAY | NRL-2P5A-DC12-155 | (1) | 25065607 |                      |
| RL6809 or | RELAY | NRL-2P5A-DC12-192 | (1) | 25065702 |                      |
| RL9100    | RELAY | NRL-1P10A-DC9-186 | 1   | 25065683 | !                    |
| RL9101    | RELAY | NRL-1P10A-DC9-186 | 1   | 25065683 | !                    |
| RL9102    | RELAY | NRL-1P10A-DC9-186 | 1   | 25065683 | !, <dc, dd=""></dc,> |
| RL9200    | RELAY | NRL-1P5A-DC9-179  | 1   | 25065669 | !                    |

| U16 | POWER AMP PC BOARD (NAAMP-9061-1E/1F)  |
|-----|--|
| U17 | POWER AMP PC BOARD (NAAMP-9062-1E/1F)  |
| U18 | DRIVER AMP PC BOARD (NACLA-9063-1E/1F) |
| U19 | DRIVER AMP PC BOARD (NACLA-9064-1E/1F) |
| U20 | DRIVER AMP PC BOARD (NACLA-9065-1E/1F) |
| U21 | DRIVER AMP PC BOARD (NACLA-9066-1E/1F) |
| U22 | DRIVER AMP PC BOARD (NACLA-9067-1E/1F) |
| U23 | DRIVER AMP PC BOARD (NACLA-9068-1E/1F) |
| U24 | DRIVER AMP PC BOARD (NACLA-9069-1E/1F) |

| REF. NO. | PART NAME | DESCRIPTION        | Q'TY | PART NO. (SN) | REMARKS |
|----------|-----------|--------------------|------|---------------|---------|
| Q5000    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5001    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5002    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5003    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5004    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5005    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5006    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5010    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5011    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5012    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5013    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5014    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5015    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5016    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5020    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5021    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5022    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5023    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5024    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5025    | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |

| Q5026    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
|----------|-----------|--------------------|-----|------------|--|
| Q5030    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5030 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5031    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5031 or | TR        | 2SA949-Y(TPE6 F)   | (1) | 2211354T   |  |
| Q5032    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5032 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5033    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5033 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5034    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5034 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5035    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5035 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5036    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5036 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5040    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5040 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5041    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5041 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5042    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5042 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5043    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5043 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5044    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5044 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5045    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5045 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5046    | TR        | 2SA949-O(TPE6_F)   | 1   | 2211353T   |  |
| Q5046 or | TR        | 2SA949-Y(TPE6_F)   | (1) | 2211354T   |  |
| Q5050    | TR        | 2SA1360-Y          | 1   | 2202094    |  |
| Q5050 or | TR        | 2SA1360-O          | (1) | 2202093    |  |
| Q5050A   | HEAT SINK | RAD-177            | 1   | 27160517   |  |
| Q5050B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q5051    | TR        | 2SA1360-Y          | 1   | 2202094    |  |
| Q5051 or | TR        | 2SA1360-O          | (1) | 2202093    |  |
| Q5051A   | HEAT SINK | RAD-177            | 1   | 27160517   |  |
| Q5051B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q5052    | TR        | 2SA1360-Y          | 1   | 2202094    |  |
| Q5052 or | TR        | 2SA1360-O          | (1) | 2202093    |  |
| Q5052A   | HEAT SINK | RAD-177            | 1   | 27160517   |  |
| Q5052B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q5053    | TR        | 2SA1360-Y          | 1   | 2202094    |  |
| Q5053 or | TR        | 2SA1360-O          | (1) | 2202093    |  |
| Q5053A   | HEAT SINK | RAD-177            | 1   | 27160517   |  |
| Q5053B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q5054    | TR        | 2SA1360-Y          | 1   | 2202094    |  |
| Q5054 or | TR        | 2SA1360-O          | (1) | 2202093    |  |
| Q5054A   | HEAT SINK | RAD-177            | 1   | 27160517   |  |

| Q5054B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
|----------|-----------|--------------------|-----|------------|--|
| Q5055    | TR        | 2SA1360-Y          | 1   | 2202094    |  |
| Q5055 or | TR        | 2SA1360-O          | (1) | 2202093    |  |
| Q5055A   | HEAT SINK | RAD-177            | 1   | 27160517   |  |
| Q5055B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q5056    | TR        | 2SA1360-Y          | 1   | 2202094    |  |
| Q5056 or | TR        | 2SA1360-O          | (1) | 2202093    |  |
| Q5056A   | HEAT SINK | RAD-177            | 1   | 27160517   |  |
| Q5056B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q5060    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5061    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5062    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5063    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5064    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5065    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5066    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5070    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5071    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5072    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5073    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5074    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5075    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5076    | TR        | 2SC2240-BL(TPE2_F) | 1   | 2211406T   |  |
| Q5080    | TR        | 2SC3423-Y          | 1   | 2202104    |  |
| Q5080 or | TR        | 2SC3423-O          | (1) | 2202103    |  |
| Q5080B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q5081    | TR        | 2SC3423-Y          | 1   | 2202104    |  |
| Q5081 or | TR        | 2SC3423-O          | (1) | 2202103    |  |
| Q5081B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q5082    | TR        | 2SC3423-Y          | 1   | 2202104    |  |
| Q5082 or | TR        | 2SC3423-O          | (1) | 2202103    |  |
| Q5082B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q5083    | TR        | 2SC3423-Y          | 1   | 2202104    |  |
| Q5083 or | TR        | 2SC3423-O          | (1) | 2202103    |  |
| Q5083B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q5084    | TR        | 2SC3423-Y          | 1   | 2202104    |  |
| Q5084 or | TR        | 2SC3423-O          | (1) | 2202103    |  |
| Q5084B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q5085    | TR        | 2SC3423-Y          | 1   | 2202104    |  |
| Q5085 or | TR        | 2SC3423-O          | (1) | 2202103    |  |
| Q5085B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q5086    | TR        | 2SC3423-Y          | 1   | 2202104    |  |
| Q5086 or | TR        | 2SC3423-O          | (1) | 2202103    |  |
| Q5086B   | SCREW     | 3P+6FN(3BC)        | 1   | 82143006GR |  |
| Q6010    | TR        | 2SC1740S-S         | 1   | 2213285T   |  |
| Q6011    | TR        | 2SC1740S-S         | 1   | 2213285T   |  |
| Q6012    | TR        | 2SC1740S-S         | 1   | 2213285T   |  |
| Q6013    | TR        | 2SC1740S-S         | 1   | 2213285T   |  |

| Q6014                | TR       | 2SC1740S-S               | 1   | 2213285T             |  |
|----------------------|----------|--------------------------|-----|----------------------|--|
| Q6014<br>Q6015       | TR       | 2SC1740S-S               | 1   | 2213285T             |  |
| Q6016                | TR       | 2SC1740S-S               | 1   | 2213285T             |  |
| Q6020                | TR       | 2SA933S-R                | 1   | 2213354T             |  |
| Q6020 or             | TR       | 2SA933S-S                | (1) | 2213355T             |  |
| Q6020 or             | TR       | 2SA1048-GR               | (1) | 2212125T             |  |
| Q6020 or             | TR       | KTA1267-GR               | (1) | 2215995T             |  |
| Q6021                | TR       | 2SA933S-R                | 1   | 2213354T             |  |
| Q6021 or             | TR       | 2SA933S-S                | (1) | 2213355T             |  |
| Q6021 or             | TR       | 2SA1048-GR               | (1) | 2212125T             |  |
| Q6021 or             | TR       | KTA1267-GR               | (1) | 2215995T             |  |
| Q6022                | TR       | 2SA933S-R                | 1   | 2213354T             |  |
| Q6022 or             | TR       | 2SA933S-S                | (1) | 2213355T             |  |
| -                    |          |                          |     | 2212125T             |  |
| Q6022 or<br>Q6022 or | TR<br>TR | 2SA1048-GR<br>KTA1267-GR | (1) |                      |  |
|                      | TR       | 2SA933S-R                | (1) | 2215995T<br>2213354T |  |
| Q6023                |          |                          |     |                      |  |
| Q6023 or             | TR       | 2SA933S-S                | (1) | 2213355T             |  |
| Q6023 or             | TR       | 2SA1048-GR               | (1) | 2212125T             |  |
| Q6023 or             | TR       | KTA1267-GR               | (1) | 2215995T             |  |
| Q6024                | TR       | 2SA933S-R                | 1   | 2213354T             |  |
| Q6024 or             | TR       | 2SA933S-S                | (1) | 2213355T             |  |
| Q6024 or             | TR       | 2SA1048-GR               | (1) | 2212125T             |  |
| Q6024 or             | TR       | KTA1267-GR               | (1) | 2215995T             |  |
| Q6025                | TR       | 2SA933S-R                | 1   | 2213354T             |  |
| Q6025 or             | TR       | 2SA933S-S                | (1) | 2213355T             |  |
| Q6025 or             | TR       | 2SA1048-GR               | (1) | 2212125T             |  |
| Q6025 or             | TR       | KTA1267-GR               | (1) | 2215995T             |  |
| Q6026                | TR       | 2SA933S-R                | 1   | 2213354T             |  |
| Q6026 or             | TR       | 2SA933S-S                | (1) | 2213355T             |  |
| Q6026 or             | TR       | 2SA1048-GR               | (1) | 2212125T             |  |
| Q6026 or             | TR       | KTA1267-GR               | (1) | 2215995T             |  |
| Q6030                | TR       | 2SC2229-O(TPE6_F)        | 1   | 2211633T             |  |
| Q6030 or             | TR       | 2SC2229-Y(TPE6_F)        | (1) | 2211634T             |  |
| Q6031                | TR       | 2SC2229-O(TPE6_F)        | 1   | 2211633T             |  |
| Q6031 or             | TR       | 2SC2229-Y(TPE6_F)        | (1) | 2211634T             |  |
| Q6032                | TR       | 2SC2229-O(TPE6_F)        | 1   | 2211633T             |  |
| Q6032 or             | TR       | 2SC2229-Y(TPE6_F)        | (1) | 2211634T             |  |
| Q6033                | TR       | 2SC2229-O(TPE6_F)        | 1   | 2211633T             |  |
| Q6033 or             | TR       | 2SC2229-Y(TPE6_F)        | (1) | 2211634T             |  |
| Q6034                | TR       | 2SC2229-O(TPE6_F)        | 1   | 2211633T             |  |
| Q6034 or             | TR       | 2SC2229-Y(TPE6_F)        | (1) | 2211634T             |  |
| Q6035                | TR       | 2SC2229-O(TPE6_F)        | 1   | 2211633T             |  |
| Q6035 or             | TR       | 2SC2229-Y(TPE6_F)        | (1) | 2211634T             |  |
| Q6036                | TR       | 2SC2229-O(TPE6_F)        | 1   | 2211633T             |  |
| Q6036 or             | TR       | 2SC2229-Y(TPE6_F)        | (1) | 2211634T             |  |
| Q6040                | TR       | 2SA949-O(TPE6_F)         | 1   | 2211353T             |  |
| Q6040 or             | TR       | 2SA949-Y(TPE6_F)         | (1) | 2211354T             |  |
| Q6041                | TR       | 2SA949-O(TPE6_F)         | 1   | 2211353T             |  |
|                      |          |                          |     |                      |  |

| 06041             | TD        | 26 4 0 4 0 W/TDEC (F)                | (1) | 2211254T             |
|-------------------|-----------|--------------------------------------|-----|----------------------|
| Q6041 or<br>Q6042 | TR TR     | 2SA949-Y(TPE6_F)<br>2SA949-O(TPE6_F) | (1) | 2211354T<br>2211353T |
| Q6042<br>Q6042 or | TR        | ` - /                                |     |                      |
| Q6042 or<br>Q6043 | TR        | 2SA949-Y(TPE6_F)                     | (1) | 2211354T<br>2211353T |
| -                 |           | 2SA949-O(TPE6_F)                     |     |                      |
| Q6043 or          | TR        | 2SA949-Y(TPE6_F)                     | (1) | 2211354T             |
| Q6044             | TR        | 2SA949-O(TPE6_F)                     | 1   | 2211353T             |
| Q6044 or          | TR        | 2SA949-Y(TPE6_F)                     | (1) | 2211354T             |
| Q6045             | TR        | 2SA949-O(TPE6_F)                     | 1   | 2211353T             |
| Q6045 or          | TR        | 2SA949-Y(TPE6_F)                     | (1) | 2211354T             |
| Q6046             | TR        | 2SA949-O(TPE6_F)                     | 1   | 2211353T             |
| Q6046 or          | TR        | 2SA949-Y(TPE6_F)                     | (1) | 2211354T             |
| Q6070             | TR        | 2SC2631-R                            | 1   | 2214984T             |
| Q6070 or          | TR        | 2SC2631-S                            | (1) | 2214985T             |
| Q6071             | TR        | 2SC2631-R                            | 1   | 2214984T             |
| Q6071 or          | TR        | 2SC2631-S                            | (1) | 2214985T             |
| Q6072             | TR        | 2SC2631-R                            | 1   | 2214984T             |
| Q6072 or          | TR        | 2SC2631-S                            | (1) | 2214985T             |
| Q6073             | TR        | 2SC2631-R                            | 1   | 2214984T             |
| Q6073 or          | TR        | 2SC2631-S                            | (1) | 2214985T             |
| Q6074             | TR        | 2SC2631-R                            | 1   | 2214984T             |
| Q6074 or          | TR        | 2SC2631-S                            | (1) | 2214985T             |
| Q6075             | TR        | 2SC2631-R                            | 1   | 2214984T             |
| Q6075 or          | TR        | 2SC2631-S                            | (1) | 2214985T             |
| Q6076             | TR        | 2SC2631-R                            | 1   | 2214984T             |
| Q6076 or          | TR        | 2SC2631-S                            | (1) | 2214985T             |
| Q6100             | TR        | 2SA1930(ONK_Q)                       | 1   | 2203000              |
| Q6100A            | HEAT SINK | RAD-177                              | 1   | 27160517             |
| Q6100B            | SCREW     | 3P+6FN(3BC)                          | 2   | 82143006GR           |
| Q6101             | TR        | 2SA1930(ONK_Q)                       | 1   | 2203000              |
| Q6101A            | HEAT SINK | RAD-177                              | 1   | 27160517             |
| Q6101B            | SCREW     | 3P+6FN(3BC)                          | 2   | 82143006GR           |
| Q6102             | TR        | 2SA1930(ONK_Q)                       | 1   | 2203000              |
| Q6102A            | HEAT SINK | RAD-177                              | 1   | 27160517             |
| Q6102B            | SCREW     | 3P+6FN(3BC)                          | 2   | 82143006GR           |
| Q6103             | TR        | 2SA1930(ONK_Q)                       | 1   | 2203000              |
| Q6103A            | HEAT SINK | RAD-177                              | 1   | 27160517             |
| Q6103B            | SCREW     | 3P+6FN(3BC)                          | 2   | 82143006GR           |
| Q6104             | TR        | 2SA1930(ONK_Q)                       | 1   | 2203000              |
| Q6104A            | HEAT SINK | RAD-177                              | 1   | 27160517             |
| Q6104B            | SCREW     | 3P+6FN(3BC)                          | 2   | 82143006GR           |
| Q6105             | TR        | 2SA1930(ONK_Q)                       | 1   | 2203000              |
| Q6105A            | HEAT SINK | RAD-177                              | 1   | 27160517             |
| Q6105B            | SCREW     | 3P+6FN(3BC)                          | 2   | 82143006GR           |
| Q6106             | TR        | 2SA1930(ONK_Q)                       | 1   | 2203000              |
| Q6106A            | HEAT SINK | RAD-177                              | 1   | 27160517             |
| Q6106B            | SCREW     | 3P+6FN(3BC)                          | 2   | 82143006GR           |
| Q6110             | TR        | 2SC5171(ONK_Q)                       | 1   | 2203010              |
| Q6110<br>Q6111    | TR        | 2SC5171(ONK_Q) 2SC5171(ONK_Q)        | 1   | 2203010              |
| A0111             | 111       | 2000171(011K_Q)                      | 1   | 2203010              |

| Q6112          | TR      | 2SC5171(ONK_Q)                   | 1 | 2203010                  |
|----------------|---------|----------------------------------|---|--------------------------|
| Q6112<br>Q6113 | TR      | 2SC5171(ONK_Q)<br>2SC5171(ONK_Q) | 1 | 2203010                  |
| Q6113<br>Q6114 | TR      | 2SC5171(ONK_Q)<br>2SC5171(ONK_Q) | 1 | 2203010                  |
| Q6114<br>Q6115 | TR      |                                  |   | 2203010                  |
|                | TR      | 2SC5171(ONK_Q)                   | 1 | 2203010                  |
| Q6116          |         | 2SC5171(ONK_Q)                   | 1 |                          |
| D5000          | ZENER D | MTZJ5.6B                         | 1 | 224470562T               |
| D5001          | ZENER D | MTZJ5.6B                         | 1 | 224470562T               |
| D5002          | ZENER D | MTZJ5.6B                         | 1 | 224470562T               |
| D5003          | ZENER D | MTZJ5.6B                         | 1 | 224470562T               |
| D5004          | ZENER D | MTZJ5.6B                         | 1 | 224470562T               |
| D5005          | ZENER D | MTZJ5.6B                         | 1 | 224470562T               |
| D5006          | ZENER D | MTZJ5.6B                         | 1 | 224470562T               |
| D6000          | DIODE   | 1SS133                           | 1 | 223163T                  |
| D6001          | DIODE   | 1SS133                           | 1 | 223163T                  |
| D6002          | DIODE   | 1SS133                           | 1 | 223163T                  |
| D6003          | DIODE   | 1SS133                           | 1 | 223163T                  |
| D6004          | DIODE   | 1SS133                           | 1 | 223163T                  |
| D6005          | DIODE   | 1SS133                           | 1 | 223163T                  |
| D6006          | DIODE   | 1SS133                           | 1 | 223163T                  |
| L6000          | FR CORE | *                                | 1 | 5597-45502               |
| L6001          | FR CORE | *                                | 1 | 5597-45502               |
| L6002          | FR CORE | *                                | 1 | 5597-45502               |
| L6003          | FR CORE | *                                | 1 | 5597-45502               |
| L6004          | FR CORE | *                                | 1 | 5597-45502               |
| L6005          | FR CORE | *                                | 1 | 5597-45502               |
| L6006          | FR CORE | *                                | 1 | 5597-45502               |
| L6010          | FR CORE | *                                | 1 | 5597-45502               |
| L6011          | FR CORE | *                                | 1 | 5597-45502               |
| L6012          | FR CORE | *                                | 1 | 5597-45502               |
| L6013          | FR CORE | *                                | 1 | 5597-45502               |
| L6014          | FR CORE | *                                | 1 | 5597-45502               |
| L6015          | FR CORE | *                                | 1 | 5597-45502               |
| L6016          | FR CORE | *                                | 1 | 5597-45502               |
| C5010          | UTSJ C  | CE04W25V-47M(UTSJ)               | 1 | 398054707T               |
| C5011          | UTSJ C  | CE04W25V-47M(UTSJ)               | 1 | 398054707T               |
| C5012          | UTSJ C  | CE04W25V-47M(UTSJ)               | 1 | 398054707T               |
| C5013          | UTSJ C  | CE04W25V-47M(UTSJ)               | 1 | 398054707T               |
| C5014          | UTSJ C  | CE04W25V-47M(UTSJ)               | 1 | 398054707T               |
| C5015          | UTSJ C  | CE04W25V-47M(UTSJ)               | 1 | 398054707T               |
| C5016          | UTSJ C  | CE04W25V-47M(UTSJ)               | 1 | 398054707T               |
| C5020          | TF C    | ECQ-B50V-471J                    | 1 | 374724714T               |
| C5020          | TF C    | ECQ-B50V-471J                    | 1 | 374724714T               |
| C5022          | TF C    | ECQ-B50V-471J                    | 1 | 374724714T               |
| C5022          | TF C    | ECQ-B50V-471J                    | 1 | 374724714T               |
| C5024          | TF C    | ECQ-B50V-471J<br>ECQ-B50V-471J   | 1 | 374724714T<br>374724714T |
| C5025          | TF C    | ECQ-B50V-471J<br>ECQ-B50V-471J   | 1 | 374724714T               |
| C5025          | TF C    | ECQ-B50V-471J                    | 1 | 374724714T<br>374724714T |
| C5026          | UTSP C  | CE04W25V-220M(UTSP)              | 1 | 397552217T               |
| C3040          | UISEC   | CE04 W 23 V - 220M(U I SP)       | 1 | 3713344111               |

| G504: | LITTOR C | CEO MIASTI AND MITTERS |    | 2075522177 |
|-------|----------|------------------------|----|------------|
| C5041 | UTSP C   | CE04W25V-220M(UTSP)    | 11 | 397552217T |
| C5042 | UTSP C   | CE04W25V-220M(UTSP)    | 11 | 397552217T |
| C5043 | UTSP C   | CE04W25V-220M(UTSP)    | 1  | 397552217T |
| C5044 | UTSP C   | CE04W25V-220M(UTSP)    | 1  | 397552217T |
| C5045 | UTSP C   | CE04W25V-220M(UTSP)    | 1  | 397552217T |
| C5046 | UTSP C   | CE04W25V-220M(UTSP)    | 1  | 397552217T |
| C5050 | UTSP C   | CE04W50V-10M(UTSP)     | 1  | 397581007T |
| C5051 | UTSP C   | CE04W50V-10M(UTSP)     | 1  | 397581007T |
| C5052 | UTSP C   | CE04W50V-10M(UTSP)     | 1  | 397581007T |
| C5053 | UTSP C   | CE04W50V-10M(UTSP)     | 1  | 397581007T |
| C5054 | UTSP C   | CE04W50V-10M(UTSP)     | 1  | 397581007T |
| C5055 | UTSP C   | CE04W50V-10M(UTSP)     | 1  | 397581007T |
| C5056 | UTSP C   | CE04W50V-10M(UTSP)     | 1  | 397581007T |
| C5070 | VXC      | CE04W100V-10M(VX_BLK)  | 1  | 397391007T |
| C5071 | VX C     | CE04W100V-10M(VX_BLK)  | 1  | 397391007T |
| C5072 | VX C     | CE04W100V-10M(VX_BLK)  | 1  | 397391007T |
| C5073 | VX C     | CE04W100V-10M(VX_BLK)  | 1  | 397391007T |
| C5074 | VX C     | CE04W100V-10M(VX_BLK)  | 1  | 397391007T |
| C5075 | VX C     | CE04W100V-10M(VX_BLK)  | 1  | 397391007T |
| C5076 | VX C     | CE04W100V-10M(VX_BLK)  | 1  | 397391007T |
| C5080 | VX C     | CE04W63V-22M(VX_BLK)   | 1  | 397372207T |
| C5081 | VX C     | CE04W63V-22M(VX_BLK)   | 1  | 397372207T |
| C5082 | VX C     | CE04W63V-22M(VX_BLK)   | 1  | 397372207T |
| C5083 | VX C     | CE04W63V-22M(VX_BLK)   | 1  | 397372207T |
| C5084 | VX C     | CE04W63V-22M(VX_BLK)   | 1  | 397372207T |
| C5085 | VX C     | CE04W63V-22M(VX_BLK)   | 1  | 397372207T |
| C5086 | VX C     | CE04W63V-22M(VX_BLK)   | 1  | 397372207T |
| C5100 | TF C     | ECQ-B50V-101K          | 1  | 374721015T |
| C5101 | TF C     | ECQ-B50V-101K          | 1  | 374721015T |
| C5102 | TF C     | ECQ-B50V-101K          | 1  | 374721015T |
| C5103 | TF C     | ECQ-B50V-101K          | 1  | 374721015T |
| C5104 | TF C     | ECQ-B50V-101K          | 1  | 374721015T |
| C5105 | TF C     | ECQ-B50V-101K          | 1  | 374721015T |
| C5106 | TF C     | ECQ-B50V-101K          | 1  | 374721015T |
| C5110 | CERA C   | CC45CH50V-010C         | 1  | 345340101T |
| C5111 | CERA C   | CC45CH50V-010C         | 1  | 345340101T |
| C5112 | CERA C   | CC45CH50V-010C         | 1  | 345340101T |
| C5113 | CERA C   | CC45CH50V-010C         | 1  | 345340101T |
| C5114 | CERA C   | CC45CH50V-010C         | 1  | 345340101T |
| C5115 | CERA C   | CC45CH50V-010C         | 1  | 345340101T |
| C5116 | CERA C   | CC45CH50V-010C         | 1  | 345340101T |
| C5120 | VR C     | CE04W100V-100M(VR)     | 1  | 394691017S |
| C5121 | VR C     | CE04W100V-100M(VR)     | 1  | 394691017S |
| C5122 | VR C     | CE04W100V-100M(VR)     | 1  | 394691017S |
| C5123 | VR C     | CE04W100V-100M(VR)     | 1  | 394691017S |
| C5124 | VR C     | CE04W100V-100M(VR)     | 1  | 394691017S |
| C5125 | VR C     | CE04W100V-100M(VR)     | 1  | 394691017S |
| C5126 | VR C     | CE04W100V-100M(VR)     | 1  | 394691017S |
|       |          |                        |    |            |

| C5130 | VR C     | CE04W100V-100M(VR) | 1 | 394691017S |
|-------|----------|--------------------|---|------------|
| C5131 | VR C     | CE04W100V-100M(VR) | 1 | 394691017S |
| C5132 | VR C     | CE04W100V-100M(VR) | 1 | 394691017S |
| C5133 | VR C     | CE04W100V-100M(VR) | 1 | 394691017S |
| C5134 | VR C     | CE04W100V-100M(VR) | 1 | 394691017S |
| C5135 | VR C     | CE04W100V-100M(VR) | 1 | 394691017S |
| C5136 | VR C     | CE04W100V-100M(VR) | 1 | 394691017S |
| C6000 | TF C     | ECQ-B50V-102J      | 1 | 374721024T |
| C6001 | TF C     | ECQ-B50V-102J      | 1 | 374721024T |
| C6002 | TF C     | ECQ-B50V-102J      | 1 | 374721024T |
| C6003 | TF C     | ECQ-B50V-102J      | 1 | 374721024T |
| C6004 | TF C     | ECQ-B50V-102J      | 1 | 374721024T |
| C6005 | TF C     | ECQ-B50V-102J      | 1 | 374721024T |
| C6006 | TF C     | ECQ-B50V-102J      | 1 | 374721024T |
| C6010 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6011 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6012 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6013 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6014 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6015 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6016 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6020 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6021 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6022 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6023 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6024 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6025 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6026 | UTSP C   | CE04W50V 47M(UTSP) | 1 | 397584707T |
| C6040 | TF C     | ECQ-B50V-223J      | 1 | 374722234T |
| C6041 | TF C     | ECQ-B50V-223J      | 1 | 374722234T |
| C6042 | TF C     | ECQ-B50V-223J      | 1 | 374722234T |
| C6043 | TF C     | ECQ-B50V-223J      | 1 | 374722234T |
| C6044 | TF C     | ECQ-B50V-223J      | 1 | 374722234T |
| C6045 | TF C     | ECQ-B50V-223J      | 1 | 374722234T |
| C6046 | TF C     | ECQ-B50V-223J      | 1 | 374722234T |
| R5000 | CARBON R | R16J-1K            | 1 | 417341024T |
| R5001 | CARBON R | R16J-1K            | 1 | 417341024T |
| R5002 | CARBON R | R16J-1K            | 1 | 417341024T |
| R5003 | CARBON R | R16J-1K            | 1 | 417341024T |
| R5004 | CARBON R | R16J-1K            | 1 | 417341024T |
| R5005 | CARBON R | R16J-1K            | 1 | 417341024T |
| R5006 | CARBON R | R16J-1K            | 1 | 417341024T |
| R5010 | CARBON R | R16J-56K           | 1 | 417345634T |
| R5011 | CARBON R | R16J-56K           | 1 | 417345634T |
| R5012 | CARBON R | R16J-56K           | 1 | 417345634T |
| R5013 | CARBON R | R16J-56K           | 1 | 417345634T |
| R5014 | CARBON R | R16J-56K           | 1 | 417345634T |
| R5015 | CARBON R | R16J-56K           | 1 | 417345634T |
|       |          |                    | - |            |

| CARRON R | R161-56K   | 1  | 417345634T  |   |
|----------|--|--|---|---|
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
| CARBON R | R16J-330   | 1  | 417343314T  |   |
| CARBON R | R16J-330   | 1  | 417343314T  |   |
| CARBON R | R16J-330   | 1  | 417343314T  |   |
| CARBON R | R16J-330   | 1  | 417343314T  |   |
| CARBON R | R16J-330   | 1  | 417343314T  |   |
| CARBON R | R16J-330   | 1  | 417343314T  |   |
| CARBON R | R16J-330   | 1  | 417343314T  |   |
| CARBON R | R16J-5.6K  | 1  | 417345624T  |   |
| CARBON R | R16J-5.6K  | 1  | 417345624T  |   |
| CARBON R | R16J-5.6K  | 1  | 417345624T  |   |
| CARBON R | R16J-5.6K  | 1  | 417345624T  |   |
| CARBON R | R16J-5.6K  | 1  | 417345624T  |   |
| CARBON R | R16J-5.6K  | 1  | 417345624T  |   |
| CARBON R | R16J-5.6K  | 1  | 417345624T  |   |
| CARBON R | R16J-2.7K  | 1  | 417342724T  |   |
| CARBON R | R16J-2.7K  | 1  | 417342724T  |   |
| CARBON R | R16J-2.7K  | 1  | 417342724T  |   |
| CARBON R | R16J-2.7K  | 1  | 417342724T  |   |
| CARBON R | R16J-2.7K  | 1  | 417342724T  |   |
| CARBON R | R16J-2.7K  | 1  | 417342724T  |   |
|          |  | 1  |   |   |
|          |  | 1  |   |   |
|          |  | 1  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
|          |  |  |   |   |
| CARBON R | K16J-1.8K  | 1  | 41/3418241  |   |
|          | CARBON R | CARBON R         R16J-330           CARBON R         R16J-5.6K           CARBON R         R16J-5.6K           CARBON R         R16J-5.6K           CARBON R         R16J-5 | CARBON R         R16J-330         1           CARBON R         R16J-330 | CARBON R R16J-330 1 417343314T CARBON R R16J-350 1 41734524T CARBON R R16J-5.6K 1 41734504T CARBON R R16J-5.0K 1 41734104T CARBON R R16J-1.00K 1 41734104T |

| D5005          | CARRON B             | D161 1 0V              | 1        | 417241924T               |  |
|----------------|----------------------|------------------------|----------|--------------------------|--|
| R5095<br>R5096 | CARBON R<br>CARBON R | R16J-1.8K<br>R16J-1.8K | 1        | 417341824T<br>417341824T |  |
| R5110          | CARBON R CARBON R    | R16J-1.8K<br>R16J-2.2K | 1        | 4173418241<br>417342224T |  |
|                | CARBON R CARBON R    |                        |          | 417342224T               |  |
| R5111<br>R5112 |                      | R16J-2.2K              | <u> </u> |                          |  |
|                | CARBON R             | R16J-2.2K              |          | 417342224T               |  |
| R5113          | CARBON R             | R16J-2.2K              | 1        | 417342224T               |  |
| R5114          | CARBON R             | R16J-2.2K              | 1        | 417342224T               |  |
| R5115          | CARBON R             | R16J-2.2K              | 1        | 417342224T               |  |
| R5116          | CARBON R             | R16J-2.2K              | 1        | 417342224T               |  |
| R5120<br>R5121 | CARBON R             | R16J-2.2K<br>R16J-2.2K | 1        | 417342224T<br>417342224T |  |
| R5121          | CARBON R             |                        | 1        |                          |  |
|                | CARBON R             | R16J-2.2K              |          | 417342224T               |  |
| R5123          | CARBON R             | R16J-2.2K              | 1        | 417342224T               |  |
| R5124          | CARBON R             | R16J-2.2K              | 1        | 417342224T               |  |
| R5125          | CARBON R             | R16J-2.2K              | 1        | 417342224T               |  |
| R5126          | CARBON R             | R16J-2.2K              | 1        | 417342224T               |  |
| R5130          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5131          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5132          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5133          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5134          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5135          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5136          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5140          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5141          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5142          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5143          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5144          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5145          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5146          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5150          | METAL O R            | RS1/2WBJ-10K           | 1        | 443521034T               |  |
| R5151          | METAL O R            | RS1/2WBJ-10K           | 1        | 443521034T               |  |
| R5152          | METAL O R            | RS1/2WBJ-10K           | 1        | 443521034T               |  |
| R5153          | METAL O R            | RS1/2WBJ-10K           | 1        | 443521034T               |  |
| R5154          | METAL O R            | RS1/2WBJ-10K           | 1        | 443521034T               |  |
| R5155          | METAL O R            | RS1/2WBJ-10K           | 1        | 443521034T               |  |
| R5156          | METAL O R            | RS1/2WBJ-10K           | 1        | 443521034T               |  |
| R5160          | NF CARBON R          | R25J-1.0K              | 1        | 415471024T               |  |
| R5161          | NF CARBON R          | R25J-1.0K              | 1        | 415471024T               |  |
| R5162          | NF CARBON R          | R25J-1.0K              | 1        | 415471024T               |  |
| R5163          | NF CARBON R          | R25J-1.0K              | 1        | 415471024T               |  |
| R5164          | NF CARBON R          | R25J-1.0K              | 1        | 415471024T               |  |
| R5165          | NF CARBON R          | R25J-1.0K              | 1        | 415471024T               |  |
| R5166          | NF CARBON R          | R25J-1.0K              | 1        | 415471024T               |  |
| R5170          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5171          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5172          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
| R5173          | NF CARBON R          | R25J-820               | 1        | 415478214T               |  |
|                |                      |                        |          |                          |  |

| R5174 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
|-------|-------------|-----------|---|------------|--|
| R5174 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5176 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5180 | NF CARBON R | R25J-820  | 1 | 415473304T |  |
| R5181 | NF CARBON R | R25J-33   | 1 | 415473304T |  |
| R5182 | NF CARBON R | R25J-33   | 1 | 415473304T |  |
| R5183 | NF CARBON R | R25J-33   | 1 | 415473304T |  |
| R5184 | NF CARBON R | R25J-33   | 1 | 415473304T |  |
| R5185 | NF CARBON R | R25J-33   | 1 | 415473304T |  |
| R5186 | NF CARBON R | R25J-33   | 1 | 415473304T |  |
| R5210 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5211 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5212 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5213 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5214 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5215 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5216 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5220 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5221 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5222 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5223 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5224 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5225 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5226 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5230 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5231 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5232 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5233 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5234 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5235 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5236 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5240 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5241 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5242 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5243 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5244 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5245 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5246 | NF CARBON R | R25J-15   | 1 | 415471504T |  |
| R5250 | CARBON R    | R16J-68K  | 1 | 417346834T |  |
| R5251 | CARBON R    | R16J-68K  | 1 | 417346834T |  |
| R5252 | CARBON R    | R16J-68K  | 1 | 417346834T |  |
| R5253 | CARBON R    | R16J-68K  | 1 | 417346834T |  |
| R5254 | CARBON R    | R16J-68K  | 1 | 417346834T |  |
| R5255 | CARBON R    | R16J-68K  | 1 | 417346834T |  |
| R5256 | CARBON R    | R16J-68K  | 1 | 417346834T |  |
| R5260 | CARBON R    | R16J-270K | 1 | 417342744T |  |
| R5261 | CARBON R    | R16J-270K | 1 | 417342744T |  |
| R5262 | CARBON R    | R16J-270K | 1 | 417342744T |  |
|       |             |           |   |            |  |

| R5263          | CARBON R    | R16J-270K                    | 1 | 417342744T               |  |
|----------------|-------------|------------------------------|---|--------------------------|--|
| R5264          | CARBON R    | R16J-270K                    | 1 | 417342744T               |  |
| R5265          | CARBON R    | R16J-270K                    | 1 | 417342744T               |  |
| R5266          | CARBON R    | R16J-270K                    | 1 | 417342744T               |  |
| R5280          | METAL O R   | RS1/2WBJ-10K                 | 1 | 443521034T               |  |
| R5281          | METAL O R   | RS1/2WBJ-10K<br>RS1/2WBJ-10K | 1 | 443521034T               |  |
| R5281          | METAL O R   | RS1/2WBJ-10K<br>RS1/2WBJ-10K | 1 | 443521034T<br>443521034T |  |
| R5283          | METAL O R   | RS1/2WBJ-10K<br>RS1/2WBJ-10K | 1 | 443521034T<br>443521034T |  |
| R5284          | METAL O R   | RS1/2WBJ-10K<br>RS1/2WBJ-10K | 1 | 443521034T               |  |
| R5285          | METAL O R   | RS1/2WBJ-10K<br>RS1/2WBJ-10K | 1 | 443521034T<br>443521034T |  |
| R5286          | METAL O R   | RS1/2WBJ-10K<br>RS1/2WBJ-10K | 1 | 443521034T               |  |
| R5290          | CARBON R    | R16J-100K                    | 1 | 417341044T               |  |
| R5290          | CARBON R    | R16J-100K<br>R16J-100K       | 1 | 417341044T               |  |
|                |             |                              | 1 |                          |  |
| R5292<br>R5293 | CARBON R    | R16J-100K                    | 1 | 417341044T               |  |
| R5293          | CARBON R    | R16J-100K                    |   | 417341044T               |  |
|                | CARBON R    | R16J-100K                    | 1 | 417341044T               |  |
| R5295          | CARBON R    | R16J-100K                    | 1 | 417341044T               |  |
| R5296          | CARBON R    | R16J-100K                    | 1 | 417341044T               |  |
| R5300          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5301          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5302          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5303          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5304          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5305          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5306          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5330          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5331          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5332          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5333          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5334          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5335          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5336          | NF CARBON R | R25J-82                      | 1 | 415478204T               |  |
| R5360          | CARBON R    | R16J-120K                    | 1 | 417341244T               |  |
| R5361          | CARBON R    | R16J-120K                    | 1 | 417341244T               |  |
| R5362          | CARBON R    | R16J-120K                    | 1 | 417341244T               |  |
| R5363          | CARBON R    | R16J-120K                    | 1 | 417341244T               |  |
| R5364          | CARBON R    | R16J-120K                    | 1 | 417341244T               |  |
| R5365          | CARBON R    | R16J-120K                    | 1 | 417341244T               |  |
| R5366          | CARBON R    | R16J-120K                    | 1 | 417341244T               |  |
| R5370          | CARBON R    | R16J-560K                    | 1 | 417345644T               |  |
| R5371          | CARBON R    | R16J-560K                    | 1 | 417345644T               |  |
| R5372          | CARBON R    | R16J-560K                    | 1 | 417345644T               |  |
| R5373          | CARBON R    | R16J-560K                    | 1 | 417345644T               |  |
| R5374          | CARBON R    | R16J-560K                    | 1 | 417345644T               |  |
| R5375          | CARBON R    | R16J-560K                    | 1 | 417345644T               |  |
| R5376          | CARBON R    | R16J-560K                    | 1 | 417345644T               |  |
| R6010          | CARBON R    | R16J-4.7K                    | 1 | 417344724T               |  |
| R6011          | CARBON R    | R16J-4.7K                    | 1 | 417344724T               |  |
|                |             |                              |   |                          |  |

| D6012          | CADDON D             | D161 4 7V              | 1 | 417344724T               |   |
|----------------|----------------------|------------------------|---|--------------------------|---|
| R6012<br>R6013 | CARBON R<br>CARBON R | R16J-4.7K<br>R16J-4.7K | 1 | 417344724T<br>417344724T | *************************************** |
| R6014          | CARBON R CARBON R    | R16J-4.7K<br>R16J-4.7K | 1 | 417344724T<br>417344724T | · · · · · · · · · · · · · · · · · · ·   |
| R6015          | CARBON R             | R16J-4.7K<br>R16J-4.7K | 1 | 417344724T               |   |
| R6016          |                      |                        | 1 |                          |   |
|                | CARBON R             | R16J-4.7K              |   | 417344724T               |   |
| R6020          | CARBON R             | R16J-3.3K              | 1 | 417343324T               |   |
| R6021          | CARBON R             | R16J-3.3K              | 1 | 417343324T               |   |
| R6022          | CARBON R             | R16J-3.3K              | 1 | 417343324T               |   |
| R6023<br>R6024 | CARBON R<br>CARBON R | R16J-3.3K<br>R16J-3.3K | 1 | 417343324T<br>417343324T |   |
| R6025          | CARBON R             | R16J-3.3K              | 1 | 417343324T               |   |
| R6026          | CARBON R             | R16J-3.3K<br>R16J-3.3K | 1 | 417343324T<br>417343324T |   |
| R6030          | CARBON R             |                        | 1 | 417341824T               |   |
|                |                      | R16J-1.8K              |   |                          |   |
| R6031          | CARBON R             | R16J-1.8K              | 1 | 417341824T               |   |
| R6032          | CARBON R             | R16J-1.8K              |   | 417341824T               |   |
| R6033          | CARBON R             | R16J-1.8K              | 1 | 417341824T               |   |
| R6034          | CARBON R             | R16J-1.8K              | 1 | 417341824T               |   |
| R6035          | CARBON R             | R16J-1.8K              | 1 | 417341824T               |   |
| R6036          | CARBON R             | R16J-1.8K              | 1 | 417341824T               |   |
| R6040          | TRIM R               | N06HR1KBB              | 1 | 5211401T                 |   |
| R6041          | TRIM R               | N06HR1KBB              | 1 | 5211401T                 |   |
| R6042          | TRIM R               | N06HR1KBB              | 1 | 5211401T                 |   |
| R6043          | TRIM R               | N06HR1KBB              | 1 | 5211401T                 |   |
| R6044          | TRIM R               | N06HR1KBB              | 1 | 5211401T                 |   |
| R6045          | TRIM R               | N06HR1KBB              | 1 | 5211401T                 |   |
| R6046          | TRIM R               | N06HR1KBB              | 1 | 5211401T                 |   |
| R6050          | CARBON R             | R16J-2.7K              | 1 | 417342724T               |   |
| R6051          | CARBON R             | R16J-2.7K              | 1 | 417342724T               |   |
| R6052          | CARBON R             | R16J-2.7K              | 1 | 417342724T               |   |
| R6053          | CARBON R             | R16J-2.7K              | 1 | 417342724T               |   |
| R6054          | CARBON R             | R16J-2.7K              | 1 | 417342724T               |   |
| R6055          | CARBON R             | R16J-2.7K              | 1 | 417342724T               |   |
| R6056          | CARBON R             | R16J-2.7K              | 1 | 417342724T               |   |
| R6060          | NF CARBON R          | R25J-120               | 1 | 415471214T               |   |
| R6061          | NF CARBON R          | R25J-120               | 1 | 415471214T               |   |
| R6062          | NF CARBON R          | R25J-120               | 1 | 415471214T               |   |
| R6063          | NF CARBON R          | R25J-120               | 1 | 415471214T               |   |
| R6064          | NF CARBON R          | R25J-120               | 1 | 415471214T               |   |
| R6065          | NF CARBON R          | R25J-120               | 1 | 415471214T               |   |
| R6066          | NF CARBON R          | R25J-120               | 1 | 415471214T               |   |
| R6070          | NF CARBON R          | R25J-82                | 1 | 415478204T               |   |
| R6071          | NF CARBON R          | R25J-82                | 1 | 415478204T               |   |
| R6072          | NF CARBON R          | R25J-82                | 1 | 415478204T               |   |
| R6073          | NF CARBON R          | R25J-82                | 1 | 415478204T               |   |
| R6074          | NF CARBON R          | R25J-82                | 1 | 415478204T               |   |
| R6075          | NF CARBON R          | R25J-82                | 1 | 415478204T               |   |
| R6076          | NF CARBON R          | R25J-82                | 1 | 415478204T               |   |
| R6080          | METAL O R            | RS1/2WBJ-10            | 1 | 443521004T               |   |
|                |                      |                        |   |                          |   |

| D C 0 0 1      | METALOR     | DC1/OWDI 10 | 1 | 442521004T |          |
|----------------|-------------|-------------|---|------------|----------|
| R6081          | METAL O R   | RS1/2WBJ-10 | 1 | 443521004T |          |
| R6082<br>R6083 | METAL O R   | RS1/2WBJ-10 | 1 | 443521004T |          |
|                | METAL O R   | RS1/2WBJ-10 |   | 443521004T | <u> </u> |
| R6084          | METAL O R   | RS1/2WBJ-10 | 1 | 443521004T |          |
| R6085          | METAL O R   | RS1/2WBJ-10 | 1 | 443521004T |          |
| R6086          | METAL O R   | RS1/2WBJ-10 | 1 | 443521004T |          |
| R6090          | METAL O R   | RS1/2WBJ-10 | 1 | 443521004T |          |
| R6091          | METAL O R   | RS1/2WBJ-10 | 1 | 443521004T |          |
| R6092          | METAL O R   | RS1/2WBJ-10 | 1 | 443521004T |          |
| R6093          | METAL O R   | RS1/2WBJ-10 | 1 | 443521004T |          |
| R6094          | METAL O R   | RS1/2WBJ-10 | 1 | 443521004T |          |
| R6095          | METAL O R   | RS1/2WBJ-10 | 1 | 443521004T |          |
| R6096          | METAL O R   | RS1/2WBJ-10 | 1 | 443521004T |          |
| R6110          | CARBON R    | R16J-10K    | 1 | 417341034T |          |
| R6111          | CARBON R    | R16J-10K    | 1 | 417341034T |          |
| R6112          | CARBON R    | R16J-10K    | 1 | 417341034T |          |
| R6113          | CARBON R    | R16J-10K    | 1 | 417341034T |          |
| R6114          | CARBON R    | R16J-10K    | 1 | 417341034T |          |
| R6115          | CARBON R    | R16J-10K    | 1 | 417341034T |          |
| R6116          | CARBON R    | R16J-10K    | 1 | 417341034T |          |
| R6150          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6151          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6152          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6153          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6154          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6155          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6156          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6160          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6161          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6162          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6163          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6164          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6165          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6166          | NF CARBON R | R25J-100    | 1 | 415471014T |          |
| R6170          | CARBON R    | R16J-33K    | 1 | 417343334T |          |
| R6171          | CARBON R    | R16J-33K    | 1 | 417343334T |          |
| R6172          | CARBON R    | R16J-33K    | 1 | 417343334T |          |
| R6173          | CARBON R    | R16J-33K    | 1 | 417343334T |          |
| R6174          | CARBON R    | R16J-33K    | 1 | 417343334T |          |
| R6175          | CARBON R    | R16J-33K    | 1 | 417343334T |          |
| R6176          | CARBON R    | R16J-33K    | 1 | 417343334T |          |
| R6180          | CARBON R    | R16J-15K    | 1 | 417341534T |          |
| R6181          | CARBON R    | R16J-15K    | 1 | 417341534T |          |
| R6182          | CARBON R    | R16J-15K    | 1 | 417341534T |          |
| R6183          | CARBON R    | R16J-15K    | 1 | 417341534T |          |
| R6184          | CARBON R    | R16J-15K    | 1 | 417341534T |          |
| R6185          | CARBON R    | R16J-15K    | 1 | 417341534T |          |
| R6186          | CARBON R    | R16J-15K    | 1 | 417341534T |          |
|                |             | 11100 1011  | 1 |            |          |

| R6190 | CARBON R          | R16J-5.6K | 1                                       | 417345624T               |  |
|-------|-------------------|-----------|---|--------------------------|--|
| R6191 | CARBON R          | R16J-5.6K | 1                                       | 417345624T               |  |
| R6192 | CARBON R          | R16J-5.6K | 1                                       | 417345624T               |  |
| R6193 | CARBON R          | R16J-5.6K | 1                                       | 417345624T               |  |
| R6194 | CARBON R          | R16J-5.6K | 1                                       | 417345624T               |  |
| R6195 | CARBON R          | R16J-5.6K | 1                                       | 417345624T               |  |
| R6196 | CARBON R          | R16J-5.6K | 1                                       | 417345624T               |  |
| R6210 | CARBON R          | R16J-47K  | 1                                       | 4173430241<br>417344734T |  |
| R6211 | CARBON R          | R16J-47K  | 1                                       | 417344734T               |  |
| R6212 | CARBON R          | R16J-47K  | 1                                       | 417344734T<br>417344734T |  |
| R6212 | CARBON R CARBON R | R16J-47K  | 1                                       | 417344734T               |  |
| R6214 | CARBON R          | R16J-47K  | 1                                       | 417344734T               |  |
|       | CARBON R          | R16J-47K  | 1                                       | 417344734T               |  |
| R6215 |                   |           |   |                          |  |
| R6216 | CARBON R          | R16J-47K  | 1                                       | 417344734T               |  |
| R6230 | CARBON R          | R16J-47K  |   | 417344734T               |  |
| R6231 | CARBON R          | R16J-47K  | 1                                       | 417344734T               |  |
| R6232 | CARBON R          | R16J-47K  | 1                                       | 417344734T               |  |
| R6233 | CARBON R          | R16J-47K  | 1                                       | 417344734T               |  |
| R6234 | CARBON R          | R16J-47K  | 1                                       | 417344734T               |  |
| R6235 | CARBON R          | R16J-47K  | 1                                       | 417344734T               |  |
| R6236 | CARBON R          | R16J-47K  | 1                                       | 417344734T               |  |
| R6250 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6251 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6252 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6253 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6254 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6255 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6256 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6260 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6261 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6262 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6263 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6264 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6265 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6266 | NF CARBON R       | R25J-120  | 1                                       | 415471214T               |  |
| R6270 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
| R6271 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
| R6272 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
| R6273 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
| R6274 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
| R6275 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
| R6276 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
| R6280 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
| R6281 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
| R6282 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
| R6283 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
| R6284 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
| R6285 | NF CARBON R       | R25J-18   | 1                                       | 415471804T               |  |
|       |                   |           | *************************************** |                          |  |

| R6286 | NF CARBON R | R25J-18            | 1 | 415471804T               |  |
|-------|-------------|--------------------|---|--------------------------|--|
| R6290 | NF CARBON R | R25J-2.2           | 1 | 415470224T               | ************************************** |
| R6291 | NF CARBON R | R25J-2.2           | 1 | 415470224T               | ************************************** |
| R6292 | NF CARBON R | R25J-2.2           | 1 | 415470224T               |  |
| R6293 | NF CARBON R | R25J-2.2           | 1 | 415470224T               |  |
| R6294 | NF CARBON R | R25J-2.2           | 1 | 415470224T               |  |
| R6295 | NF CARBON R | R25J-2.2           | 1 | 415470224T               |  |
| R6296 | NF CARBON R | R25J-2.2           | 1 | 415470224T               |  |
| R6300 | NF CARBON R | R25J-2.2           | 1 | 415470224T               |  |
| R6301 | NF CARBON R | R25J-2.2           | 1 | 415470224T               |  |
| R6302 | NF CARBON R | R25J-2.2           | 1 | 415470224T               |  |
| R6303 | NF CARBON R | R25J-2.2           | 1 | 415470224T               |  |
| R6304 | NF CARBON R | R25J-2.2           | 1 | 415470224T               |  |
| R6305 | NF CARBON R | R25J-2.2           | 1 | 415470224T               |  |
| R6306 | NF CARBON R | R25J-2.2           | 1 | 415470224T               |  |
| R6310 | NF CARBON R | R25J-2.2           | 1 | 415471004T               |  |
| R6311 | NF CARBON R | R25J-10            | 1 | 415471004T<br>415471004T |  |
| R6312 | NF CARBON R | R25J-10            | 1 | 415471004T<br>415471004T |  |
| R6313 | NF CARBON R | R25J-10            | 1 | 415471004T<br>415471004T |  |
| R6314 | NF CARBON R | R25J-10            | 1 | 415471004T<br>415471004T |  |
| R6314 |             | R25J-10<br>R25J-10 | 1 |                          |  |
|       | NF CARBON R |                    |   | 415471004T               |  |
| R6316 | NF CARBON R | R25J-10            | 1 | 415471004T               |  |
| R6330 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6331 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6332 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6333 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6334 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6335 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6336 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6340 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6341 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6342 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6343 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6344 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6345 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6346 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6350 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6351 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6352 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6353 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6354 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6355 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6356 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6360 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6361 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6362 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6363 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
| R6364 | METAL R     | RNU1/2WCJ-0.22     | 1 | 453532294T               |  |
|       |             |                    |   |                          |  |

| D6265          | METAL D         | DNI11/2WCL 0.22                  | 1 | 453532294T               |  |
|----------------|-----------------|----------------------------------|---|--------------------------|--|
| R6365<br>R6366 | METAL R METAL R | RNU1/2WCJ-0.22<br>RNU1/2WCJ-0.22 | 1 | 453532294T<br>453532294T |  |
|                |                 |                                  |   |                          |  |
| R6400          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6401          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6402          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6403          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6404          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6405          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6406          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6410          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6411          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6412          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6413          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6414          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6415          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6416          | METAL PR        | MPR5W+5W 0R22                    | 1 | 4000233S                 |  |
| R6650          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6651          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6652          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6653          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6654          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6655          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6656          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6660          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6661          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6662          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6663          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6664          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6665          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| R6666          | NF CARBON R     | R25J-100                         | 1 | 415471014T               |  |
| JL6041B        | WIRE TRAP       | NPLG-3P586                       | 1 | 25055624                 |  |
| JL6042A        | WIRE HOL        | NSCT-3P874                       | 1 | 25051087                 |  |
| JL6042B        | WIRE TRAP       | NPLG-3P586                       | 1 | 25055624                 |  |
| P5010A         | SOCKET          | NSCT-3P2183                      | 1 | 25052286                 |  |
| P5011A         | SOCKET          | NSCT-3P2183                      | 1 | 25052286                 |  |
| P5012A         | SOCKET          | NSCT-3P2183                      | 1 | 25052286                 |  |
| P5013A         | SOCKET          | NSCT-3P2183                      | 1 | 25052286                 |  |
| P5014A         | SOCKET          | NSCT-3P2183                      | 1 | 25052286                 |  |
| P5015A         | SOCKET          | NSCT-3P2183                      | 1 | 25052286                 |  |
| P5016A         | SOCKET          | NSCT-3P2183                      | 1 | 25052286                 |  |
| P5020A         | TRM             | NTM-1P233(M1969)                 | 1 | 25060302                 |  |
| P5021A         | TRM             | NTM-1P233(M1969)                 | 1 | 25060302                 |  |
| P5022A         | TRM             | NTM-1P233(M1969)                 | 1 | 25060302                 |  |
| P5023A         | TRM             | NTM-1P233(M1969)                 | 1 | 25060302                 |  |
| P5024A         | TRM             | NTM-1P233(M1969)                 | 1 | 25060302                 |  |
| P5025A         | TRM             | NTM-1P233(M1969)                 | 1 | 25060302                 |  |
| P5026A         | TRM             | NTM-1P233(M1969)                 | 1 | 25060302                 |  |
| P6010A         | SOCKET          | NSCT-4P2184                      | 1 | 25052287                 |  |
| 1 001011       | SSCILLI         | 11001 112101                     | 1 | 20022201                 |  |

| DC011 A          | COCKET         | NGCT 4D2104                               | 1  | 25052207             |
|------------------|----------------|---|----|----------------------|
| P6011A           | SOCKET         | NSCT-4P2184                               | 11 | 25052287             |
| P6012A<br>P6013A | SOCKET         | NSCT-4P2184                               | 1  | 25052287             |
|                  | SOCKET         | NSCT-4P2184                               |    | 25052287             |
| P6014A<br>P6015A | SOCKET SOCKET  | NSCT-4P2184                               | 1  | 25052287             |
|                  |                | NSCT-4P2184                               | 1  | 25052287             |
| P6016A<br>P6030A | SOCKET<br>PLUG | NSCT-4P2184<br>IMSA-9115B-06              | 1  | 25052287<br>25056336 |
| P6030A<br>P6030B | SOCKET         | IMSA-9115B-06<br>IMSA-9115S-06L           | 1  | 25052986             |
| P6031A           | PLUG           |   | 1  | 25056336             |
| P6031B           | SOCKET         | IMSA-9115B-06<br>IMSA-9115S-06L           | 1  | 25052986             |
| P6032A           | PLUG           | IMSA-9115B-06                             | 1  | 25056336             |
| P6032B           | SOCKET         | IMSA-9115B-06<br>IMSA-9115S-06L           | 1  | 25052986             |
| P6033A           | PLUG           | IMSA-91158-06L                            | 1  | 25056336             |
| P6033B           | SOCKET         | IMSA-9115B-00<br>IMSA-9115S-06L           | 1  | 25052986             |
| P6034A           | PLUG           | IMSA-91158-06L                            | 1  | 25056336             |
| P6034A<br>P6034B | SOCKET         | IMSA-9115B-06<br>IMSA-9115S-06L           | 1  | 25052986             |
| P6035A           | PLUG           | IMSA-91158-06L                            | 1  | 25056336             |
| P6035B           | SOCKET         | IMSA-9115B-00<br>IMSA-9115S-06L           | 1  | 25052986             |
| P6036A           | PLUG           | IMSA-9115B-06                             | 1  | 25052986             |
| P6036B           | SOCKET         | IMSA-9115B-00<br>IMSA-9115S-06L           | 1  | 25052986             |
| P6050            | PLUG           | IMSA-9113S-00L<br>IMSA-9201B-1-06Z388-PT1 | 1  | 25056614             |
| P6051            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6052            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6053            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6054            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6055            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6056            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6060            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6061            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6062            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6063            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6064            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6065            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6066            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6070            | PLUG           | NPLG-2P645                                | 1  | 25055689             |
| P6071            | PLUG           | NPLG-2P645                                | 1  | 25055689             |
| P6072            | PLUG           | NPLG-2P645                                | 1  | 25055689             |
| P6073            | PLUG           | NPLG-2P645                                | 1  | 25055689             |
| P6074            | PLUG           | NPLG-2P645                                | 1  | 25055689             |
| P6075            | PLUG           | NPLG-2P645                                | 1  | 25055689             |
| P6076            | PLUG           | NPLG-2P645                                | 1  | 25055689             |
| P6080            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6081            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6082            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6083            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6084            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6085            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
| P6086            | PLUG           | IMSA-9201B-1-06Z388-PT1                   | 1  | 25056614             |
|                  |                |   |    |                      |

| P6090  | PLUG      | IMSA-9201B-1-06Z388-PT1 | 1 | 25056614      |  |
|--------|-----------|-------------------------|---|---------------|--|
| P6091  | PLUG      | IMSA-9201B-1-06Z388-PT1 | 1 | 25056614      |  |
| P6092  | PLUG      | IMSA-9201B-1-06Z388-PT1 | 1 | 25056614      |  |
| P6093  | PLUG      | IMSA-9201B-1-06Z388-PT1 | 1 | 25056614      |  |
| P6094  | PLUG      | IMSA-9201B-1-06Z388-PT1 | 1 | 25056614      |  |
| P6095  | PLUG      | IMSA-9201B-1-06Z388-PT1 | 1 | 25056614      |  |
| P6096  | PLUG      | IMSA-9201B-1-06Z388-PT1 | 1 | 25056614      |  |
| P6240  | SOCKET AS | NSAS-3P1658             | 1 | 2009991062AUL |  |
| P6250  | SOCKET AS | NSAS-4P1657             | 1 | 2009991061UL  |  |
| P6340A | PLUG      | NPLG-2P149              | 1 | 25055165      |  |
| P6340B | RETAINER  | (BUS-1)                 | 1 | 27142056      |  |
| P6340C | RETAINER  | (BUS-1)                 | 1 | 27142056      |  |
| P6350A | PLUG      | NPLG-2P149              | 1 | 25055165      |  |
| P6350B | RETAINER  | (BUS-2)                 | 1 | 27142057      |  |
| P6350C | RETAINER  | (BUS-2)                 | 1 | 27142057      |  |

## U25 DSP PC BOARD (NADSP-9072-1A)

| REF. NO. | PART NAME       | DESCRIPTION             | Q'TY | PART NO. (SN)   | REMARKS |
|----------|-----------------|-------------------------|------|-----------------|---------|
| Q3301    | IC              | TC74VHC157FT            | 1    | 22274157ER2TO   |         |
| Q3311    | IC              | TC74VHC157FT            | 1    | 22274157ER2TO   |         |
| Q3325    | IC              | TC74VHC157FT            | 1    | 22274157ER2TO   |         |
| Q3331    | IC              | TC74VHC157FT            | 1    | 22274157ER2TO   |         |
| Q3351    | IC              | TC74VHC157FT            | 1    | 22274157ER2TO   |         |
| Q3371    | IC              | TC74VHC157FT            | 1    | 22274157ER2TO   |         |
| Q3391    | IC              | TC74VHCT08AFT (EKJ)     | 1    | 22274008G1R2TO  |         |
| Q3391 or | IC              | TC74VHCT08AFT           | (1)  | 22274008GR2TO   |         |
| Q3401    | IC              | D790E001BZDH300         | 1    |                 | NRP     |
| Q3451    | IC(DSP1 MEMORY) | ES29LV160ET-70TG(0274)  | 1    | 222W0069R302746 |         |
| Q3451 or | IC(DSP1 MEMORY) | S29AL016D70TFI010(0274) | (1)  | 222W0063R302746 |         |
| Q3461    | IC              | RMS116T(LF)             | 1    | 22242340R3      |         |
| Q3461 or | IC              | M12L16161A-7TG          | (1)  | 22242278R3      |         |
| Q3461 or | IC              | IS42S16100C1-7TL        | (1)  | 22242123R2      |         |
| Q3461 or | IC              | IC42S16100              | (1)  | 22242123R3      |         |
| Q3471    | IC              | RMS116T(LF)             | 1    | 22242340R3      |         |
| Q3471 or | IC              | M12L16161A-7TG          | (1)  | 22242278R3      |         |
| Q3471 or | IC              | IS42S16100C1-7TL        | (1)  | 22242123R2      |         |
| Q3471 or | IC              | IC42S16100              | (1)  | 22242123R3      |         |
| Q3481    | IC              | TC7WU04FU(TE12L_F)      | 1    | 22240935R2      |         |
| Q3491    | IC              | TC74VHC541FT            | 1    | 22274541ER2TO   |         |
| Q3491 or | IC              | TC74VHC541FT(EKJ)       | (1)  | 22274541E1R2TO  |         |
| Q3501    | IC              | D788E001BRFP266         | 1    |                 | NRP     |
| Q3551    | IC(DSP2 MEMORY) | ES29LV400ET-70TG(0275)  | 1    | 222W0065R302757 |         |
| Q3551 or | IC(DSP2 MEMORY) | S29AL004D70TFI010(0275) | (1)  | 222W0061R302757 |         |
| Q3561    | IC              | RMS116T(LF)             | 1    | 22242340R3      |         |
| Q3561 or | IC              | M12L16161A-7TG          | (1)  | 22242278R3      |         |
| Q3561 or | IC              | IS42S16100C1-7TL        | (1)  | 22242123R2      |         |
| Q3561 or | IC              | IC42S16100              | (1)  | 22242123R3      |         |

| Q3571    | IC              | TC7WU04FU(TE12L_F)      | 1   | 22240935R2      |     |
|----------|-----------------|-------------------------|-----|-----------------|-----|
| Q3601    | IC              | D707E001BRFP250         | 1   |                 | NRP |
| Q3651    | IC(DSP3 MEMORY) | ES29LV800ET-70TG(0276)  | 1   | 222W0068R302768 |     |
| Q3651 or | IC(DSP3 MEMORY) | S29AL008D70TFI010(0276) | (1) | 222W0062R302768 |     |
| Q3661    | IC              | IS42S16400D-7TL         | 1   | 22241910R3      |     |
| Q3661 or | IC              | M12L64164A-7TG          | (1) | 22242441R3      |     |
| Q3661 or | IC              | K4S641632K-UC60         | (1) | 22242462R2      |     |
| Q7202    | IC              | BD7820                  | 1   | 22242300R2      |     |
| Q7222    | IC              | BD7820                  | 1   | 22242300R2      |     |
| Q7223    | IC              | BD7820                  | 1   | 22242300R2      |     |
| D7205    | C-DIODE         | 1SS352                  | 1   | 223234R2        |     |
| D7205 or | C-DIODE         | 1SS355                  | (1) | 223269R2        |     |
| D7205 or | C-DIODE         | MA2J1110GL              | (1) | 223302R2        |     |
| D7225    | C-DIODE         | 1SS352                  | 1   | 223234R2        |     |
| D7225 or | C-DIODE         | 1SS355                  | (1) | 223269R2        |     |
| D7225 or | C-DIODE         | MA2J1110GL              | (1) | 223302R2        |     |
| D7226    | C-DIODE         | 1SS352                  | 1   | 223234R2        |     |
| D7226 or | C-DIODE         | 1SS355                  | (1) | 223269R2        |     |
| D7226 or | C-DIODE         | MA2J1110GL              | (1) | 223302R2        |     |
| L3301    | CHOKE COIL      | LBC2518T470M            | 1   | 231364M470R2    |     |
| L3311    | EMIFIL          | BK1608HS102-T           | 1   | 230955R2        |     |
| L3312    | EMIFIL          | BK1608LM182-T           | 1   | 230958R1        |     |
| L3371    | EMIFIL          | BK1608LM182-T           | 1   | 230958R1        |     |
| L3372    | EMIFIL          | BK1608HS102-T           | 1   | 230955R2        |     |
| L3401    | EMIFIL          | ACF451832-333-T         | 1   | 230978R2        |     |
| L3402    | CHOKE COIL      | BLM21PG221SN1           | 1   | 230949R2        |     |
| L3403    | CHOKE COIL      | LBC2518T4R7M            | 1   | 231364M047R2    |     |
| L3451    | CHOKE COIL      | BLM21PG221SN1           | 1   | 230949R2        |     |
| L3481    | EMIFIL          | BK1608LM182-T           | 1   | 230958R1        |     |
| L3482    | EMIFIL          | BK1608LM182-T           | 1   | 230958R1        |     |
| L3483    | CHOKE COIL      | LBC2518T470M            | 1   | 231364M470R2    |     |
| L3491    | CHOKE COIL      | LBC2518T470M            | 1   | 231364M470R2    |     |
| L3501    | EMIFIL          | ACF451832-333-T         | 1   | 230978R2        |     |
| L3541    | CHOKE COIL      | LBC2518T4R7M            | 1   | 231364M047R2    |     |
| L3542    | CHOKE COIL      | BLM21PG221SN1           | 1   | 230949R2        |     |
| L3551    | CHOKE COIL      | BLM21PG221SN1           | 1   | 230949R2        |     |
| L3571    | CHOKE COIL      | LBC2518T470M            | 1   | 231364M470R2    |     |
| L3572    | EMIFIL          | BK1608LM182-T           | 1   | 230958R1        |     |
| L3601    | EMIFIL          | ACF451832-333-T         | 1   | 230978R2        |     |
| L3602    | EMIFIL          | BK1608LL241-T           | 1   | 230959R1        |     |
| L3603    | EMIFIL          | BK1608HS102-T           | 1   | 230955R2        |     |
| L3641    | CHOKE COIL      | LBC2518T4R7M            | 1   | 231364M047R2    |     |
| L3642    | CHOKE COIL      | BLM21PG221SN1           | 1   | 230949R2        |     |
| L3651    | CHOKE COIL      | BLM21PG221SN1           | 1   | 230949R2        |     |
| X3481    | CRYSTAL         | HC-49USSMD25.00MHz      | 1   | 3010444R2       |     |
| X3571    | CRYSTAL         | HC-49USSMD17.734MHz     | 1   | 3010442R2       |     |
| C3301    | C-CERA C        | CK725F1E-104Z1          | 1   | 332161040R1     |     |
| C3302    | CHIP ELECT C    | CEWX4V-100M             | 1   | 3981G1017R2     |     |

| G2211 | G GER A G    | CVZ05E1E 104Z1  |   | 22216104001 |
|-------|--------------|-----------------|---|-------------|
| C3311 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3315 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3325 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3331 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3351 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3371 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3391 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3401 | C-CERA C     | CC725CH1H-101J1 | 1 | 342101014R1 |
| C3402 | CHIP ELECT C | CEWX4V-100M     | 1 | 3981G1017R2 |
| C3403 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3405 | CHIP ELECT C | CEWX4V-220M     | 1 | 3981G2217R2 |
| C3411 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3412 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3413 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3414 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3415 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3416 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3417 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3418 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3419 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3420 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3421 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3425 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3426 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3427 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3428 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3429 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3430 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3431 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3432 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3433 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3434 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3435 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3451 | C-CERA C     | CC725CH1H-101J1 | 1 | 342101014R1 |
| C3452 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3453 | CHIP ELECT C | CEWX4V-220M     | 1 | 3981G2217R2 |
| C3461 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3462 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3463 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3464 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3465 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3466 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3467 | CHIP ELECT C | CEWX4V-220M     | 1 | 3981G2217R2 |
| C3471 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3472 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3473 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3474 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
| C3475 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |
|       |              |                 |   |             |

| C-CERA C     | CK725F1F-10471   | 1  | 332161040R1  |
|--------------|--|--|--|
|              |  |  | 3981G2217R2  |
|              |  |  | 342100902R1  |
|              |  |  | 342100902R1  |
|              |  |  | 332161040R1  |
|              |  |  | 3981G1017R2  |
|              |  |  | 332161040R1  |
|              |  |  | 332161040R1  |
|              |  |  | 332161040R1  |
|              |  |  | 342101014R1  |
|              |  |  | 332161040R1  |
|              |  |  | 332161040R1  |
|              |  |  | 332161040R1  |
|              |  |  | 3981G2217R2  |
|              |  |  | 332161040R1  |
|              |  | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
|              |  | 1  | 332161040R1  |
| C-CERA C     |  | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| CHIP ELECT C | CEWX4V-220M  | 1  | 3981G2217R2  |
| CHIP ELECT C | CEWX4V-220M  | 1  | 3981G2217R2  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CC725CH1H-101J1  | 1  | 342101014R1  |
| CHIP ELECT C | CEWX4V-220M  | 1  | 3981G2217R2  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| C-CERA C     | CK725F1E-104Z1   | 1  | 332161040R1  |
| CHIP ELECT C | CEWX4V-220M  | 1  | 3981G2217R2  |
| CHIP ELECT C | CEWX4V-220M  | 1  | 3981G2217R2  |
|              | C-CERA C | CHIP ELECT C C-CERA C | CHIP ELECT C C-CERA C C-CT25CH1H-090DD1 1 C-CERA C C-CT25CH1H-090DD1 1 C-CERA C C-CT25CH1H-090DD1 1 C-CERA C C-CERA C C-CT25CH1H-090DD1 1 C-CERA C C-CERA C C-CT25CH1H-100DM 1 C-CERA C C-CERA C C-CERA C C-CERA C C-CT25F1E-104Z1 1 C-CERA C C-CERA C C-CT25CH1H-10111 1 C-CERA C C-CERA C C-CT25CH1H-10111 1 C-CERA C C-CERA C C-CT25CH1H-10111 1 C-CERA C C-CERA C C-CT25CH1H-104Z1 1 C-CERA C C-CERA C C-CT25CH1H-104Z1 1 C-CERA C C-CERA C C-CT25CH1H-104Z1 1 C-CERA C C-CERA C C-CT25F1E-104Z1 1 C-CERA C C-CT25F1E-104Z1 1 C-CERA C C-CT25F1E-104Z1 1 C-CERA C C-CERA C C-CT25F1E-104Z1 1 C-CERA C C-CT25F1E-104Z1 1 C-CERA C C-CERA C C-CT25F1E-104Z1 1 C-CERA C C-CERA C C-CT25F1E-104Z1 1 C- |

| C3571 | C-CERA C     | CC725CH1H-120J1 | 1 | 342101204R1                |
|-------|--------------|-----------------|---|----------------------------|
| C3571 | C-CERA C     | CC725CH1H-120J1 | 1 | 342101204R1<br>342101204R1 |
| C3572 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3574 | CHIP ELECT C | CEWX4V-100M     | 1 | 3981G1017R2                |
|       |              |                 |   |                            |
| C3601 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3602 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3603 | C-CERA C     | CC725CH1H-101J1 | 1 | 342101014R1                |
| C3604 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3605 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3606 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3607 | CHIP ELECT C | CEWX4V-220M     | 1 | 3981G2217R2                |
| C3608 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3609 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3610 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3611 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3612 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3613 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3614 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3615 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3616 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3617 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3618 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3619 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3620 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3621 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3622 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3623 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3624 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3625 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3626 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3627 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3628 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3629 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3641 | CHIP ELECT C | CEWX4V-220M     | 1 | 3981G2217R2                |
| C3642 | CHIP ELECT C | CEWX4V-220M     | 1 | 3981G2217R2                |
| C3651 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3652 | C-CERA C     | CC725CH1H-101J1 | 1 | 342101014R1                |
| C3653 | CHIP ELECT C | CEWX4V-220M     | 1 | 3981G2217R2                |
| C3661 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3662 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3663 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3664 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3665 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3666 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3667 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
| C3668 | CHIP ELECT C | CEWX4V-220M     | 1 | 3981G2217R2                |
| C7204 | CHIP ELECT C | CEWX4V-100M     | 1 | 3981G1017R2                |
| C7205 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1                |
|       |              |                 |   |                            |

| C7206 | CUID ELECT C | CEWYAY 220M                    | 1 | 3981G2217R2                |   |
|-------|--------------|--------------------------------|---|----------------------------|---|
| C7206 | CHIP ELECT C | CEWX4V-220M                    | 1 |                            | *************************************** |
| C7224 | CHIP ELECT C | CEWX4V-100M                    | 1 | 3981G1017R2                |   |
| C7225 | C-CERA C     | CK725F1E-104Z1                 | 1 | 332161040R1                |   |
| C7226 | CHIP ELECT C | CEWX4V-100M                    | 1 | 3981G1017R2                |   |
| C7227 | CHIP ELECT C | CEWX4V-100M                    | 1 | 3981G1017R2                |   |
| C7228 | C-CERA C     | CK725F1E-104Z1                 | 1 | 332161040R1                |   |
| C7229 | CHIP ELECT C | CEWX4V-100M                    | 1 | 3981G1017R2                |   |
| R3301 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3302 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3303 | C-CARBON R   | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3304 | C-CARBON R   | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3305 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3306 | C-CARBON R   | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3307 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3311 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3312 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3313 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3314 | C-CARBON R   | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3315 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3316 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3317 | C-CARBON R   | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3318 | C-CARBON R   | RN72K1J-470JE                  | 1 | 435034704R1                | *************************************** |
| R3319 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3320 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3321 | C-CARBON R   | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3322 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3323 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3325 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3326 | C-CARBON R   | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3327 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3328 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                | 10                                      |
| R3330 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3331 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3332 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3333 | C-CARBON R   | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3334 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3335 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3336 | C-CARBON R   | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3337 | C-CARBON R   | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3338 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3339 | C-CARBON R   | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3340 | C-CARBON R   | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3341 | C-CARBON R   | RN72K1J-331JE                  | 1 | 4350337704R1               |   |
| R3342 | C-CARBON R   | RN72K1J-331JE<br>RN72K1J-331JE | 1 | 435033314R1                |   |
| R3345 | C-CARBON R   | RN72K1J-331JE<br>RN72K1J-101JE | 1 | 435031314R1<br>435031014R1 |   |
| R3351 | C-CARBON R   | RN72K1J-101JE<br>RN72K1J-331JE | 1 | 435033314R1                |   |
| R3352 | C-CARBON R   | RN72K1J-331JE<br>RN72K1J-331JE | 1 | 435033314R1<br>435033314R1 |   |
| R3353 | C-CARBON R   | RN72K1J-331JE<br>RN72K1J-470JE | 1 | 435034704R1                |   |
| KUUUU | C-CARDON K   | NIV/ZNIJ-4/UJE                 | 1 | +53U34/U4N1                |   |

| D2254 | CCAPPONE   | DN72V11 221IF                  | 1 | 425022214D1                |   |
|-------|------------|--------------------------------|---|----------------------------|---|
| R3354 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3355 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3356 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3357 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3358 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3359 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3360 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3361 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3362 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3371 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3373 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3374 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3376 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3377 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3379 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3380 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3381 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3382 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3391 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3401 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3402 | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |   |
| R3403 | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                | *************************************** |
| R3404 | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1                |   |
| R3405 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3406 | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |   |
| R3407 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3408 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3409 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3410 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3411 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3412 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3413 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3414 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3415 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3416 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3417 | C-CARBON R | RN72K1J-103JE<br>RN72K1J-331JE | 1 | 435033314R1                |   |
| R3417 | C-CARBON R | RN72K1J-331JE<br>RN72K1J-331JE | 1 | 435033314R1                |   |
| R3419 | C-CARBON R | RN72K1J-331JE<br>RN72K1J-331JE | 1 | 435033314R1                |   |
| R3420 | C-CARBON R | RN72K1J-331JE<br>RN72K1J-331JE | 1 | 435033314R1<br>435033314R1 |   |
|       |            |                                | 1 |                            |   |
| R3421 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3422 | C-CARBON R | RN72K1J-331JE                  |   | 435033314R1                |   |
| R3423 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3424 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3425 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3426 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3427 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3428 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3429 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
|       |            |                                |   |                            |   |

| D2420 | C CARRON R | DN23V11 102IF                  | 1 | 425021024D1 |  |
|-------|------------|--------------------------------|---|-------------|--|
| R3430 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3431 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3451 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3452 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3453 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3454 | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1 |  |
| R3455 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3456 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3457 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3482 | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1 |  |
| R3483 | C-CARBON R | RN72K1J-105JE                  | 1 | 435031054R1 |  |
| R3491 | C-CARBON R | RN72K1J-472JE                  | 1 | 435034724R1 |  |
| R3492 | C-CARBON R | RN72K1J-472JE                  | 1 | 435034724R1 |  |
| R3493 | C-CARBON R | RN72K1J-472JE                  | 1 | 435034724R1 |  |
| R3494 | C-CARBON R | RN72K1J-472JE                  | 1 | 435034724R1 |  |
| R3495 | C-CARBON R | RN72K1J-472JE                  | 1 | 435034724R1 |  |
| R3496 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3501 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |  |
| R3502 | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1 |  |
| R3503 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |  |
| R3504 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1 |  |
| R3505 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1 |  |
| R3506 | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1 |  |
| R3507 | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1 |  |
| R3508 | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1 |  |
| R3509 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1 |  |
| R3510 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1 |  |
| R3511 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1 |  |
| R3512 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1 |  |
| R3513 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1 |  |
| R3514 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3515 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3516 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3517 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3518 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3519 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3520 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3521 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |  |
| R3522 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |  |
| R3523 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |  |
| R3524 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |  |
| R3525 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3526 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |  |
| R3527 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1 |  |
| R3528 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1 |  |
| R3529 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1 |  |
| R3530 | C-CARBON R | RN72K13-1033E<br>RN72K1J-470JE | 1 | 435034704R1 |  |
| R3551 | C-CARBON R | RN72K1J-470JE<br>RN72K1J-103JE | 1 | 435031034R1 |  |
| 13331 | C-CANDON N | NIV/ZNIJ-1UJJE                 | 1 | TJJUJ1UJ4K1 |  |

| R3552 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
|-------|------------|---------------|---|-------------|
| R3553 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3554 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R3557 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3558 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3571 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |
| R3572 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |
| R3601 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R3602 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R3603 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R3604 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3605 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3606 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |
| R3607 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R3608 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R3609 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3610 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3611 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3612 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3613 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3614 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3615 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3616 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3617 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R3618 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3619 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3620 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3621 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R3622 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R3623 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R3624 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R3625 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3626 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R3627 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R3628 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3629 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3630 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3651 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3652 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3653 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3656 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R3657 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3658 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3659 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R7206 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |
| R7207 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |
| R7226 | C-CARBON R | RN72K1J-273JE | 1 | 435032734R1 |
| R7227 | C-CARBON R | RN72K1J-273JE | 1 | 435032734R1 |
|       |            |               |   |             |

| R7228  | C-CARBON R | RN72K1J-393JE    | 1 | 435033934R1 |
|--------|------------|------------------|---|-------------|
| R7229  | C-CARBON R | RN72K1J-273JE    | 1 | 435032734R1 |
| R7230  | C-CARBON R | RN72K1J-273JE    | 1 | 435032734R1 |
| R7239  | C-CARBON R | RN72K1J-393JE    | 1 | 435033934R1 |
| P3801B | SOCKET     | IMSA-9856S-30B-T | 1 | 25053236R2  |
| P3802B | SOCKET     | IMSA-9856S-30B-T | 1 | 25053236R2  |
| P3805A | PLUG       | NPLG-10P662      | 1 | 25055706    |

| U27 | DAC PC BOARD (NADG-9074-1A/1B/1C)            |
|-----|--|
| U28 | MICROPROCESSOR PC BOARD (NAAR-9075-1A/1B/1C) |
| U30 | XM PC BOARD (NARF-9077-1A/1B/1C)             |
| U31 | HOLDER PC BOARD (NAETC-9078-1A/1B/1C)        |
| U32 | AMPLIFIER PC BOARD (NAASP-9080-1A/1B/1C)     |
| U26 | AMPLIFIER PC BOARD (NAETC-9073-1A/1B/1C)     |

| REF. NO. | PART NAME | DESCRIPTION         | Q'TY | PART NO. (SN)  | REMARKS           |
|----------|-----------|---------------------|------|----------------|-------------------|
| U3001    | PHT CP    | GP1FAV51RK0F        | 1    | 24120129       |                   |
| U3002    | РНТ СР    | GP1FAV51RK0F        | 1    | 24120129       |                   |
| U3004    | РНТ СР    | GP1FAV51TKBF        | 1    | 24120132       |                   |
| Q101     | IC        | CS4344-CZZR         | 1    | 22242406R2     | <dc, dd=""></dc,> |
| Q102     | IC        | TA48033AF(TE16L_NQ) | 1    | 22278033DR2TO  | <dc, dd=""></dc,> |
| Q102 or  | IC        | BA33BC0FP           | (1)  | 22278033DR2RH  | <dc, dd=""></dc,> |
| Q102 or  | IC        | TA48033BF(TE16L_NQ) | (1)  | 22278033DBR2TO | <dc, dd=""></dc,> |
| Q103     | IC        | BU9450KV-E2         | 1    | 22242505R2     | <dc, dd=""></dc,> |
| Q104     | IC        | TA48033AF(TE16L_NQ) | 1    | 22278033DR2TO  | <dc, dd=""></dc,> |
| Q104 or  | IC        | BA33BC0FP           | (1)  | 22278033DR2RH  | <dc, dd=""></dc,> |
| Q104 or  | IC        | TA48033BF(TE16L_NQ) | (1)  | 22278033DBR2TO | <dc, dd=""></dc,> |
| Q105     | IC        | NE5532APSR          | 1    | 22242283R2     | <dc, dd=""></dc,> |
| Q106     | IC        | NE5532APSR          | 1    | 22242283R2     | <dc, dd=""></dc,> |
| Q107     | IC        | TC74VHCT08AFT (EKJ) | 1    | 22274008G1R2TO | <dc, dd=""></dc,> |
| Q107 or  | IC        | TC74VHCT08AFT       | (1)  | 22274008GR2TO  | <dc, dd=""></dc,> |
| Q3001    | IC        | TC74VHC157FT        | 1    | 22274157ER2TO  |                   |
| Q3021    | IC        | 74HCU04F            | 1    | 222740046R2    |                   |
| Q3031    | IC        | ICL3221ECVZ         | 1    | 22242268R2     |                   |
| Q3041    | IC        | CS42516-CQZ(R)-D    | 1    | 22242294R2     |                   |
| Q3071    | IC        | TC7WU04FU(TE12L_F)  | 1    | 22240935R2     |                   |
| Q3081    | IC        | NE5532APSR          | 1    | 22242283R2     |                   |
| Q3082    | IC        | NE5532APSR          | 1    | 22242283R2     |                   |
| Q3701    | IC        | PCM1796DBR          | 1    | 22242403R2     |                   |
| Q3721    | IC        | PCM1796DBR          | 1    | 22242403R2     |                   |
| Q3741    | IC        | PCM1796DBR          | 1    | 22242403R2     |                   |
| Q3761    | IC        | PCM1796DBR          | 1    | 22242403R2     |                   |
| Q3781    | IC        | PCM1796DBR          | 1    | 22242403R2     |                   |
| Q3800    | IC        | NE5532APSR          | 1    | 22242283R2     |                   |
| Q3801    | IC        | NE5532APSR          | 1    | 22242283R2     |                   |
| Q3802    | IC        | NE5532APSR          | 1    | 22242283R2     |                   |
| Q3803    | IC        | NE5532APSR          | 1    | 22242283R2     |                   |
| Q3804    | IC        | NE5532APSR          | 1    | 22242283R2     |                   |

| Q3805                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
|----------------------|-------------------------|--------------------------|-----|--------------------------|--|
| Q3805<br>Q3806       | IC                      | NE5532APSR<br>NE5532APSR | 1   | 22242283R2<br>22242283R2 |  |
| Q3800<br>Q3807       | IC                      | NE5532APSR<br>NE5532APSR | 1   | 22242283R2<br>22242283R2 |  |
| Q3807<br>Q3808       | IC IC                   | NE5532APSR<br>NE5532APSR | 1   | 22242283R2<br>22242283R2 |  |
|                      | IC                      |                          | 1   |                          |  |
| Q3809                |                         | NE5532APSR               |     | 22242283R2               |  |
| Q3810                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3811                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3812                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3813                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3814                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3820                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3821                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3822                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3823                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3824                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3830                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3831                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3832                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3833                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3834                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3840                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3841                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3842                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3843                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q3844                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q4201                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q4202                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q4204                | IC                      | R2S15211FP               | 1   | 22242297R3               |  |
| Q4291                | TR                      | 2SC2235-Y(TPE6_F)        | 1   | 2211654T                 |  |
| Q4292                | TR                      | 2SA965-Y(TPE6_F)         | 1   | 2211644T                 |  |
| Q4720                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q4721                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q4722                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q4723                | IC                      | NE5532APSR               | 1   | 22242283R2               |  |
| Q7001                | IC(MAIN MICROPROCESSOR) | M3087BFLBGP(0285)        | 1   | 222W0077R302850          |  |
| Q7002                | TR                      | RN1404                   | 1   | 2214490R2                |  |
| Q7002<br>Q7002 or    | TR                      | KRC104S                  | (1) | 2216210R2                |  |
| Q7002 of             | TR                      | DTA114YKA                | 1   | 2216480R2                |  |
| Q7003<br>Q7003 or    | TR                      | RN2407(TE85L_F)          | (1) | 2216360R2                |  |
| Q7003 or<br>Q7003 or | TR                      | KRA107S                  | (1) | 2216350R2<br>2216350R2   |  |
| Q7005 01<br>Q7005    | TR                      | DTC114EKA                | 1   | 2216250R2                |  |
| Q7003<br>Q7005 or    | TR                      | RN1402                   | (1) | 2216230R2<br>2214470R2   |  |
|                      |                         |                          |     |                          |  |
| Q7005 or             | TR                      | KRC102S                  | (1) | 2216190R2                |  |
| Q7006                | TR                      | DTA114YKA                | 1   | 2216480R2                |  |
| Q7006 or             | TR                      | RN2407(TE85L_F)          | (1) | 2216360R2                |  |
| Q7006 or             | TR                      | KRA107S                  | (1) | 2216350R2                |  |
| Q7007                | TR                      | DTC114EKA                | 1   | 2216250R2                |  |
| Q7007 or             | TR                      | RN1402                   | (1) | 2214470R2                |  |

| Q7007 or          | TR  | KRC102S              | (1) | 2216190R2                       |   |
|-------------------|-----|----------------------|-----|---------------------------------|---|
| 07151             | IC  | TC74VHCT08AFT (EKJ)  | 1   | 22274008G1R2TO                  | *************************************** |
| Q7151 or          | IC  | TC74VHCT08AFT        | (1) | 22274008GR2TO                   |   |
| Q7155             | IC  | TC74VHCT08AFT (EKJ)  | 1   | 22274008G1R2TO                  |   |
| Q7155 or          | IC  | TC74VHCT08AFT        | (1) | 22274008GR2TO                   |   |
| Q7161             | IC  | TC74VHCT08AFT (EKJ)  | 1   | 22274008G1R2TO                  |   |
| Q7161 or          | IC  | TC74VHCT08AFT        | (1) | 22274008GR2TO                   |   |
| Q7165             | IC  | TC74VHCT08AFT (EKJ)  | 1   | 22274008G1R2TO                  |   |
| Q7165 or          | IC  | TC74VHCT08AFT        | (1) | 22274008GR2TO                   |   |
| Q7171             | IC  | TC74VHC238FT         | 1   | 22274000GR2TO                   |   |
| Q7172             | IC  | 74AHC138PW           | 1   | 22274238ER210<br>22274138IR2PH  |   |
| Q7172 or          | IC  | TC74VHC138FT(EK2M    | (1) | 22274138IR2ITI<br>22274138ER2TO |   |
| Q7172 01<br>Q7181 | IC  | NJU7312AM            | 1   | 22242210R2                      |   |
| Q7181<br>Q7182    | TR  | 2SC2712-GR           | 1   | 2213145R2                       |   |
| Q7182<br>Q7183    | TR  | ZSC2/12-OR<br>RN1404 | 1   | 2213143R2<br>2214490R2          |   |
| Q7183<br>Q7183 or | TR  | KN1404<br>KRC104S    | (1) | 2214490R2<br>2216210R2          |   |
|                   |     |                      |     |                                 |   |
| Q7184             | TR  | RN2402               | 1   | 2214530R2                       |   |
| Q7184 or          | TR  | KRA102S              | (1) | 2216220R2                       |   |
| Q7201             | IC  | SI8008TM             | 1   | 22242323R2                      |   |
| Q7221             | IC  | SI8008TM             | 1   | 22242323R2                      |   |
| Q7231             | IC  | SI8008TM             | 1   | 22242323R2                      |   |
| Q7232             | IC  | BD7820               | 1   | 22242300R2                      | <dc, dd=""></dc,>                       |
| Q7241             | IC  | TA4805AF(TE16L_NQ)   | 1   | 22278005DR2TO                   |   |
| Q7241 or          | IC  | BA50BC0FP            | (1) | 22278005DR2RH                   |   |
| Q7242             | IC  | TA48033AF(TE16L_NQ)  | 1   | 22278033DR2TO                   |   |
| Q7242 or          | IC  | BA33BC0FP            | (1) | 22278033DR2RH                   |   |
| Q7242 or          | IC  | TA48033BF(TE16L_NQ)  | (1) | 22278033DBR2TO                  |   |
| Q7246             | IC  | TA48033AF(TE16L_NQ)  | 1   | 22278033DR2TO                   |   |
| Q7246 or          | IC  | BA33BC0FP            | (1) | 22278033DR2RH                   |   |
| Q7246 or          | IC  | TA48033BF(TE16L_NQ)  | (1) | 22278033DBR2TO                  |   |
| Q7251             | IC  | TA4805AF(TE16L_NQ)   | 1   | 22278005DR2TO                   |   |
| Q7261             | IC  | XC6202P502FR         | 1   | 22242331R2                      |   |
| Q7262             | IC  | XC6213B332MR         | 1   | 22242277R2                      |   |
| Q7341             | TR  | RN1404               | 1   | 2214490R2                       | <dc, dd=""></dc,>                       |
| Q7341 or          | TR  | KRC104S              | (1) | 2216210R2                       | <dc, dd=""></dc,>                       |
| Q7342             | TR  | RN2402               | 1   | 2214530R2                       | <dc, dd=""></dc,>                       |
| Q7342 or          | TR  | KRA102S              | (1) | 2216220R2                       | <dc, dd=""></dc,>                       |
| Q7351             | TR  | RN1404               | 1   | 2214490R2                       |   |
| Q7351 or          | TR  | KRC104S              | (1) | 2216210R2                       |   |
| Q7352             | TR  | RN2402               | 1   | 2214530R2                       |   |
| Q7352 or          | TR  | KRA102S              | (1) | 2216220R2                       |   |
| Q7355             | TR  | RN1404               | 1   | 2214490R2                       |   |
| Q7355 or          | TR  | KRC104S              | (1) | 2216210R2                       |   |
| Q7356             | TR  | RN2402               | 1   | 2214530R2                       |   |
| Q7356 or          | TR  | KRA102S              | (1) | 2216220R2                       |   |
| Q7361             | TR  | RN1404               | 1   | 2214490R2                       |   |
| Q7361 or          | TR  | KRC104S              | (1) | 2216210R2                       |   |
| Q7362             | TR  | RN2402               | 1   | 2214530R2                       |   |
| Z1302             | 111 | 10.12.102            |     |                                 |   |

| Q7362 or<br>Q7365<br>Q7365 or<br>Q7366<br>Q7366 or | TR TR TR TR | KRA102S<br>RN1404 | (1) | 2216220R2<br>2214490R2 |                   |
|--|-------------|-------------------|-----|------------------------|-------------------|
| Q7365 or<br>Q7366                                  | TR          |                   |     |                        |                   |
| Q7366  |             | KRC104S           | (1) | 2216210R2              |                   |
| -  | TR          | RN2402            | 1   | 2214530R2              |                   |
|  | TR          | KRA102S           | (1) | 2216220R2              |                   |
| Q7381  | IC          | S-812C56AUA-C3K   | 1   | 22242207R2             |                   |
| Q7385  | IC          | S-812C33AUA-C2N   | 1   | 22242222R2             |                   |
| Q7391  | IC          | R1EX25064ASA00A   | 1   | 22242581R2             |                   |
| Q7401  | TR          | DTC114EKA         | 1   | 2216250R2              |                   |
| Q7401 or   | TR          | RN1402            | (1) | 2214470R2              |                   |
| Q7401 or   | TR          | KRC102S           | (1) | 2216190R2              |                   |
| D4291  | ZENER D     | UDZS7.5B          | 1   | 224550750R2            |                   |
| D4292  | ZENER D     | UDZS7.5B          | 1   | 224550750R2            |                   |
| D7001  | C-DIODE     | 1SS352            | 1   | 223234R2               |                   |
| D7001 or   | C-DIODE     | 1SS355            | (1) | 223269R2               |                   |
| D7001 or   | C-DIODE     | MA2J1110GL        | (1) | 223302R2               |                   |
| D7002  | C-DIODE     | 1SS352            | 1   | 223234R2               |                   |
| D7002 or   | C-DIODE     | 1SS355            | (1) | 223269R2               |                   |
| D7002 or   | C-DIODE     | MA2J1110GL        | (1) | 223302R2               |                   |
| D7003  | C-DIODE     | 1SS352            | 1   | 223234R2               |                   |
| D7003 or   | C-DIODE     | 1SS355            | (1) | 223269R2               |                   |
| D7003 or   | C-DIODE     | MA2J1110GL        | (1) | 223302R2               |                   |
| D7053  | C-DIODE     | 1SS352            | 1   | 223234R2               |                   |
| D7053 or   | C-DIODE     | 1SS355            | (1) | 223269R2               |                   |
| D7053 or   | C-DIODE     | MA2J1110GL        | (1) | 223302R2               |                   |
| D7064  | C-DIODE     | 1SS352            | 1   | 223234R2               |                   |
| D7064 or   | C-DIODE     | 1SS355<br>1SS355  | (1) | 223269R2               |                   |
| D7064 or   | C-DIODE     | MA2J1110GL        | (1) | 223302R2               |                   |
| D7181  | ZENER D     | UDZS9.1B          | 1   | 224550910R2            |                   |
| D7201  | C-DIODE     | 1SS352            | 1   | 223234R2               |                   |
| D7201 or   | C-DIODE     | 1SS355            | (1) | 223269R2               |                   |
| D7201 or   | C-DIODE     | MA2J1110GL        | (1) | 223302R2               |                   |
| D7202  | C-DIODE     | CRS09(TE85L_Q)    | 1   | 223274R2               |                   |
| D7221  | C-DIODE     | 1SS352            | 1   | 223234R2               |                   |
| D7221 or   | C-DIODE     | 1SS355            | (1) | 223269R2               |                   |
| D7221 or   | C-DIODE     | MA2J1110GL        | (1) | 223302R2               |                   |
| D7222  | C-DIODE     | CRS09(TE85L_Q)    | 1   | 223274R2               |                   |
| D7231  | C-DIODE     | 1SS352            | 1   | 223234R2               |                   |
| D7231 or   | C-DIODE     | 1SS355            | (1) | 223269R2               |                   |
| D7231 or   | C-DIODE     | MA2J1110GL        | (1) | 223302R2               |                   |
| D7232  | C-DIODE     | CRS09(TE85L_Q)    | 1   | 223274R2               |                   |
| D7233  | C-DIODE     | 1SS352            | 1   | 223234R2               | <dc, dd=""></dc,> |
| D7233 or   | C-DIODE     | 1SS355            | (1) | 223269R2               | <dc, dd=""></dc,> |
| D7233 or   | C-DIODE     | MA2J1110GL        | (1) | 223302R2               | <dc, dd=""></dc,> |
| D7245  | DIODE       | RL1N4003          | 1   | 22380260T              |                   |
| D7245 or   | DIODE       | GP104003E         | (1) | 22380035T              |                   |
| D7246  | DIODE       | RL1N4003          | 1   | 22380260T              |                   |
| D7246 or   | DIODE       | GP104003E         | (1) | 22380035T              |                   |

| D7371    | C-DIODE    | 1SS352        | 1   | 223234R2     |                   |
|----------|------------|---------------|-----|--------------|-------------------|
| D7371 or | C-DIODE    | 1SS355        | (1) | 223269R2     |                   |
| D7371 or | C-DIODE    | MA2J1110GL    | (1) | 223302R2     |                   |
| D7372    | C-DIODE    | 1SS352        | 1   | 223234R2     |                   |
| D7372 or | C-DIODE    | 1SS355        | (1) | 223269R2     |                   |
| D7372 or | C-DIODE    | MA2J1110GL    | (1) | 223302R2     |                   |
| D7381    | C-DIODE    | 1SS352        | 1   | 223234R2     |                   |
| D7381 or | C-DIODE    | 1SS355        | (1) | 223269R2     |                   |
| D7381 or | C-DIODE    | MA2J1110GL    | (1) | 223302R2     |                   |
| D7382    | C-DIODE    | 1SS352        | 1   | 223234R2     |                   |
| D7382 or | C-DIODE    | 1SS355        | (1) | 223269R2     |                   |
| D7382 or | C-DIODE    | MA2J1110GL    | (1) | 223302R2     |                   |
| D7383    | C-DIODE    | 1SS352        | 1   | 223234R2     |                   |
| D7383 or | C-DIODE    | 1SS355        | (1) | 223269R2     |                   |
| D7383 or | C-DIODE    | MA2J1110GL    | (1) | 223302R2     |                   |
| D7384    | C-DIODE    | 1SS352        | 1   | 223234R2     |                   |
| D7384 or | C-DIODE    | 1SS355        | (1) | 223269R2     |                   |
| D7384 or | C-DIODE    | MA2J1110GL    | (1) | 223302R2     |                   |
| L101     | EMIFIL     | BK1608LM182-T | 1   | 230958R1     | <dc, dd=""></dc,> |
| L102     | CHOKE COIL | NCH-1471      | 1   | 231237K022R2 | <dc, dd=""></dc,> |
| L103     | CHOKE COIL | BLM21PG221SN1 | 1   | 230949R2     | <dc, dd=""></dc,> |
| L104     | CHOKE COIL | NCH-1471      | 1   | 231237K022R2 | <dc, dd=""></dc,> |
| L105     | CHOKE COIL | BLM21PG221SN1 | 1   | 230949R2     | <dc, dd=""></dc,> |
| L106     | CHOKE COIL | BLM21PG221SN1 | 1   | 230949R2     | <dc, dd=""></dc,> |
| L3001    | CHOKE COIL | LBC2518T470M  | 1   | 231364M470R2 |                   |
| L3002    | CHOKE COIL | LBC2518T470M  | 1   | 231364M470R2 |                   |
| L3011    | CHOKE COIL | LBC2518T2R2M  | 1   | 231364M022R2 |                   |
| L3012    | CHOKE COIL | LBC2518T2R2M  | 1   | 231364M022R2 |                   |
| L3013    | CHOKE COIL | LBC2518T2R2M  | 1   | 231364M022R2 |                   |
| L3021    | CHOKE COIL | LBC2518T470M  | 1   | 231364M470R2 |                   |
| L3031    | CHOKE COIL | LBC2518T470M  | 1   | 231364M470R2 |                   |
| L3041    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
| L3042    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
| L3043    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
| L3044    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
| L3045    | EMIFIL     | BK1608LM182-T | 1   | 230958R1     |                   |
| L3046    | EMIFIL     | BK1608HS102-T | 1   | 230955R2     |                   |
| L3071    | CHOKE COIL | LBC2518T470M  | 1   | 231364M470R2 |                   |
| L3072    | EMIFIL     | BK1608LM182-T | 1   | 230958R1     |                   |
| L3701    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
| L3702    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
| L3703    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
| L3704    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
| L3721    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
| L3722    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
| L3723    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
| L3724    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
| L3741    | CHOKE COIL | LBC2518T4R7M  | 1   | 231364M047R2 |                   |
|          |            |               |     |              |                   |

| L3742           | CHOKE COIL | LBC2518T4R7M        | 1   | 231364M047R2           |   |
|-----------------|------------|---------------------|-----|------------------------|---|
| L3742<br>L3743  | CHOKE COIL | LBC2518T4R7M        | 1   | 231364M047R2           |   |
| L3744           | CHOKE COIL | LBC2518T4R7M        | 1   | 231364M047R2           |   |
| L3761           | CHOKE COIL | LBC2518T4R7M        | 1   | 231364M047R2           |   |
| L3762           | CHOKE COIL | LBC2518T4R7M        | 1   | 231364M047R2           |   |
| L3763           | CHOKE COIL | LBC2518T4R7M        | 1   | 231364M047R2           |   |
| L3764           | CHOKE COIL | LBC2518T4R7M        | 1   | 231364M047R2           |   |
| L3781           | CHOKE COIL | LBC2518T4R7M        | 1   | 231364M047R2           |   |
| L3781           | CHOKE COIL | LBC2518T4R7M        | 1   | 231364M047R2           |   |
| L3783           | CHOKE COIL | LBC2518T4R7M        | 1   | 231364M047R2           |   |
| L3784           | CHOKE COIL | LBC2518T4R7M        | 1   | 231364M047R2           |   |
| L7165           | CHOKE COIL | LBC2518T4R7M        | 1   | 231364M047R2           |   |
| L7201           | CHOKE COIL | NCH-2541            | 1   | 231363K470A            |   |
| L7211           | CHOKE COIL | NCH-2541            | 1   | 231363K470A            |   |
| L7211           | CHOKE COIL | NCH-2541            | 1   | 231363K470A            |   |
| X101            | CRYSTAL    | DSX840GA 45.1584MHz | 1   | 3010420R2              | <dc, dd=""></dc,>                       |
| X101<br>X101 or | CRYSTAL    | FCX-02N 45.1584MHz  | (1) | 3010420R2<br>3010421R2 | <dc, dd=""><br/><dc, dd=""></dc,></dc,> |
| X3071           | CRYSTAL    | HC-49US24.576MHz    | 1   | 3010421K2<br>3010423T  | <dc, dd=""></dc,>                       |
| X3071A          | IB CUSHION | W15*3t TAPE         | 1   | 28141585               |   |
| X7001           | CERA LOCK  | CSTCE8M00G55-R0     | 1   | 3010416R2              |   |
| C101            | VR C       | CE04W6.3V-470M(VR)  | 1   | 394624717T             | DC DD                                   |
|                 |            |                     |     |                        | <dc, dd=""></dc,>                       |
| C102            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C104            | UTSP C     | CE04W50V-10M(UTSP)  | 1   | 397581007T             | <dc, dd=""></dc,>                       |
| C105            | UTSP C     | CE04W50V-10M(UTSP)  | 1   | 397581007T             | <dc, dd=""></dc,>                       |
| C106            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C107            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C108            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C109            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C110            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C111            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C112            | C-CERA C   | CC725CH1H-080D1     | 1   | 342100802R1            | <dc, dd=""></dc,>                       |
| C113            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C114            | C-CERA C   | CC725CH1H-040C1     | 1   | 342100401R1            | <dc, dd=""></dc,>                       |
| C115            | C-CERA C   | CK725B1H-102K1      | 1   | 332101025R1            | <dc, dd=""></dc,>                       |
| C116            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C117            | VR C       | CE04W16V-100M(VR)   | 1   | 394641017T             | <dc, dd=""></dc,>                       |
| C118            | VR C       | CE04W6.3V-470M(VR)  | 1   | 394624717T             | <dc, dd=""></dc,>                       |
| C119            | VR C       | CE04W16V-100M(VR)   | 1   | 394641017T             | <dc, dd=""></dc,>                       |
| C120            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C121            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C122            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C123            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C124            | VR C       | CE04W16V-100M(VR)   | 1   | 394641017T             | <dc, dd=""></dc,>                       |
| C125            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C126            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C127            | C-CERA C   | CK725F1E-104Z1      | 1   | 332161040R1            | <dc, dd=""></dc,>                       |
| C128            | UTSP C     | CE04W50V-10M(UTSP)  | 1   | 397581007T             | <dc, dd=""></dc,>                       |
| C129            | UTSP C     | CE04W50V-10M(UTSP)  | 1   | 397581007T             | <dc, dd=""></dc,>                       |
|                 |            |                     |     |                        |   |

| C130  | C-CERA C | CC725CH1H-821J1     | 1 | 342108214R1 | <dc, dd=""></dc,> |
|-------|----------|---------------------|---|-------------|-------------------|
| C131  | C-CERA C | CC725CH1H-821J1     | 1 | 342108214R1 | <dc, dd=""></dc,> |
| C132  | C-CERA C | CC725CH1H-821J1     | 1 | 342108214R1 | <dc, dd=""></dc,> |
| C133  | C-CERA C | CC725CH1H-821J1     | 1 | 342108214R1 | <dc, dd=""></dc,> |
| C135  | UTSP C   | CE04W25V-100M(UTSP) | 1 | 397551017T  | <dc, dd=""></dc,> |
| C136  | UTSP C   | CE04W25V-100M(UTSP) | 1 | 397551017T  | <dc, dd=""></dc,> |
| C137  | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  | <dc, dd=""></dc,> |
| C138  | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  | <dc, dd=""></dc,> |
| C139  | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 | <dc, dd=""></dc,> |
| C140  | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 | <dc, dd=""></dc,> |
| C3001 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |                   |
| C3002 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |                   |
| C3004 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |                   |
| C3006 | VR C     | CE04W16V-100M(VR)   | 1 | 394641017T  |                   |
| C3007 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |                   |
| C3008 | VR C     | CE04W16V-100M(VR)   | 1 | 394641017T  |                   |
| C3011 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |                   |
| C3012 | C-CERA C | CK725B1C-104K1      | 1 | 332121045R1 |                   |
| C3013 | C-CERA C | CC725CH1H-080D1     | 1 | 342100802R1 |                   |
| C3014 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |                   |
| C3015 | C-CERA C | CK725B1C-104K1      | 1 | 332121045R1 |                   |
| C3016 | C-CERA C | CC725CH1H-080D1     | 1 | 342100802R1 |                   |
| C3017 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |                   |
| C3018 | C-CERA C | CK725B1C-104K1      | 1 | 332121045R1 |                   |
| C3019 | C-CERA C | CC725CH1H-080D1     | 1 | 342100802R1 |                   |
| C3021 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |                   |
| C3022 | VR C     | CE04W16V-100M(VR)   | 1 | 394641017T  |                   |
| C3025 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |                   |
| C3031 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |                   |
| C3032 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |                   |
| C3033 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |                   |
| C3034 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |                   |
| C3035 | VR C     | CE04W16V-100M(VR)   | 1 | 394641017T  |                   |
| C3036 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |                   |
| C3037 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |                   |
| C3041 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |                   |
| C3042 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |                   |
| C3043 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |                   |
| C3044 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |                   |
| C3045 | TF C     | ECQ-B50V-222J       | 1 | 374722224T  |                   |
| C3046 | TF C     | ECQ-B50V-222J       | 1 | 374722224T  |                   |
| C3047 | UTSJ C   | CE04W25V-47M(UTSJ)  | 1 | 398054707T  |                   |
| C3048 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |                   |
| C3049 | VR C     | CE04W16V-100M(VR)   | 1 | 394641017T  |                   |
| C3050 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |                   |
| C3051 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |                   |
| C3052 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |                   |
| C3053 | C-CERA C | CK725B1H-223K1      | 1 | 332102235R1 |                   |
|       |          |                     |   |             |                   |

| C3054          | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1                |  |
|----------------|----------|---------------------|---|----------------------------|--|
| C3055          | C-CERA C | CC725CH1H-330J1     | 1 | 342103304R1                |  |
| C3055          | C-CERA C | CC725CH1H-330J1     | 1 | 342103304R1<br>342103304R1 | the state of the s |
| C3057          | C-CERA C | CC725CH1H-330J1     | 1 | 342103304R1<br>342103304R1 |  |
| C3059          | UTSP C   |                     | 1 | 397534717T                 |  |
|                |          | CE04W10V-470M(UTSP) |   |                            |  |
| C3061          | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1                |  |
| C3062          | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1                |  |
| C3064          | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1                |  |
| C3065          | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1                |  |
| C3069          | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1                |  |
| C3071          | C-CERA C | CC725CH1H-120J1     | 1 | 342101204R1                |  |
| C3072          | C-CERA C | CC725CH1H-120J1     | 1 | 342101204R1                |  |
| C3073          | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1                |  |
| C3081          | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T                 |  |
| C3082          | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T                 |  |
| C3091          | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T                 |  |
| C3092          | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T                 |  |
| C3095          | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T                 |  |
| C3096          | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T                 |  |
| C3701          | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
| C3702          | C-FILM C | ECHU16V-104J        | 1 | 373041044R2                |  |
| C3703          | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
| C3704          | C-FILM C | ECHU16V-104J        | 1 | 373041044R2                |  |
| C3705          | UTSJ C   | CE04W25V-47M(UTSJ)  | 1 | 398054707T                 |  |
| C3707          | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
| C3708          | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
| C3709          | C-FILM C | ECHU16V-104J        | 1 | 373041044R2                |  |
| C3710          | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1                |  |
| C3711          | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1                |  |
| C3721          | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
| C3722          | C-FILM C | ECHU16V-104J        | 1 | 373041044R2                |  |
| C3723          | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
| C3724          | C-FILM C | ECHU16V-104J        | 1 | 373041044R2                |  |
| C3725          | UTSJ C   | CE04W25V-47M(UTSJ)  | 1 | 398054707T                 |  |
| C3727          | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
| C3728          | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
| C3729          | C-FILM C | ECHU16V-104J        | 1 | 373041044R2                |  |
| C3729          | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1                |  |
| C3741          | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
| C3741<br>C3742 | C-FILM C | ECHU16V-104J        | 1 | 373041044R2                |  |
| C3742<br>C3743 | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
| C3744          | C-FILM C | ECHU16V-104J        | 1 | 373041044R2                |  |
|                |          |                     |   |                            |  |
| C3745          | UTSJ C   | CE04W25V-47M(UTSJ)  | 1 | 398054707T                 |  |
| C3747          | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
| C3748          | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
| C3749          | C-FILM C | ECHU16V-104J        | 1 | 373041044R2                |  |
| C3750          | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1                |  |
| C3761          | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T                 |  |
|                |          |                     |   |                            |  |

| C2762          | CELMC              | ECHILIEV 1041                           | 1 | 272041044P2               |
|----------------|--------------------|---|---|---------------------------|
| C3762<br>C3763 | C-FILM C<br>UTSP C | ECHU16V-104J<br>CE04W10V-220M(UTSP)     | 1 | 373041044R2<br>397532217T |
| C3764          | C-FILM C           | ECHU16V-104J                            | 1 | 373041044R2               |
| C3765          | UTSJ C             | CE04W25V-47M(UTSJ)                      | 1 | 398054707T                |
| C3767          | UTSP C             | CE04W25V-47M(UTSJ) CE04W10V-220M(UTSP)  | 1 | 397532217T                |
| C3768          | UTSP C             | CE04W10V-220M(UTSP) CE04W10V-220M(UTSP) | 1 | 397532217T<br>397532217T  |
| C3769          | C-FILM C           | ECHU16V-104J                            | 1 | 373041044R2               |
| C3770          | C-CERA C           | CK725B1H-102K1                          | 1 | 332101025R1               |
| C3770          | UTSP C             | CE04W10V-220M(UTSP)                     | 1 | 397532217T                |
| C3782          | C-FILM C           | ECHU16V-104J                            | 1 | 373041044R2               |
| C3783          | UTSP C             | CE04W10V-220M(UTSP)                     | 1 | 397532217T                |
| C3784          | C-FILM C           | ECHU16V-104J                            | 1 | 373041044R2               |
| C3785          | UTSJ C             | CE04W25V-47M(UTSJ)                      | 1 | 398054707T                |
| C3787          | UTSP C             | CE04W25V-47M(UTSP)                      | 1 | 397532217T                |
| C3788          | UTSP C             | CE04W10V-220M(UTSP)                     | 1 | 397532217T<br>397532217T  |
| C3789          | C-FILM C           | ECHU16V-104J                            | 1 | 373041044R2               |
| C3790          | C-CERA C           | CK725B1H-102K1                          | 1 | 332101025R1               |
| C3800          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3801          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3802          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3803          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3804          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3805          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3806          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3807          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3808          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3809          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3810          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3811          | TFC                | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3812          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3813          | TFC                | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3814          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3815          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3816          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3817          | TFC                | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3818          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3819          | TF C               | ECQ-B50V-272J                           | 1 | 374722724T                |
| C3820          | TF C               | ECQ-B50V-101K                           | 1 | 374721015T                |
| C3821          | TF C               | ECQ-B50V-101K                           | 1 | 374721015T                |
| C3822          | TFC                | ECQ-B50V-101K                           | 1 | 374721015T                |
| C3823          | TF C               | ECQ-B50V-101K                           | 1 | 374721015T                |
| C3824          | TF C               | ECQ-B50V-101K                           | 1 | 374721015T                |
| C3825          | TF C               | ECQ-B50V-101K                           | 1 | 374721015T                |
| C3826          | TF C               | ECQ-B50V-101K                           | 1 | 374721015T                |
| C3827          | TF C               | ECQ-B50V-101K                           | 1 | 374721015T                |
| C3828          | TF C               | ECQ-B50V-101K                           | 1 | 374721015T                |
| C3829          | TF C               | ECQ-B50V-101K                           | 1 | 374721015T                |
| C3830          | TF C               | ECQ-B50V-101K                           | 1 | 374721015T                |
|                |                    | `                                       |   |                           |

| C3831 | TF C   | ECQ-B50V-101K           | 1 | 374721015T                |
|-------|--------|-------------------------|---|---------------------------|
| C3832 | TF C   | ECQ-B50V-101K           | 1 | 374721015T                |
| C3833 | TF C   | ECQ-B50V-101K           | 1 | 374721015T                |
| C3834 | TF C   | ECQ-B50V-101K           | 1 | 374721015T                |
| C3835 | TF C   | ECQ-B50V-101K           | 1 | 374721015T                |
| C3836 | TF C   | ECQ-B50V-101K           | 1 | 374721015T                |
| C3837 | TF C   | ECQ-B50V-101K           | 1 | 374721015T                |
| C3838 | TF C   | ECQ-B50V-101K           | 1 | 374721015T                |
| C3839 | TF C   | ECQ-B50V-101K           | 1 | 374721015T                |
| C3850 | TF C   | ECQ-B50V-122J           | 1 | 374721224T                |
| C3851 | TF C   | ECQ-B50V-122J           | 1 | 374721224T                |
| C3852 | TF C   | ECQ-B50V-122J           | 1 | 374721224T                |
| C3853 | TF C   | ECQ-B50V-122J           | 1 | 374721224T                |
| C3854 | TF C   | ECQ-B50V-122J           | 1 | 374721224T                |
| C3855 | TF C   | ECQ-B50V-122J           | 1 | 374721224T                |
| C3856 | TF C   | ECQ-B50V-122J           | 1 | 374721224T                |
| C3857 | TF C   | ECQ-B50V-122J           | 1 | 374721224T                |
| C3858 | TF C   | ECQ-B50V-122J           | 1 | 374721224T                |
| C3859 | TF C   | ECQ-B50V-122J           | 1 | 374721224T                |
| C3860 | TF C   | ECQ-B50V-471J           | 1 | 374724714T                |
| C3861 | TF C   | ECQ-B50V-471J           | 1 | 374724714T                |
| C3862 | TF C   | ECQ-B50V-471J           | 1 | 374724714T                |
| C3863 | TF C   | ECQ-B50V-471J           | 1 | 374724714T                |
| C3864 | TF C   | ECQ-B50V-471J           | 1 | 374724714T                |
| C3865 | TF C   | ECQ-B50V-471J           | 1 | 374724714T                |
| C3866 | TF C   | ECQ-B50V-471J           | 1 | 374724714T                |
| C3867 | TF C   | ECQ-B50V-471J           | 1 | 374724714T                |
| C3868 | TF C   | ECQ-B50V-471J           | 1 | 374724714T                |
| C3869 | TF C   | ECQ-B50V-471J           | 1 | 374724714T                |
| C3870 | UTSP C | CE04W50V 47M(UTSP)      | 1 | 397584707T                |
| C3871 | UTSP C | CE04W50V 47M(UTSP)      | 1 | 397584707T                |
| C3872 | UTSP C | CE04W50V 47M(UTSP)      | 1 | 397584707T                |
| C3873 | UTSP C | CE04W50V 47M(UTSP)      | 1 | 397584707T                |
| C3874 | UTSP C | CE04W50V 47M(UTSP)      | 1 | 397584707T                |
| C3875 | UTSP C | CE04W50V 47M(UTSP)      | 1 | 397584707T                |
| C3876 | UTSP C | CE04W50V 47M(UTSP)      | 1 | 397584707T                |
| C3877 | UTSP C | CE04W50V 47M(UTSP)      | 1 | 397584707T                |
| C3878 | UTSP C | CE04W50V 47M(UTSP)      | 1 | 397584707T                |
| C3879 | UTSP C | CE04W50V 47M(UTSP)      | 1 | 397584707T                |
| C3880 | UTSP C | CE04W25V-220M(UTSP)     | 1 | 397552217T                |
| C3881 | UTSP C | CE04W25V-220M(UTSP)     | 1 | 397552217T                |
| C3882 | UTSP C | CE04W25V-220M(UTSP)     | 1 | 397552217T                |
| C3883 | UTSP C | CE04W25V-220M(UTSP)     | 1 | 397552217T                |
| C3884 | UTSP C | CE04W25V-220M(UTSP)     | 1 | 397552217T                |
| C3885 | UTSP C | CE04W25V-220M(UTSP)     | 1 | 397552217T                |
| C3886 | UTSP C | CE04W25V-220M(UTSP)     | 1 | 397552217T                |
| C3887 | UTSP C | CE04W25V-220M(UTSP)     | 1 | 397/332217T<br>397552217T |
| C3888 | UTSP C | CE04W25V-220M(UTSP)     | 1 | 397/3322171<br>397552217T |
| C3000 | UIST   | CE04W 23 V-220M(U I SY) | 1 | 37/33441/1                |

| C3889          | UTSP C | CE04W25V-220M(UTSP)                     | 1 | 397552217T               |
|----------------|--------|---|---|--------------------------|
| C4201          | UTSP C | CE04W25V-220M(UTSP)  CE04W50V 47M(UTSP) | 1 | 397584707T               |
| C4201          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4202          | UTSP C | CE04W30V 47M(UTSP)                      | 1 | 397584707T               |
| C4203          | UTSP C | CE04W30V 47M(UTSP)                      | 1 | 397584707T               |
| C4204          | UTSP C | CE04W30V 47M(UTSP)                      | 1 | 397584707T               |
| C4205          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4207          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4207          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4213          | UTSP C | CE04W30V 47M(UTSP)                      | 1 | 397584707T               |
| C4213          | UTSP C | CE04W30V 47M(UTSP)                      | 1 | 397584707T               |
| C4214<br>C4227 | TFC    | ECQ-B50V-223J                           | 1 | 374722234T               |
| C4227          | TFC    | ECQ-B50V-223J                           | 1 | 374722234T               |
| C4228          | TFC    |   | 1 |                          |
| C4229<br>C4230 | TFC    | ECQ-V50V-823J                           | 1 | 374728234T<br>374728234T |
| C4230<br>C4231 | TFC    | ECQ-V50V-823J                           | 1 |                          |
| C4231<br>C4232 |        | ECQ-V50V-474J                           |   | 374724744T               |
|                | TF C   | ECQ-V50V-474J                           | 1 | 374724744T               |
| C4233          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4234          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4235          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4236          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4237          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4238          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4239          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4240          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4291          | UTSP C | CE04W25V-220M(UTSP)                     | 1 | 397552217T               |
| C4292          | UTSP C | CE04W25V-220M(UTSP)                     | 1 | 397552217T               |
| C4293          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4294          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4295          | UTSP C | CE04W25V-220M(UTSP)                     | 1 | 397552217T               |
| C4296          | UTSP C | CE04W25V-220M(UTSP)                     | 1 | 397552217T               |
| C4720          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4721          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4722          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4723          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4724          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4725          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4726          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4727          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4730          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4731          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4732          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4733          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4734          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4735          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4736          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4737          | UTSP C | CE04W50V 47M(UTSP)                      | 1 | 397584707T               |
| C4740          | UTSP C | CE04W25V-100M(UTSP)                     | 1 | 397551017T               |
|                |        |   |   |                          |

| C4741          | UTSP C   | CE04W25V-100M(UTSP)                 | 1 | 397551017T                 |   |
|----------------|----------|-------------------------------------|---|----------------------------|---|
| C7002          | VR C     | CE04W50V-4.7M(VR)                   | 1 | 394680477T                 |   |
| C7003          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7004          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                | <mp, dt="" mt,=""></mp,>                |
| C7005          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                | , |
| C7006          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7007          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7008          | C-CERA C | CK725B1H-102K1                      | 1 | 332101025R1                |   |
| C7009          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7010          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7011          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7012          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7013          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7014          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7015          | C-CERA C | CK725F1H-102K1                      | 1 | 332101045R1                |   |
| C7016          | C-CERA C | CK725B1H-102K1                      | 1 | 332101025R1                |   |
| C7017          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7018          | C-CERA C | CK725B1H-102K1                      | 1 | 332101045R1                |   |
| C7019          | C-CERA C | CK725B1H-102K1                      | 1 | 332101025R1                |   |
| C7020          | C-CERA C | CK725B1H-102K1                      | 1 | 332101025R1                |   |
| C7020          | C-CERA C | CK725B1H-102K1                      | 1 | 332101025R1                |   |
| C7021          | C-CERA C | CC725CH1H-101J1                     | 1 | 342101023R1                |   |
| C7022          | C-CERA C | CC725CH1H-101J1                     | 1 | 342101014R1                |   |
| C7023          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7024          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7027          | C-CERA C |                                     | 1 |                            |   |
| C7027          | C-CERA C | CK725F1E-104Z1<br>CK725F1E-104Z1    | 1 | 332161040R1<br>332161040R1 |   |
| C7151          | VR C     | CK725F1E-104Z1<br>CE04W16V-100M(VR) | 1 | 394641017T                 |   |
| C7155          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
|                |          |                                     |   |                            |   |
| C7161          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7165          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7166          | VR C     | CE04W16V-100M(VR)                   | 1 | 394641017T                 |   |
| C7171<br>C7172 | C-CERA C | CK725F1E-104Z1                      |   | 332161040R1                |   |
|                | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7181          | C-CERA C | CK725F1E-104Z1                      | 1 | 332161040R1                |   |
| C7183          | VR C     | CE04W16V-100M(VR)                   | 1 | 394641017T                 |   |
| C7201          | VR C     | CE04W16V-470M(VR)                   | 1 | 394644717T                 |   |
| C7203          | VR C     | CE04W6.3V-1000M(VR)                 | 1 | 394621027T                 |   |
| C7221          | VR C     | CE04W16V-470M(VR)                   | 1 | 394644717T                 |   |
| C7223          | VR C     | CE04W6.3V-1000M(VR)                 | 1 | 394621027T                 |   |
| C7231          | VR C     | CE04W16V-470M(VR)                   | 1 | 394644717T                 |   |
| C7233          | VR C     | CE04W6.3V-1000M(VR)                 | 1 | 394621027T                 |   |
| C7234          | UTSP C   | CE04W50V-10M(UTSP)                  | 1 | 397581007T                 | <dc, dd=""></dc,>                       |
| C7235          | VR C     | CE04W16V-100M(VR)                   | 1 | 394641017T                 | <dc, dd=""></dc,>                       |
| C7241          | UTSP C   | CE04W50V-10M(UTSP)                  | 1 | 397581007T                 |   |
| C7242          | VR C     | CE04W16V-100M(VR)                   | 1 | 394641017T                 |   |
| C7243          | VR C     | CE04W16V-100M(VR)                   | 1 | 394641017T                 |   |
| C7247          | UTSP C   | CE04W50V-10M(UTSP)                  | 1 | 397581007T                 |   |
|                |          |                                     |   |                            |   |

| C7248          | VR C                 | CE04W16V-100M(VR)              | 1 | 394641017T  |                          |
|----------------|----------------------|--------------------------------|---|-------------|--------------------------|
| C7251          | UTSP C               | CE04W50V-10M(UTSP)             | 1 | 397581007T  |                          |
| C7252          | VR C                 | CE04W36V-10M(VR)               | 1 | 394641017T  |                          |
| C7255          | VR C                 | CE04W16V-100M(VR)              | 1 | 394644717T  |                          |
| C7262          | VRC                  | CE04W16V-470M(VR)              | 1 | 394641017T  |                          |
| C7263          | VR C                 | CE04W16V-100M(VR)              | 1 | 394641017T  |                          |
| C7265          | C-CERA C             | CK732B1A-105K                  | 1 | 337361055R2 |                          |
| C7266          | VR C                 | CE04W16V-100M(VR)              | 1 | 394641017T  |                          |
| C7341          | C-CERA C             | CK732B1A-105K                  | 1 | 337361055R2 | DC DD                    |
| C7341          | C-CERA C             | CK732B1A-103K<br>CK732B1A-105K | 1 | 337361055R2 | <dc, dd=""></dc,>        |
| C7342          | C-CERA C             | CK732B1A-105K                  | 1 | 337361055R2 | <dc, dd=""></dc,>        |
| C7351          | C-CERA C             | CK732B1A-105K                  | 1 | 337361055R2 |                          |
| C7355          | C-CERA C             | CK732B1A-103K<br>CK732B1A-105K | 1 | 337361055R2 |                          |
|                |                      |                                | 1 |             |                          |
| C7356<br>C7361 | C-CERA C<br>C-CERA C | CK732B1A-105K                  | 1 | 337361055R2 |                          |
| C7362          |                      | CK732B1A-105K                  | 1 | 337361055R2 |                          |
|                | C-CERA C             | CK732B1A-105K                  |   | 337361055R2 |                          |
| C7365          | C-CERA C             | CK732B1A-105K                  | 1 | 337361055R2 |                          |
| C7366          | C-CERA C             | CK732B1A-105K                  | 1 | 337361055R2 |                          |
| C7371          | VR C                 | CE04W16V-470M(VR)              | 1 | 394644717T  |                          |
| C7381          | VR C                 | CE04W16V-470M(VR)              | 1 | 394644717T  |                          |
| C7382          | C-CERA C             | CK725F1E-104Z1                 | 1 | 332161040R1 |                          |
| C7383          | VR C                 | CE04W16V-100M(VR)              | 1 | 394641017T  |                          |
| C7385          | VR C                 | CE04W16V-470M(VR)              | 1 | 394644717T  |                          |
| C7386          | C-CERA C             | CK725F1E-104Z1                 | 1 | 332161040R1 |                          |
| C7387          | VR C                 | CE04W16V-100M(VR)              | 1 | 394641017T  |                          |
| C7391          | C-CERA C             | CK725F1E-104Z1                 | 1 | 332161040R1 |                          |
| C7392          | VR C                 | CE04W16V-100M(VR)              | 1 | 394641017T  |                          |
| C7401          | VR C                 | CE04W16V-100M(VR)              | 1 | 394641017T  | <mp, dt="" mt,=""></mp,> |
| R101           | C-CARBON R           | RN72K1J-220JE                  | 1 | 435032204R1 | <dc, dd=""></dc,>        |
| R102           | C-CARBON R           | RN72K1J-331JE                  | 1 | 435033314R1 | <dc, dd=""></dc,>        |
| R103           | C-CARBON R           | RN72K1J-331JE                  | 1 | 435033314R1 | <dc, dd=""></dc,>        |
| R104           | C-CARBON R           | RN72K1J-331JE                  | 1 | 435033314R1 | <dc, dd=""></dc,>        |
| R105           | C-CARBON R           | RN72K1J-101JE                  | 1 | 435031014R1 | <dc, dd=""></dc,>        |
| R106           | C-CARBON R           | RN72K1J-220JE                  | 1 | 435032204R1 | <dc, dd=""></dc,>        |
| R107           | C-CARBON R           | RN72K1J-220JE                  | 1 | 435032204R1 | <dc, dd=""></dc,>        |
| R108           | C-CARBON R           | RN72K1J-220JE                  | 1 | 435032204R1 | <dc, dd=""></dc,>        |
| R109           | C-CARBON R           | RN72K1J-220JE                  | 1 | 435032204R1 | <dc, dd=""></dc,>        |
| R110           | C-CARBON R           | RN72K1J-104JE                  | 1 | 435031044R1 | <dc, dd=""></dc,>        |
| R111           | C-CARBON R           | RN72K1J-105JE                  | 1 | 435031054R1 | <dc, dd=""></dc,>        |
| R112           | C-CARBON R           | RN72K1J-681JE                  | 1 | 435036814R1 | <dc, dd=""></dc,>        |
| R113           | C-CARBON R           | RN72K1J-104JE                  | 1 | 435031044R1 | <dc, dd=""></dc,>        |
| R114           | C-CARBON R           | RN72K1J-104JE                  | 1 | 435031044R1 | <dc, dd=""></dc,>        |
| R115           | C-CARBON R           | RN72K1J-104JE                  | 1 | 435031044R1 | <dc, dd=""></dc,>        |
| R116           | C-CARBON R           | RN72K1J-220JE                  | 1 | 435032204R1 | <dc, dd=""></dc,>        |
| R117           | C-CARBON R           | RN72K1J-104JE                  | 1 | 435031044R1 | <dc, dd=""></dc,>        |
| R118           | C-CARBON R           | RN72K1J-102JE                  | 1 | 435031024R1 | <dc, dd=""></dc,>        |
| R119           | C-CARBON R           | RN72K1J-102JE                  | 1 | 435031024R1 | <dc, dd=""></dc,>        |
| R120           | C-CARBON R           | RN72K1J-101JE                  | 1 | 435031014R1 | <dc, dd=""></dc,>        |
|                |                      |                                |   |             |                          |

| R121         | C CARRON R               | RN72K1J-220JE                   | 1 | 435032204R1                | DC DD:            |
|--------------|--------------------------|---------------------------------|---|----------------------------|-------------------|
| R121<br>R122 | C-CARBON R<br>C-CARBON R | RN /2K1J-220JE<br>RN72K1J-101JE | 1 | 435032204R1<br>435031014R1 | <dc, dd=""></dc,> |
| R122<br>R123 | C-CARBON R               | RN72K1J-101JE<br>RN72K1J-220JE  | 1 | 435031014R1<br>435032204R1 | <dc, dd=""></dc,> |
|              |                          |                                 |   |                            | <dc, dd=""></dc,> |
| R124         | C-CARBON R               | RN72K1J-104JE                   | 1 | 435031044R1                | <dc, dd=""></dc,> |
| R125         | C-CARBON R               | RN72K1J-104JE                   | 1 | 435031044R1                | <dc, dd=""></dc,> |
| R126         | C-CARBON R               | RN72K1J-222JE                   | 1 | 435032224R1                | <dc, dd=""></dc,> |
| R127         | C-CARBON R               | RN72K1J-222JE                   | 1 | 435032224R1                | <dc, dd=""></dc,> |
| R128         | C-CARBON R               | RN72K1J-222JE                   | 1 | 435032224R1                | <dc, dd=""></dc,> |
| R129         | C-CARBON R               | RN72K1J-222JE                   | 1 | 435032224R1                | <dc, dd=""></dc,> |
| R130         | C-CARBON R               | RN72K1J-332JE                   | 1 | 435033324R1                | <dc, dd=""></dc,> |
| R131         | C-CARBON R               | RN72K1J-332JE                   | 1 | 435033324R1                | <dc, dd=""></dc,> |
| R132         | C-CARBON R               | RN72K1J-472JE                   | 1 | 435034724R1                | <dc, dd=""></dc,> |
| R133         | C-CARBON R               | RN72K1J-472JE                   | 1 | 435034724R1                | <dc, dd=""></dc,> |
| R135         | C-CARBON R               | RN72K1J-104JE                   | 1 | 435031044R1                | <dc, dd=""></dc,> |
| R136         | C-CARBON R               | RN72K1J-104JE                   | 1 | 435031044R1                | <dc, dd=""></dc,> |
| R137         | C-CARBON R               | RN72K1J-470JE                   | 1 | 435034704R1                | <dc, dd=""></dc,> |
| R141         | C-CARBON R               | RN72K1J-104JE                   | 1 | 435031044R1                | <dc, dd=""></dc,> |
| R142         | C-CARBON R               | RN72K1J-103JE                   | 1 | 435031034R1                | <dc, dd=""></dc,> |
| R145         | C-CARBON R               | RN72K1J-104JE                   | 1 | 435031044R1                | <dc, dd=""></dc,> |
| R150         | C-CARBON R               | RN72K1J-000JE                   | 1 | 435030004R1                | <dc, dd=""></dc,> |
| R151         | C-CARBON R               | RN72K1J-563JE                   | 1 | 435035634R1                | <dc, dd=""></dc,> |
| R152         | C-CARBON R               | RN72K1J-563JE                   | 1 | 435035634R1                | <dc, dd=""></dc,> |
| R3001        | C-CARBON R               | RN72K1J-470JE                   | 1 | 435034704R1                |                   |
| R3002        | C-CARBON R               | RN72K1J-470JE                   | 1 | 435034704R1                |                   |
| R3004        | C-CARBON R               | RN72K1J-221JE                   | 1 | 435032214R1                |                   |
| R3011        | C-CARBON R               | RN72K1J-750JE                   | 1 | 435037504R1                |                   |
| R3012        | C-CARBON R               | RN72K1J-100JE                   | 1 | 435031004R1                |                   |
| R3013        | C-CARBON R               | RN72K1J-224JE                   | 1 | 435032244R1                |                   |
| R3014        | C-CARBON R               | RN72K1J-103JE                   | 1 | 435031034R1                |                   |
| R3015        | C-CARBON R               | RN72K1J-750JE                   | 1 | 435037504R1                |                   |
| R3016        | C-CARBON R               | RN72K1J-100JE                   | 1 | 435031004R1                |                   |
| R3017        | C-CARBON R               | RN72K1J-224JE                   | 1 | 435032244R1                |                   |
| R3018        | C-CARBON R               | RN72K1J-103JE                   | 1 | 435031034R1                |                   |
| R3019        | C-CARBON R               | RN72K1J-750JE                   | 1 | 435037504R1                |                   |
| R3020        | C-CARBON R               | RN72K1J-100JE                   | 1 | 435031004R1                |                   |
| R3021        | C-CARBON R               | RN72K1J-224JE                   | 1 | 435032244R1                |                   |
| R3022        | C-CARBON R               | RN72K1J-103JE                   | 1 | 435031034R1                |                   |
| R3023        | C-CARBON R               | RN72K1J-470JE                   | 1 | 435034704R1                |                   |
| R3025        | C-CARBON R               | RN72K1J-221JE                   | 1 | 435032214R1                |                   |
| R3031        | C-CARBON R               | RN72K1J-103JE                   | 1 | 435031034R1                |                   |
| R3032        | C-CARBON R               | RN72K1J-331JE                   | 1 | 435033314R1                |                   |
| R3033        | C-CARBON R               | RN72K1J-331JE                   | 1 | 435033314R1                |                   |
| R3034        | C-CARBON R               | RN72K1J-331JE                   | 1 | 435033314R1                |                   |
| R3035        | C-CARBON R               | RN72K1J-103JE                   | 1 | 435031034R1                |                   |
| R3036        | C-CARBON R               | RN72K1J-331JE                   | 1 | 4350333314R1               |                   |
| R3037        | C-CARBON R               | RN72K1J-103JE                   | 1 | 435031034R1                |                   |
| R3041        | C-CARBON R               | RN72K1J-103JE<br>RN72K1J-102JE  | 1 | 435031034R1<br>435031024R1 |                   |
| R3041        | C-CARBON R               | RN72K1J-470JE                   | 1 | 435034704R1                |                   |
| 113042       | C-CANDON N               | NIV/ZIXIJ-4/UJE                 | 1 | 733034704KI                |                   |

| D2045 | a a l brassa | DATAMATA AAAA |   | 125021021D1 |  |
|-------|--------------|---------------|---|-------------|--|
| R3043 | C-CARBON R   | RN72K1J-102JE | 1 | 435031024R1 |  |
| R3045 | C-CARBON R   | RN72K1J-102JE | 1 | 435031024R1 |  |
| R3046 | C-CARBON R   | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3047 | C-CARBON R   | RN72K1J-221JE | 1 | 435032214R1 |  |
| R3048 | C-CARBON R   | RN72K1J-392JE | 1 | 435033924R1 |  |
| R3049 | C-CARBON R   | RN72K1J-392JE | 1 | 435033924R1 |  |
| R3050 | C-CARBON R   | RN72K1J-152JE | 1 | 435031524R1 |  |
| R3051 | C-CARBON R   | RN72K1J-331JE | 1 | 435033314R1 |  |
| R3052 | C-CARBON R   | RN72K1J-331JE | 1 | 435033314R1 |  |
| R3053 | C-CARBON R   | RN72K1J-331JE | 1 | 435033314R1 |  |
| R3054 | C-CARBON R   | RN72K1J-331JE | 1 | 435033314R1 |  |
| R3056 | C-CARBON R   | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3057 | C-CARBON R   | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3058 | C-CARBON R   | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3059 | C-CARBON R   | RN72K1J-221JE | 1 | 435032214R1 |  |
| R3060 | C-CARBON R   | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3061 | C-CARBON R   | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3065 | C-CARBON R   | RN72K1J-101JE | 1 | 435031014R1 |  |
| R3069 | C-CARBON R   | RN72K1J-101JE | 1 | 435031014R1 |  |
| R3071 | C-CARBON R   | RN72K1J-105JE | 1 | 435031054R1 |  |
| R3076 | C-CARBON R   | RN72K1J-000JE | 1 | 435030004R1 |  |
| R3081 | C-CARBON R   | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3082 | C-CARBON R   | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3083 | C-CARBON R   | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3084 | C-CARBON R   | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3085 | C-CARBON R   | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3086 | C-CARBON R   | RN72K1J-560JE | 1 | 435035604R1 |  |
| R3087 | C-CARBON R   | RN72K1J-560JE | 1 | 435035604R1 |  |
| R3091 | C-CARBON R   | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3092 | C-CARBON R   | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3093 | C-CARBON R   | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3094 | C-CARBON R   | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3095 | C-CARBON R   | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3096 | C-CARBON R   | RN72K1J-560JE | 1 | 435035604R1 |  |
| R3097 | C-CARBON R   | RN72K1J-560JE | 1 | 435035604R1 |  |
| R3098 | C-CARBON R   | RN72K1J-391JE | 1 | 435033914R1 |  |
| R3099 | C-CARBON R   | RN72K1J-391JE | 1 | 435033914R1 |  |
| R3680 | C-CARBON R   | RN72K1J-181JE | 1 | 435031814R1 |  |
| R3681 | C-CARBON R   | RN72K1J-181JE | 1 | 435031814R1 |  |
| R3682 | C-CARBON R   | RN72K1J-181JE | 1 | 435031814R1 |  |
| R3683 | C-CARBON R   | RN72K1J-181JE | 1 | 435031814R1 |  |
| R3684 | C-CARBON R   | RN72K1J-181JE | 1 | 435031814R1 |  |
| R3685 | C-CARBON R   | RN72K1J-181JE | 1 | 435031814R1 |  |
| R3686 | C-CARBON R   | RN72K1J-181JE | 1 | 435031814R1 |  |
| R3687 | C-CARBON R   | RN72K1J-181JE | 1 | 435031814R1 |  |
| R3688 | C-CARBON R   | RN72K1J-181JE | 1 | 435031814R1 |  |
| R3689 | C-CARBON R   | RN72K1J-181JE | 1 | 435031814R1 |  |
| R3690 | C-CARBON R   | RN72K1J-181JE | 1 | 435031814R1 |  |
|       |              |               |   |             |  |

| D3601 | C CAPPON P | DN/72//11 1011E                | 1 | 435031814R1                |   |
|-------|------------|--------------------------------|---|----------------------------|---|
| R3691 | C-CARBON R | RN72K1J-181JE                  | 1 |                            | *************************************** |
| R3692 | C-CARBON R | RN72K1J-181JE                  | 1 | 435031814R1                |   |
| R3693 | C-CARBON R | RN72K1J-181JE                  | 1 | 435031814R1                |   |
| R3694 | C-CARBON R | RN72K1J-181JE                  | 1 | 435031814R1                |   |
| R3695 | C-CARBON R | RN72K1J-181JE                  | 1 | 435031814R1                |   |
| R3696 | C-CARBON R | RN72K1J-181JE                  | 1 | 435031814R1                |   |
| R3697 | C-CARBON R | RN72K1J-181JE                  | 1 | 435031814R1                |   |
| R3698 | C-CARBON R | RN72K1J-181JE                  | 1 | 435031814R1                |   |
| R3699 | C-CARBON R | RN72K1J-181JE                  | 1 | 435031814R1                |   |
| R3701 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3702 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3703 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3704 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3705 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3706 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3707 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3708 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3709 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3710 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3711 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3721 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3722 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3723 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3724 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3725 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3726 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3727 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3728 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3729 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3730 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033714R1                |   |
| R3731 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3741 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3742 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3742 | C-CARBON R | RN72K1J-331JE<br>RN72K1J-331JE | 1 | 435033314R1                |   |
| R3744 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3745 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3746 | C-CARBON R | RN72K1J-331JE<br>RN72K1J-331JE | 1 | 435033314R1<br>435033314R1 |   |
|       |            |                                |   |                            |   |
| R3747 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3748 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3749 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R3750 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3751 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3761 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3762 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3763 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3764 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3765 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
| R3766 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1                |   |
|       |            |                                |   |                            |   |

| D0060 | G G L DDON' D  | DVGOVILL COLVE   |   | 10500001 ID 1 |
|-------|----------------|------------------|---|---------------|
| R3767 | C-CARBON R     | RN72K1J-331JE    | 1 | 435033314R1   |
| R3768 | C-CARBON R     | RN72K1J-331JE    | 1 | 435033314R1   |
| R3769 | C-CARBON R     | RN72K1J-470JE    | 1 | 435034704R1   |
| R3770 | C-CARBON R     | RN72K1J-331JE    | 1 | 435033314R1   |
| R3771 | C-CARBON R     | RN72K1J-103JE    | 1 | 435031034R1   |
| R3781 | C-CARBON R     | RN72K1J-103JE    | 1 | 435031034R1   |
| R3782 | C-CARBON R     | RN72K1J-331JE    | 1 | 435033314R1   |
| R3783 | C-CARBON R     | RN72K1J-331JE    | 1 | 435033314R1   |
| R3784 | C-CARBON R     | RN72K1J-331JE    | 1 | 435033314R1   |
| R3785 | C-CARBON R     | RN72K1J-331JE    | 1 | 435033314R1   |
| R3786 | C-CARBON R     | RN72K1J-331JE    | 1 | 435033314R1   |
| R3787 | C-CARBON R     | RN72K1J-331JE    | 1 | 435033314R1   |
| R3788 | C-CARBON R     | RN72K1J-331JE    | 1 | 435033314R1   |
| R3789 | C-CARBON R     | RN72K1J-470JE    | 1 | 435034704R1   |
| R3790 | C-CARBON R     | RN72K1J-331JE    | 1 | 435033314R1   |
| R3791 | C-CARBON R     | RN72K1J-103JE    | 1 | 435031034R1   |
| R3800 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3801 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3802 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3803 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3804 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3805 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3806 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3807 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3808 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3809 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3810 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3811 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3812 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3813 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3814 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3815 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3816 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3817 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3818 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3819 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3820 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3821 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3822 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3823 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3824 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3825 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3826 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3827 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3828 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3829 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3830 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
| R3831 | C-CARBON R     | RN72K1J-561JE    | 1 | 435035614R1   |
|       | 5 0.11.5 01.11 | 10.1721110 00102 | 1 |               |

|       |            |                                |   | 10-00-11                   |   |
|-------|------------|--------------------------------|---|----------------------------|---|
| R3832 | C-CARBON R | RN72K1J-561JE                  | 1 | 435035614R1                | *************************************** |
| R3833 | C-CARBON R | RN72K1J-561JE                  | 1 | 435035614R1                | *************************************** |
| R3834 | C-CARBON R | RN72K1J-561JE                  | 1 | 435035614R1                |   |
| R3835 | C-CARBON R | RN72K1J-561JE                  | 1 | 435035614R1                |   |
| R3836 | C-CARBON R | RN72K1J-561JE                  | 1 | 435035614R1                |   |
| R3837 | C-CARBON R | RN72K1J-561JE                  | 1 | 435035614R1                |   |
| R3838 | C-CARBON R | RN72K1J-561JE                  | 1 | 435035614R1                |   |
| R3839 | C-CARBON R | RN72K1J-561JE                  | 1 | 435035614R1                |   |
| R3840 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3841 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3842 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3843 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3844 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3845 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3846 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3847 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3848 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3849 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3850 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3851 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3852 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3853 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                | *************************************** |
| R3854 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3855 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3856 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3857 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3858 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3859 | C-CARBON R | RN72K1J-332JE                  | 1 | 435033324R1                |   |
| R3860 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3861 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3862 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3863 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3864 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3865 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3866 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3867 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3868 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3869 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3870 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                | *************************************** |
| R3871 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3872 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3873 | C-CARBON R | RN72K1J-103JE<br>RN72K1J-103JE | 1 | 435031034R1                |   |
| R3874 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3875 | C-CARBON R | RN72K1J-103JE<br>RN72K1J-103JE | 1 | 435031034R1<br>435031034R1 |   |
| R3876 | C-CARBON R | RN72K1J-103JE<br>RN72K1J-103JE | 1 | 435031034R1<br>435031034R1 |   |
| R3877 | C-CARBON R | RN72K1J-103JE<br>RN72K1J-103JE | 1 | 435031034R1<br>435031034R1 |   |
|       |            |                                |   |                            |   |
| R3878 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R3879 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |

| <b>D</b> 2000 | G G L DDOLL D | DATE AND THE PROPERTY OF THE P |   | 10500100 (D1 |
|---------------|---------------|--|---|--------------|
| R3880         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3881         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3882         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3883         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3884         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3885         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3886         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3887         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3888         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3889         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3890         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3891         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3892         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3893         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3894         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3895         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3896         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3897         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3898         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3899         | C-CARBON R    | RN72K1J-103JE  | 1 | 435031034R1  |
| R3900         | C-CARBON R    | RN72K1J-152JE  | 1 | 435031524R1  |
| R3901         | C-CARBON R    | RN72K1J-152JE  | 1 | 435031524R1  |
| R3902         | C-CARBON R    | RN72K1J-152JE  | 1 | 435031524R1  |
| R3903         | C-CARBON R    | RN72K1J-152JE  | 1 | 435031524R1  |
| R3904         | C-CARBON R    | RN72K1J-152JE  | 1 | 435031524R1  |
| R3905         | C-CARBON R    | RN72K1J-152JE  | 1 | 435031524R1  |
| R3906         | C-CARBON R    | RN72K1J-152JE  | 1 | 435031524R1  |
| R3907         | C-CARBON R    | RN72K1J-152JE  | 1 | 435031524R1  |
| R3908         | C-CARBON R    | RN72K1J-152JE  | 1 | 435031524R1  |
| R3909         | C-CARBON R    | RN72K1J-152JE  | 1 | 435031524R1  |
| R3910         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3911         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3912         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3913         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3914         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3915         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3916         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3917         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3918         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3919         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3920         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3921         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3922         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3923         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3924         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3925         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3926         | C-CARBON R    | RN72K1J-223JE  | 1 | 435032234R1  |
| R3927         | C-CARBON R    | RN72K1J-223JE<br>RN72K1J-223JE   | 1 | 435032234R1  |
| 113741        | C-C/MDOM K    | RIV/ARIJ=AAJJE   | 1 | 13303243TK1  |

|                |            |                                |   | I a a a a a a a a a a a a a a a a a a a |   |
|----------------|------------|--------------------------------|---|---|---|
| R3928          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             | *************************************** |
| R3929          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             | *************************************** |
| R3930          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3931          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3932          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3933          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3934          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3935          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3936          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3937          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3938          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3939          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3940          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3941          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3942          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3943          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3944          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3945          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3946          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3947          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3948          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3949          | C-CARBON R | RN72K1J-223JE                  | 1 | 435032234R1                             |   |
| R3950          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3951          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3952          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3953          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3954          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3955          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3956          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3957          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3958          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3959          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3960          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3961          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3962          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3963          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3964          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3965          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3966          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3967          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3968          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3969          | C-CARBON R | RN72K1J-152JE                  | 1 | 435031524R1                             |   |
| R3970          | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                             |   |
| R3971          | C-CARBON R | RN72K1J-220JE<br>RN72K1J-220JE | 1 | 435032204R1                             |   |
| R3972          | C-CARBON R | RN72K1J-220JE<br>RN72K1J-220JE | 1 | 435032204R1<br>435032204R1              |   |
| R3973          | C-CARBON R | RN72K1J-220JE<br>RN72K1J-220JE | 1 | 435032204R1<br>435032204R1              |   |
| R3974          | C-CARBON R | RN72K1J-220JE<br>RN72K1J-220JE | 1 | 435032204R1<br>435032204R1              |   |
| R3974<br>R3975 | C-CARBON R | RN72K1J-220JE<br>RN72K1J-220JE | 1 | 435032204R1<br>435032204R1              |   |
| K39/3          | C-CARDON K | KIN/ZKIJ-ZZUJE                 | 1 | 4330342U4K1                             |   |

| R3976 | C-CARBON R  | RN72K1J-220JE | 1 | 435032204R1 |
|-------|-------------|---------------|---|-------------|
| R3977 | C-CARBON R  | RN72K1J-220JE | 1 | 435032204R1 |
| R3978 | C-CARBON R  | RN72K1J-220JE | 1 | 435032204R1 |
| R3979 | C-CARBON R  | RN72K1J-220JE | 1 | 435032204R1 |
| R3980 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R3981 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R3982 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R3983 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R3984 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R3985 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R3986 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R3987 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R3988 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R3989 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4201 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4202 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4203 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4204 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4205 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4206 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4207 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4208 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4253 | C-CARBON R  | RN72K1J-182JE | 1 | 435031824R1 |
| R4254 | C-CARBON R  | RN72K1J-182JE | 1 | 435031824R1 |
| R4255 | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 |
| R4256 | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 |
| R4291 | NF CARBON R | R25J-22       | 1 | 415472204T  |
| R4292 | NF CARBON R | R25J-22       | 1 | 415472204T  |
| R4293 | C-CARBON R  | RN72K1J-152JE | 1 | 435031524R1 |
| R4294 | C-CARBON R  | RN72K1J-152JE | 1 | 435031524R1 |
| R4720 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4721 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4722 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4723 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4724 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4725 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4726 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4727 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4730 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4731 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4732 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4733 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4734 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4735 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4736 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4737 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R4740 | METAL O R   | RS1/2WBJ-22   | 1 | 443522204T  |
| R4741 | METAL O R   | RS1/2WBJ-22   | 1 | 443522204T  |
|       |             |               |   |             |

| R7001          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                | <dc, dd=""></dc,> |
|----------------|--------------------------|--------------------------------|---|----------------------------|-------------------|
| R7002          | C-CARBON R               | RN72K1J-470JE<br>RN72K1J-470JE | 1 | 435034704R1                | <dc, dd=""></dc,> |
| R7003          | C-CARBON R               | RN72K1J-470JE<br>RN72K1J-470JE | 1 | 435034704R1                | <dc, dd=""></dc,> |
| R7005          | C-CARBON R               | RN72K1J-470JE<br>RN72K1J-470JE | 1 | 435034704R1                | <dc, dd=""></dc,> |
| R7006          | C-CARBON R               | RN72K1J-4703E<br>RN72K1J-221JE | 1 | 435032214R1                | <dc, dd=""></dc,> |
| R7007          | C-CARBON R               | RN72K1J-2211E<br>RN72K1J-470JE | 1 | 435034704R1                | DC DD             |
| R7007          | C-CARBON R               | RN72K1J-470JE<br>RN72K1J-221JE | 1 | 435032214R1                | <dc, dd=""></dc,> |
| R7008          | C-CARBON R               | RN72K1J-221JE<br>RN72K1J-102JE | 1 | 435031024R1                |                   |
| R7011          | C-CARBON R               |                                |   | 435031024R1<br>435031024R1 |                   |
|                |                          | RN72K1J-102JE                  | 1 |                            | 52.55             |
| R7013<br>R7014 | C-CARBON R<br>C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1<br>435034704R1 | <dc, dd=""></dc,> |
|                |                          | RN72K1J-470JE                  |   |                            | <dc, dd=""></dc,> |
| R7016          | C-CARBON R               | RN72K1J-103JE                  | 1 | 435031034R1                |                   |
| R7017          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7018          | C-CARBON R               | RN72K1J-221JE                  | 1 | 435032214R1                |                   |
| R7024          | C-CARBON R               | RN72K1J-103JE                  | 1 | 435031034R1                |                   |
| R7025          | C-CARBON R               | RN72K1J-224JE                  | 1 | 435032244R1                |                   |
| R7026          | C-CARBON R               | RN72K1J-224JE                  | 1 | 435032244R1                |                   |
| R7027          | C-CARBON R               | RN72K1J-472JE                  | 1 | 435034724R1                |                   |
| R7030          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7031          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7032          | C-CARBON R               | RN72K1J-221JE                  | 1 | 435032214R1                |                   |
| R7033          | C-CARBON R               | RN72K1J-221JE                  | 1 | 435032214R1                |                   |
| R7034          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7035          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7036          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7037          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7038          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7040          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7042          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7043          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7044          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7045          | C-CARBON R               | RN72K1J-221JE                  | 1 | 435032214R1                |                   |
| R7046          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7048          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7049          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7050          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7051          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7052          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7053          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7054          | C-CARBON R               | RN72K1J-103JE                  | 1 | 435031034R1                |                   |
| R7055          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7062          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7063          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7064          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7065          | C-CARBON R               | RN72K1J-103JE                  | 1 | 435031034R1                |                   |
| R7069          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7070          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
| R7071          | C-CARBON R               | RN72K1J-470JE                  | 1 | 435034704R1                |                   |
|                |                          |                                |   |                            |                   |

| D7072          | CCARRONER  | DN/70V11 4701E                 | 1 | 425024704B1                |   |
|----------------|------------|--------------------------------|---|----------------------------|---|
| R7072          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7073<br>R7075 | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7077          | C-CARBON R | RN72K1J-470JE                  |   | 435034704R1                |   |
|                | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7078          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7079          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7080          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7081          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7082          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7083          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7084          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7085          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7086          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7087          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7088          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7089          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7090          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7092          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7094          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7095          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7096          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7097          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7098          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7099          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7100          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7101          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7102          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7103          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7104          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7105          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7106          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7107          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7108          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7109          | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1                |   |
| R7110          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R7111          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R7112          | C-CARBON R | RN72K1J-563JE                  | 1 | 435035634R1                |   |
| R7113          | C-CARBON R | RN72K1J-333JE                  | 1 | 435033334R1                | <dc, dd=""></dc,>                       |
| R7113          | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                | <mp, dt,="" mt,="" na906=""></mp,>      |
| R7119          | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                | 221, 111, 121, 111, 111, 111, 111, 111, |
| R7120          | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |   |
| R7121          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7122          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7123          | C-CARBON R | RN72K1J-470JE<br>RN72K1J-470JE | 1 | 435034704R1                |   |
| R7124          | C-CARBON R | RN72K1J-470JE<br>RN72K1J-221JE | 1 | 435032214R1                |   |
| R7124          | C-CARBON R | RN72K1J-470JE                  | 1 | 435034704R1                |   |
| R7126          | C-CARBON R | RN72K1J-470JE<br>RN72K1J-470JE | 1 | 435034704R1<br>435034704R1 |   |
| R7127          | C-CARBON R | RN72K1J-470JE<br>RN72K1J-221JE | 1 | 435032214R1                |   |
| K/12/          | C-CARDUN K | KIN/ZKIJ-ZZIJE                 | 1 | 433U3ZZ14K1                |   |

|       | ~ ~        |               |   |             |
|-------|------------|---------------|---|-------------|
| R7128 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |
| R7129 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7131 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7133 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R7134 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R7135 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R7136 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R7137 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |
| R7138 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7139 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7141 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7144 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |
| R7151 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7152 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7153 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7154 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7155 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7156 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7157 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7158 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7161 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7162 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7163 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7164 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7167 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7171 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7172 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7173 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7174 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7175 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7176 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7177 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7178 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R7181 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R7182 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R7183 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R7184 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R7185 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R7186 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R7187 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R7188 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R7189 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |
| R7190 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |
| R7191 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |
| R7192 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R7193 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R7194 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R7195 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
|       |            |               |   |             |

| R7196  | C-CARBON R | RN72K1J-104JE    | 1 | 435031044R1 |                             |
|--------|------------|------------------|---|-------------|-----------------------------|
| R7197  | C-CARBON R | RN72K1J-104JE    | 1 | 435031044R1 |                             |
| R7198  | C-CARBON R | RN72K1J-561JE    | 1 | 435035614R1 |                             |
| R7201  | METAL R    | RNU1/2WCJ-2.2    | 1 | 453530224T  |                             |
| R7202  | C-CARBON R | RN72K1J-102JE    | 1 | 435031024R1 |                             |
| R7203  | C-CARBON R | RN72K1J-392JE    | 1 | 435033924R1 |                             |
| R7204  | C-CARBON R | RN72K1J-272JE    | 1 | 435032724R1 |                             |
| R7205  | C-CARBON R | RN72K1J-472JE    | 1 | 435034724R1 |                             |
| R7210  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| R7211  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| R7212  | C-CARBON R | RN72K1J-333JE    | 1 | 435033334R1 |                             |
| R7213  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 | <dc, dd,="" na906=""></dc,> |
| R7221  | METAL R    | RNU1/2WCJ-2.2    | 1 | 453530224T  | (DC, DD, 141500)            |
| R7222  | C-CARBON R | RN72K1J-102JE    | 1 | 435031024R1 |                             |
| R7223  | C-CARBON R | RN72K1J-392JE    | 1 | 435033924R1 |                             |
| R7224  | C-CARBON R | RN72K1J-272JE    | 1 | 435032724R1 |                             |
| R7225  | C-CARBON R | RN72K1J-472JE    | 1 | 435034724R1 |                             |
| R7230  | C-CARBON R | RN72K1J-000JE    | 1 | 435030004R1 | <dc, dd,="" na906=""></dc,> |
| R7231  | METAL R    | RNU1/2WCJ-0.22   | 1 | 453532294T  | (DC, DD, NA900>             |
| R7232  | C-CARBON R | RN72K1J-102JE    | 1 | 435031024R1 |                             |
| R7233  | C-CARBON R | RN72K1J-392JE    | 1 | 435033924R1 |                             |
| R7234  | C-CARBON R | RN72K1J-563JE    | 1 | 435035634R1 |                             |
| R7235  | C-CARBON R | RN72K1J-562JE    | 1 | 435035624R1 |                             |
| R7236  | C-CARBON R | RN72K1J-273JE    | 1 | 435032734R1 | <dc, dd=""></dc,>           |
| R7237  | C-CARBON R | RN72K1J-334JE    | 1 | 435032754R1 | <dc, dd=""></dc,>           |
| R7238  | C-CARBON R | RN72K1J-334JE    | 1 | 435033344R1 | <dc, dd=""></dc,>           |
| R7241  | METAL O R  | RS1/2WBJ-56      | 1 | 443525604T  | CDC, DD2                    |
| R7245  | METAL R    | RNU1/2WCJ-2.7    | 1 | 453530274T  |                             |
| R7246  | METAL R    | RNU1/2WCJ-2.7    | 1 | 453530274T  |                             |
| R7247  | METAL R    | RNU1/2WCJ-2.7    | 1 | 453530274T  |                             |
| R7248  | METAL R    | RNU1/2WCJ-2.7    | 1 | 453530274T  |                             |
| R7251  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| R7252  | METAL O R  | RS1/2WBJ-22      | 1 | 443522204T  |                             |
| R7255  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| R7256  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| R7261  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| R7262  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 | <dc, dd,="" na906=""></dc,> |
| R7263  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 | <dc, dd,="" na906=""></dc,> |
| R7264  | C-CARBON R | RN72K1J-273JE    | 1 | 435032734R1 | (DC, DD, NA7002             |
| R7265  | C-CARBON R | RN72K1J-273JE    | 1 | 435032734R1 |                             |
| R7266  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| R7267  | C-CARBON R | RN72K1J-473JE    | 1 | 435034734R1 |                             |
| R7268  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| R7269  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| R7272  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| R7273  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| R7275  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| R7278  | C-CARBON R | RN72K1J-103JE    | 1 | 435031034R1 |                             |
| 11/2/0 | C-CINDON K | IXIV/ZIXIJ*1UJJE | 1 | 133031034K1 |                             |

| <dc, dd=""></dc,>                  |
|------------------------------------|
| <mp, dt,="" mt,="" na906=""></mp,> |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
| <dc, dd=""></dc,>                  |
| <dc, dd=""></dc,>                  |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
|                                    |
| <dc, dd=""></dc,>                  |
|                                    |

| D        | a a l bbox b | DATAWAY OOM                      |     | 105000001D1 |   |
|----------|--------------|----------------------------------|-----|-------------|---|
| R7411    | C-CARBON R   | RN72K1J-000JE                    | 1   | 435030004R1 | <mp, dt="" mt,=""></mp,>                |
| R7412    | C-CARBON R   | RN72K1J-000JE                    | 1   | 435030004R1 | <dc, dd=""></dc,>                       |
| R7413    | C-CARBON R   | RN72K1J-000JE                    | 1   | 435030004R1 | <nr906></nr906>                         |
| R7414    | C-CARBON R   | RN72K1J-000JE                    | 1   | 435030004R1 | <nr906></nr906>                         |
| R7415    | C-CARBON R   | RN72K1J-222JE                    | 1   | 435032224R1 | <mp, dt="" mt,=""></mp,>                |
| R7416    | C-CARBON R   | RN72K1J-222JE                    | 1   | 435032224R1 | <mp, dt="" mt,=""></mp,>                |
| R7417    | C-CARBON R   | RN72K1J-392JE                    | 1   | 435033924R1 | <mp, dt="" mt,=""></mp,>                |
| R7418    | C-CARBON R   | RN72K1J-392JE                    | 1   | 435033924R1 | <mp, dt="" mt,=""></mp,>                |
| R7421    | C-CARBON R   | RN72K1J-000JE                    | 1   | 435030004R1 |   |
| R7425    | C-CARBON R   | RN72K1J-000JE                    | 1   | 435030004R1 | <mp, dt="" mt,=""></mp,>                |
| R7427    | C-CARBON R   | RN72K1J-000JE                    | 1   | 435030004R1 |   |
| E101     | TRM(SCREW)   | NEJITANSI M3                     | 1   | 25065425    | <dc, dd=""></dc,>                       |
| E102     | TRM(SCREW)   | NEJITANSI M3                     | 1   | 25065425    | <dc, dd=""></dc,>                       |
| JL9501A  | SOCKET       | NSCT-6P111                       | 1   | 25050283    |   |
| P101B    | SOCKET       | NSCT-13P2106                     | 1   | 25052209    | <nr906></nr906>                         |
| P101Bor  | SOCKET       | NSCT-13P1607                     | (1) | 25051820    | <nr906></nr906>                         |
| P102A    | SOCKET       | NSCT-18P2148                     | 1   | 25052251    | <dc, dd=""></dc,>                       |
| P102Aor  | SOCKET       | NSCT-18P1649                     | (1) | 25051862    | <dc, dd=""></dc,>                       |
| P102B    | SOCKET       | NSCT-18P2111                     | 1   | 25052214    | <dc, dd=""></dc,>                       |
| P102Bor  | SOCKET       | NSCT-18P1612                     | (1) | 25051825    | <dc, dd=""></dc,>                       |
| P121     | SOCKET       | YKF51-5397N                      | 1   | 25053201    | <dc, dd=""></dc,>                       |
| P122     | SOCKET       | CAM-C16                          | 1   | 25053104R2  | <dc, dd=""></dc,>                       |
| P122A    | RETAINER     | (XM)                             | 1   | 27142048    | <dc, dd=""></dc,>                       |
| P2010B   | SOCKET       | IMSA-9142S-24A                   | 1   | 25053234    |   |
| P202B    | PLUG         | NPLG-6P134                       | 1   | 25055150    |   |
| P205B    | SOCKET       | NSCT-9P2206                      | 1   | 25052309    |   |
| P205Bor  | SOCKET       | NSCT-9P2400                      | (1) | 25052503    |   |
| P2998    | TRM          | NTM-1P232(M1700)                 | 1   | 25060301    |   |
| P2999    | TRM          | NTM-1P232(M1700)                 | 1   | 25060301    |   |
| P3001    | PIN JACK     | NPJ-3PDO657                      | 1   | 25045885    |   |
| P3001 or | PIN JACK     | NPJ-3PDO431                      | (1) | 25045624    |   |
| P3002    | ST JACK      | MSJ-035-22                       | 1   | 25045887    |   |
| P3002 or | JACK         | YKB21-5130                       | (1) | 25045387    |   |
| P3003    | SOCKET       | 7906-09FHA                       | 1   | 25053103    |   |
| P3101A   | PLUG         | IMSA-9142B-24A                   | 1   | 25056602    |   |
| P3102A   | PLUG         | IMSA-9142B-14A                   | 1   | 25056597    |   |
| P3103A   | PLUG         | IMSA-9142B-16A                   | 1   | 25056598    |   |
| P3801A   | PLUG         | IMSA-9855B-30D-T                 | 1   | 25056604    |   |
| P3802A   | PLUG         | IMSA-9855B-30D-T                 | 1   | 25056604    |   |
| P4020B   | SOCKET       | IMSA-9142S-26A                   | 1   | 25053235    | *************************************** |
| P4021B   | SOCKET       | IMSA-9142S-26A                   | 1   | 25053235    |   |
| P4032B   | SOCKET       | NSCT-8P1023                      | 1   | 25051233    |   |
| P4033B   | SOCKET       | NSCT-13P1028                     | 1   | 25051238    |   |
| P4110    | SOCKET       | 9210B-1-10Z140-PT1               | 1   | 25053247    |   |
| P4111    | SOCKET       | 9210B-1-09Z140-PT1               | 1   | 25053249    |   |
| P6851A   | PLUG         | IMSA-9142B-20A                   | 1   | 25056600    |   |
| P6852A   | PLUG         | IMSA-9142B-20A                   | 1   | 25056600    |   |
| P6853A   | PLUG         | IMSA-9142B-20A<br>IMSA-9142B-20A | 1   | 25056600    |   |
| 1 0033A  | 1 LUU        | 11VIOA-7142D-2UA                 | 1   | 23030000    |   |

| P7001  | SOCKET     | NSCT-9P2427  | 1 | 25052530 |  |
|--------|------------|--------------|---|----------|--|
| P7002  | TRM(SCREW) | NEJITANSI M3 | 1 | 25065425 |  |
| P7210B | PLUG       | NPLG-9P356   | 1 | 25055373 |  |
| P7501A | SOCKET     | NSCT-40P2170 | 1 | 25052273 |  |
| P8002A | PLUG       | NPLG-15P667  | 1 | 25055711 |  |

| U33 | DISPLAY PC BOARD (NADIS-9085-1C/1H)     |
|-----|---|
| U34 | DISPLAY PC BOARD (NADIS-9086-1C/1H)     |
| U35 | SWITCH PC BOARD (NASW-9087-1C/1H)       |
| U36 | HEADPHONE PC BOARD (NAETC-9088-1C/1H)   |
| U37 | POWER SUPPLY PC BOARD (NAPS-9089-1C/1H) |
| U38 | FRONT OPT PC BOARD (NAETC-9090-1C/1H)   |
| U39 | VOLUME PC BOARD (NAETC-9091-1C/1H)      |

| Q7500 FL T  | MO SENS<br>FUBE<br>LDER | TORX177L  NJL34H380A  HNA-16SL04T  (FL)  M66005-0001AHP  M66005-0001AHP  2SC2712-GR 2SC2712-Y(TE85L_F) | 1<br>1<br>1<br>1<br>1<br>1 | 24120127<br>241365<br>212266<br>27191303<br>22242208R3<br>22242208R3 |  |
|---|-------------------------|--|----------------------------|--|--|
| Q7500         FL T           Q7500A         HOL           Q7501         IC           Q7502         IC           Q7503         TR           Q7503 or         TR           Q7504         TR | TUBE<br>LDER            | HNA-16SL04T<br>(FL)<br>M66005-0001AHP<br>M66005-0001AHP<br>2SC2712-GR<br>2SC2712-Y(TE85L_F)            | 1<br>1<br>1<br>1           | 212266<br>27191303<br>22242208R3<br>22242208R3                       |  |
| Q7500A         HOL           Q7501         IC           Q7502         IC           Q7503         TR           Q7503 or         TR           Q7504         TR                              | LDER                    | (FL) M66005-0001AHP M66005-0001AHP 2SC2712-GR 2SC2712-Y(TE85L_F)                                       | 1<br>1<br>1                | 27191303<br>22242208R3<br>22242208R3                                 |  |
| Q7501         IC           Q7502         IC           Q7503         TR           Q7503 or         TR           Q7504         TR   |                         | M66005-0001AHP<br>M66005-0001AHP<br>2SC2712-GR<br>2SC2712-Y(TE85L_F)                                   | 1                          | 22242208R3<br>22242208R3   |  |
| Q7502 IC<br>Q7503 TR<br>Q7503 or TR<br>Q7504 TR   |                         | M66005-0001AHP<br>2SC2712-GR<br>2SC2712-Y(TE85L_F)   | 1                          | 22242208R3   |  |
| Q7503 TR<br>Q7503 or TR<br>Q7504 TR   |                         | 2SC2712-GR<br>2SC2712-Y(TE85L_F)   |                            |  |  |
| Q7503 or TR<br>Q7504 TR   |                         | 2SC2712-Y(TE85L_F)   | 1                          |  |  |
| Q7504 TR  |                         |  |                            | 2213145R2  |  |
|   |                         |  | (1)                        | 2213144R2  |  |
| Q7504 or TR   |                         | 2SC2712-GR   | 1                          | 2213145R2  |  |
|   |                         | 2SC2712-Y(TE85L_F)   | (1)                        | 2213144R2  |  |
| Q7520 IC  |                         | NE5532APSR   | 1                          | 22242283R2   |  |
| Q7530 IC  |                         | NJM4580M-D   | 1                          | 22241448R2   |  |
| Q7532 TR  |                         | RN1441   | 1                          | 2215410R2  |  |
| Q7533 TR  |                         | RN2403   | 1                          | 2214540R2  |  |
| Q7533 or TR   |                         | DTA124EKA  | (1)                        | 2216240R2  |  |
| Q7533 or TR   |                         | KRA103S  | (1)                        | 2216230R2  |  |
| Q7591 TR  |                         | DTC123JKA  | 1                          | 2216690R2  |  |
| Q7592 TR  |                         | DTC123JKA  | 1                          | 2216690R2  |  |
| Q7593 TR  |                         | DTC123JKA  | 1                          | 2216690R2  |  |
| Q7597 TR  |                         | DTC123JKA  | 1                          | 2216690R2  |  |
| Q7598 TR  |                         | DTC123JKA  | 1                          | 2216690R2  |  |
| Q7611 IC  |                         | TC74VHC08F(EL_K_F)   | 1                          | 22242492R2   |  |
| Q9301 TR  |                         | 2SC2235-Y(TPE6_F)  | 1                          | 2211654T   |  |
| Q9301 or TR   |                         | 2SC2235-O(TPE6_F)  | (1)                        | 2211653T   |  |
| D7500 ZEN   | VER D                   | UDZS10B  | 1                          | 224551000R2  |  |
| D7520 C-DI  | IODE                    | 1SS355   | 1                          | 223269R2   |  |
| D7520 or C-DI   | IODE                    | MA2J1110GL   | (1)                        | 223302R2   |  |
| D7521 C-DI  | IODE                    | 1SS355   | 1                          | 223269R2   |  |
| D7521 or C-DI   | IODE                    | MA2J1110GL   | (1)                        | 223302R2   |  |
| D7522 C-DI  | IODE                    | 1SS355   | 1                          | 223269R2   |  |
| D7522 or C-DI   | IODE                    | MA2J1110GL   | (1)                        | 223302R2   |  |
| D7523 C-DI  | IODE                    | 1SS355   | 1                          | 223269R2   |  |
| D7523 or C-DI   | JODE                    | MA2J1110GL   | (1)                        | 223302R2   |  |

| D7531   | D7530    | ZENER D    | UDZS5.1B             | 1   | 224550510R2 |                                    |
|---|----------|------------|----------------------|-----|-------------|------------------------------------|
| D7552   C.DIODE   ISSS55   1   23309R2  | D7531    | C-DIODE    | 1SS355               | 1   | 223269R2    |                                    |
| D7552 or C. DIODE         MAZILIOGI.         (1)         23300R2           D7560 or C. DIODE         ISS355         1         222669R2           D7561 or C. DIODE         ISS355         1         222569R2           D7561 or C. DIODE         ISS355         1         22360R2           D7570 or C. DIODE         MAZILIOGI.         (1)         22330R2           D7580 or C. DIODE         ISS355         1         223568           D7580 or C. DIODE         MAZILIOGI.         (1)         22330R2           D7581 or C. DIODE         MAZILIOGI.         (1)         22330R2           D7581 or C. DIODE         MAZILIOGI.         (1)         22330R2           D7581 or C. DIODE         MAZILIOGI.         (1)         22330R2           D7582 or C. DIODE         MAZILIOGI.         (1)         22330R2           D7583 or C. DIODE         MAZILIOGI.         (1)         22330R2           D7583 or C. DIODE         MAZILIOGI.         (1)         22330R2           D7583 or C. DIODE         MAZILIOGI.         (1)         22340R2           D7583 or C. DIODE         MAZILIOGI.         (1)         223473           D7593 or LED         SPRBADOCOMO-BECEFF         1         22473 <td< td=""><td>D7531 or</td><td>C-DIODE</td><td>MA2J1110GL</td><td>(1)</td><td>223302R2</td><td></td></td<>  | D7531 or | C-DIODE    | MA2J1110GL           | (1) | 223302R2    |                                    |
| D7560   | D7532    | C-DIODE    | 1SS355               | 1   | 223269R2    |                                    |
| D7550 α         C.DIDDE         M.AZJILIOGL         (1)         223268R2           D7561 α         C.DIDDE         ISS355         1         223268R2           D7570 α         C.DIDDE         M.AZJILIOGL         (1)         2330R2           D7570 α         C.DIODE         ISS355         1         223268R2           D7580 α         C.DIODE         M.AZJILIOGL         (1)         22330R2           D7581 α         C.DIODE         ISS355         1         223268R2           D7582 α         C.DIODE         ISS355         1         223268R2           D7582 α         C.DIODE         ISS355         1         223268R2           D7582 α         C.DIODE         ISS355         1         223268R2           D7583 α         C.DIODE         ISS355         1         223268R2           D7583 α         C.DIODE         MAZJILIOGL         (1)         22330R2           D7583 α         C.DIODE         MAZJILIOGL         (1)         223473           D7590 α         LED         SPP3DDC0000-ABCDEF         1         22473           D7590 α         LED         SPR3DDC0000-ABCDEF         1         225473           D7590 α         LED         SLR-34  | D7532 or | C-DIODE    | MA2J1110GL           | (1) | 223302R2    |                                    |
| D7561         C. DIDDE         INSAS5T         1         22280R2           D7561 or         SRCF D         SIR-34STF         1         225456           D7580         C. DIODE         ISSAS5T         1         22320R2           D7580 or         C. DIODE         ISSAS5         1         22320R2           D7581 or         C. DIODE         MA21110GL         (1)         22330R2           D7581 or         C. DIODE         MA21110GL         (1)         22330R2           D7582 or         C. DIODE         MA21110GL         (1)         22330R2           D7583 or         C. DIODE         MA21110GL         (1)         22330R2           D7580 or         C. DIODE         MA21110GL         (1)         22340R2           D7593 or         LED         SDP3DD0C0000-ABCDEF         1         225473           D7590 or         LED         SIR-342MGTEPP         1         225455T         -OC, DD-           D7593   | D7560    | C-DIODE    | 1SS355               | 1   | 223269R2    |                                    |
| D7561 or         C-DIODE         MA2II110GL         (1)         223408P2           D7570         SPCF D         SIR-34ST3F         1         225466           D7580 or         C-DIODE         ISS35         1         223269R2           D7581 or         C-DIODE         MA2II110GL         (1)         22330R2           D7581 or         C-DIODE         MA2II110GL         (1)         22330R2           D7582 or         C-DIODE         MA2II110GL         (1)         22330R2           D7583 or         C-DIODE         MA2II110GL         (1)         22330R2           D7590 or         LED         SDPB3DDC0000-ABCDEF         1         225473           D7591 br         LED         SDPB3DDC00000-ABCDEF         1         225473           D7592 br         LED         SLR-342MGTE7P         1         225457 <dc, dd-<="" td="">           D7593 or         LED         SLR-342MGTE7P         1         225457         <dc, dd-<="" td=""></dc,></dc,>  | D7560 or | C-DIODE    | MA2J1110GL           | (1) | 223302R2    |                                    |
| D7570         SPCF D         SIR-34STSF         1         225456           D7580         C-DIODE         ISS355         1         22300R2           D7581         C-DIODE         ISS355         1         223200R2           D7581         C-DIODE         ISS355         1         223209R2           D7581 or C-DIODE         MA2II110GL         (1)         22330R2           D7582 or C-DIODE         MA2II110GL         (1)         22330R2           D7583 or C-DIODE         MA2II110GL         (1)         22330R2           D7594 LED         SDP35DD0C0000-ABCDEF         1         225473           D7591 LED         SDP35DD0C0000-ABCDEF         1         225473           D7592 LED         SLR-342MGTEPP         1         225455T <dc, dd-<="" td="">           D7593 LED         SLR-342MGTEPP         1         225455T         <dc, dd-<="" td="">           D7593 or LED         SEL410G<td>D7561</td><td>C-DIODE</td><td>1SS355</td><td>1</td><td>223269R2</td><td></td></dc,></dc,>   | D7561    | C-DIODE    | 1SS355               | 1   | 223269R2    |                                    |
| D7580         C-DIODE         ISS35S         I         23236R2           D7580 or         C-DIODE         MAZIIIIOGL         (1)         22330R2           D7581 or         C-DIODE         MAZIIIIOGL         (1)         22330R2           D7582 or         C-DIODE         MAZIIIIOGL         (1)         22330R2           D7582 or         C-DIODE         MAZIIIIOGL         (1)         22330R2           D7583 or         C-DIODE         ISS35S         I         22330R2           D7583 or         C-DIODE         ISS35S         I         22330R2           D7580 or         C-DIODE         MAZIIIIOGL         (1)         22330R2           D7590 delto         SDP83DD0C0000-ABCDEF         I         225473           D7590 delto         CDC DD         SDP83DD0C0000-ABCDEF         I         225473           D7591 delto         SDP83DD0C0000-ABCDEF         I         225473         DC, DD           D7592 LED         SLR-342MGTE7P         I         225455T         CDC, DD           D7593 LED         SLR-342MGTE7P         I         225455T         CDC, DD           D7593 or         LED         SEL4310G-D         (1)         22545T         CDC, DD   | D7561 or | C-DIODE    | MA2J1110GL           | (1) | 223302R2    |                                    |
| D7580 or CDIODE         MA2JI110GL         (1)         23302R2           D7581 or CDIODE         ISS355         I         23230R2           D7582 or CDIODE         ISS355         I         23230R2           D7582 or CDIODE         ISS355         I         23230R2           D7583 or CDIODE         MA2JI110GL         (1)         23330R2           D7583 or CDIODE         MA2JI110GL         (1)         22330R2           D7583 or CDIODE         MA2JI110GL         (1)         22330R2           D7583 or CDIODE         MA2JI110GL         (1)         22330R2           D7589 or LED         SDPBSDDC00000-ABCDEF         I         225473           D7590     LED         SDPBSDDC0000-ABCDEF         I         225473           D7591     LED         SLR 342MGTE7P         I         225437           D7592     LED         SLR 342MGTE7P         I         225457           D7593     LED         SLR 342MGTE7P         I         225457           D7593     LED         SLR 342MGTE7P         I         225457 <dc, dd-<="" td="">           D7593     LED         SLA 340MGTE7P         I         225457         <dc, dd-<="" td="">           D7593     CLED         SLA 340GE         (1)         225457</dc,></dc,>  | D7570    | SPCF D     | SIR-34ST3F           | 1   | 225456      |                                    |
| D7581         C-DIODE         ISS355         1         23269R2           D7581 or         C-DIODE         MAZHILIOGL         (1)         22330R2           D7582 or         C-DIODE         ISS355         1         22336R2           D7583 or         C-DIODE         MAZHILIOGL         (1)         22330R2           D7583 or         C-DIODE         MAZHILIOGL         (1)         22330R2           D7583 or         C-DIODE         MAZHILIOGL         (1)         22330ZR2           D7590 or         LED         SDPBSDD0C0000-ABCDEF         1         225473           D7590 LED         SDPBSDD0C0000-ABCDEF         1         225473           D7591 LED         SDPBSDD0C0000-ABCDEF         1         225473           D7592 LED         SLR-342MGTE7P         1         225457         -DC, DD-           D7593 LED         SLR-342MGTE7P         1         225457         -DC, DD-           D7593 or         LED         SLR-342MGTE7P         1         225457         -DC, DD-           D7593 or         LED         SLR-342MGTE7P         1         225457         -DC, DD-           D7593 or         LED         SLA310G-D         (1)         225457         -DC, DD-   | D7580    | C-DIODE    | 1SS355               | 1   | 223269R2    |                                    |
| D7581 or         C-DIODE         MA2J1110GL         (1)         22330R2           D7582         C-DIODE         ISS355         1         223269R2           D7583 or         C-DIODE         MS2J1110GL         (1)         22320R2           D7583 or         C-DIODE         ISS355         1         223269R2           D7583 or         C-DIODE         MA2J1110GL         (1)         223269R2           D7590 LED         SDPB3DDC00000-ABCDEF         1         225473           D7590 LED         SDPB3DDC00000-ABCDEF         1         225473           D7590 LED         SDPB3DDC00000-ABCDEF         1         225455T         CDC, DD           D7591 LED         SLR-342MGTEFP         1         225455T <dc, dd<="" td="">           D7592 LED         SLR-342MGTEFP         1         225455T         <dc, dd<="" td="">           D7593 LED         SLR-342MGTEFP         1         225455T         <dc, dd<="" td="">           D7593 or         LED         SLR-342MGTEFP         1         225455T         <dc, dd<="" td="">           D7593 or         LED         SLR-342MGTEP         1         22545T         <dc, dd<="" td="">           D7593 or         LED         SLR-342MGTEP         1         22545T         <dc, dd<="" td=""> <!--</td--><td>D7580 or</td><td>C-DIODE</td><td>MA2J1110GL</td><td>(1)</td><td>223302R2</td><td></td></dc,></dc,></dc,></dc,></dc,></dc,> | D7580 or | C-DIODE    | MA2J1110GL           | (1) | 223302R2    |                                    |
| D7582 or C-DIODE         ISS355         1         223269R2           D7583 or C-DIODE         MAZH110GL         (1)         22330R2           D7583 c C-DIODE         ISS355         1         22320R2           D7583 or C-DIODE         MAZH110GL         (1)         22330R2           D7590 LED         SDPB3DD0C0000-ABCDEF         1         225473           D7591 LED         SDPB3DD0C0000-ABCDEF         1         225473           D7591 LED         SDPB3DD0C0000-ABCDEF         1         225473           D7591 LED         SDPB3DD0C0000-ABCDEF         1         225455T           D7592 LED         SLR-342MGTEFP         1         225455T <dc, dd="">           D7593 LED         SLR-342MGTEFP         1         225455T         <dc, dd="">           D7593 LED         SLR-342MGTE7P         1         225455T         <dc, dd="">           D7593 or LED         SEL4310G         (1)         225455T         <dc, dd="">           D7593 or LED         SEL4310G-D         (1)         22545T         <dc, dd="">           D7593 or LED         SEL4310G-D         (1)         22549T         <dc, dd="">           D7593 or LED         SEL4310G-D         (1)         22549T         <mp, dt,="" mt,="" na906=""> <td>D7581</td><td>C-DIODE</td><td>1SS355</td><td>1</td><td>223269R2</td><td></td></mp,></dc,></dc,></dc,></dc,></dc,></dc,>                                    | D7581    | C-DIODE    | 1SS355               | 1   | 223269R2    |                                    |
| D7582 or C-DIODE         MA2J1110GL         (1)         223302R2           D7583 C-DIODE         185355         1         22360R2           D7590 LED         MA2J1110GL         (1)         223302R2           D7590 LED         SDPB3DD0C0000-ABCDEF         1         225473           D7590a HOLDER         (LED)LH-5-5         1         27191312           D7591 LED         SDPB3DD0C0000-ABCDEF         1         225473           D7592 LED         SLR-342MGTE7P         1         225455T <dc, dd="">           D7592 LED         SLR-342MGTE7P         1         225455T         <dc, dd="">           D7593 LED         SLR-342MGTE7P         1         225455T         <dc, dd="">           D7593 LED         SLR-342MGTE7P         1         225455T         <dc, dd="">           D7593 CLED         SEL410G         (1)         225455T         <dc, dd="">           D7593 or LED         SEL4310G-D         (1)         22545T         <dc, dd="">           D7593 or LED         SEL4310G-D         (1)         22549T         <dc, dd="">           D7593 or LED         SEL4310G-D         (1)         22549T         <dc, dd="">           D7594 LED         SL1-343URC-TE7         1         22549T         <td< td=""><td>D7581 or</td><td>C-DIODE</td><td>MA2J1110GL</td><td>(1)</td><td>223302R2</td><td></td></td<></dc,></dc,></dc,></dc,></dc,></dc,></dc,></dc,>            | D7581 or | C-DIODE    | MA2J1110GL           | (1) | 223302R2    |                                    |
| D7583         C-DIODE         ISS355         1         223269R2           D7583 or         C-DIODE         MA2J1110GL         (1)         223302R2           D7590         LED         SDPB3DDOC0000-ABCDEF         1         224473           D7590         HOLDER         (LED)LH-5-5         1         27191312           D7591         LED         SDPB3DDOC0000-ABCDEF         1         225437           D7592         LED         SLR-342MGTEP         1         225455T <dc, dd="">           D7592         LED         SLR-342MGTEP         1         225455T         <dc, dd="">           D7593         LED         SLR-342MGTEPP         1         225455T         <dc, dd="">           D7593         LED         SLR-342MGTEPP         1         225455T         <dc, dd="">           D7593 or         LED         SL410G         (1)         225455T         <dc, dd="">           D7593 or         LED         SEL4410G         (1)         22545T         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         22545T         <mp, dt,="" mt,="" n4906="">           D7593 or         LED         SEL4310G-D         (1)         22549T         <mp, dt,="" mt,="" n4906=""></mp,></mp,></dc,></dc,></dc,></dc,></dc,></dc,>   | D7582    | C-DIODE    | 1SS355               | 1   | 223269R2    |                                    |
| D7583 or         C-DIODE         MA2J1110GL         (1)         223302R2           D7590         LED         SDPB3DDC0000-ABCDEF         1         225473           D75904         HOLDER         (LED)LH-S-S         1         27191312           D7591         LED         SDPB3DD000000-ABCDEF         1         225473           D7592         LED         SLR-342MGTE7P         1         22545ST <dc, dd="">           D7593         LED         SLR-342MGTE7P         1         22545ST         <dc, dd="">           D7593         LED         SLR-342MGTE7P         1         22545ST         <dc, dd="">           D7593         LED         SLR-342MGTE7P         1         22545ST         <dc, dd="">           D7593         LED         SLR-342MGTE7P         1         22545T         <dc, dd="">           D7593 or         LED         SEL4410G         (1)         22545T         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         22549T         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         22549T         <dc, dd="">           D7594         LED         SL333URC-TE7         1         22549T         <dmp, dt,="" mt,="" na906=""></dmp,></dc,></dc,></dc,></dc,></dc,></dc,></dc,></dc,>   | D7582 or | C-DIODE    | MA2J1110GL           | (1) | 223302R2    |                                    |
| D7590         LED         SDP83DDC0000-ABCDEF         1         225473           D7590a         HOLDER         (LED)LH-5-5         1         27191312           D7591         LED         SDP83DDC0000-ABCDEF         1         225473           D7592         LED         SLR-342MGTE7P         1         225455T <dc, dd="">           D7592         LED         SLR-342MGTE7P         1         225455T         <dc, dd="">           D7593         LED         SLR-342MGTE7P         1         225455T         <dd, dd="">           D7593         LED         SLR-342MGTE7P         1         225455T         <dd, dd="">           D7593         LED         SLR-342MGTE7P         1         22545T         <dc, dd="">           D7593 or         LED         SEL4410G         (1)         22545T         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         225292DT         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         225292DT         <mp, dt,="" mt,="" na906="">           D7594         LED         SL1-343URC-TE7         1         22549T         <mp, dt,="" mt,="" na906="">           D7594         LED         SL1-343URC-TE7         1         <t< td=""><td>D7583</td><td>C-DIODE</td><td>1SS355</td><td>1</td><td>223269R2</td><td></td></t<></mp,></mp,></dc,></dc,></dc,></dd,></dd,></dc,></dc,>            | D7583    | C-DIODE    | 1SS355               | 1   | 223269R2    |                                    |
| D7590a         HOLDER         (LED)LH-5-5         1         27191312           D7591         LED         SDPB3DDC00000-ABCDEF         1         225473           D7592         LED         SLR-342MGTE7P         1         225455T <dc, dd="">           D7592         LED         SLR-342MGTE7P         1         225455T         <mp, dt,="" mt,="" na906="">           D7593         LED         SLR-342MGTE7P         1         225455T         <dc, dd="">           D7593         LED         SLR-342MGTE7P         1         225455T         <mp, dt,="" mt,="" na906="">           D7593         LED         SEL4410G         (1)         225454T         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         22549T         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         22549T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL4310G-D         (1)         22549T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SL343URC-TE7         1         225449T         <dc, dd="">           D7594         LED         SL1-343URC-TE7         1         225449T         <mp, dt,="" mt,="" na906="">           D9306         ZENER D</mp,></dc,></mp,></mp,></dc,></dc,></mp,></dc,></mp,></dc,>  | D7583 or | C-DIODE    | MA2J1110GL           | (1) | 223302R2    |                                    |
| D7591         LED         SDPB3DDC0000-ABCDEF         1         225473           D7592         LED         SLR-342MGTE7P         1         225455T <dc, dd="">           D7592         LED         SLR-342MGTE7P         1         225455T         <mp, dt,="" mt,="" na906="">           D7593         LED         SLR-342MGTE7P         1         225455T         <mp, dt,="" mt,="" na906="">           D7593         LED         SLR-342MGTE7P         1         225455T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL410G         (1)         22545T         <dc, dd="">           D7593 or         LED         SEL410G-D         (1)         225292DT         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         225449T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL4310G-D         (1)         22549T         <mp, dt,="" mt,="" na906="">           D7594         LED         SL1-343URC-TE7         1         22549T         <mp, dt,="" mt,="" na906="">           D9303         DIODE         DIOXB60H         1         2236337F            D9306         ZENER D         MTZJS18         1         22447202T            D9307         D</mp,></mp,></mp,></dc,></dc,></mp,></mp,></mp,></dc,>   | D7590    | LED        | SDPB3DD0C0000-ABCDEF | 1   | 225473      |                                    |
| D7592         LED         SLR-342MGTE7P         1         225455T         < DC, DD>           D7592         LED         SLR-342MGTE7P         1         225455T <mp, dt,="" mt,="" na906="">           D7593         LED         SLR-342MGTE7P         1         225455T         <dc, dd="">           D7593         LED         SLR-342MGTE7P         1         225455T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL410G         (1)         225454T         <dc, dd="">           D7593 or         LED         SEL4410G         (1)         225454T         <dc, dd="">           D7593 or         LED         SEL4410G         (1)         225454T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL4310G-D         (1)         225454T         <mp, dt,="" mt,="" na906="">           D7594         LED         SL1-343URC-TE7         1         22549T         <dc, dd="">           D7594         LED         SL1-343URC-TE7         1         22549T         <dc, dd="">           D7594         LED         SL1-343URC-TE7         1         22549T         <dc, dd="">           D7594         LED         MTZJ28         1         224472         <dc, dd="">           D9306</dc,></dc,></dc,></dc,></mp,></mp,></dc,></dc,></mp,></dc,></mp,>  | D7590a   | HOLDER     | (LED)LH-5-5          | 1   | 27191312    |                                    |
| D7592         LED         SLR-342MGTE7P         1         225455T <mp, dt,="" mt,="" na906="">           D7593         LED         SLR-342MGTE7P         1         225455T         <dc, dd="">           D7593         LED         SLR-342MGTE7P         1         225455T         <mp, dt,="" mt,="" na906="">           D7593         LED         SEL4110G         (1)         225454T         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         225292DT         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         22549T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL4310G-D         (1)         22549T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL4310G-D         (1)         225449T         <mp, dt,="" mt,="" na906="">           D7594         LED         SL1-343URC-TE7         1         225449T         <mp, dt,="" mt,="" na906="">           D9303         D10DE         D10XB60H         1         2338037F            D9304         ZENER D         MTZJ22B         1         22447220T            D9305         ZENER D         MTZJ24B         1         22447220T            D9310<td>D7591</td><td>LED</td><td>SDPB3DD0C0000-ABCDEF</td><td>1</td><td>225473</td><td></td></mp,></mp,></mp,></mp,></dc,></dc,></mp,></dc,></mp,>                | D7591    | LED        | SDPB3DD0C0000-ABCDEF | 1   | 225473      |                                    |
| D7593         LED         SLR-342MGTE7P         1         225455T <dc, dd="">           D7593         LED         SLR-342MGTE7P         1         225455T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL410G         (1)         225454T         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         225292DT         <dc, dd="">           D7593 or         LED         SEL4410G         (1)         225454T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL4310G-D         (1)         225292DT         <mp, dt,="" mt,="" na906="">           D7594         LED         SEL343URC-TE7         1         225449T         <dc, dd="">           D7594         LED         SL1-343URC-TE7         1         225449T         <mp, dt,="" mt,="" na906="">           D7594         LED         MTZ1238         1         223402T         <mp, dt,="" mt,="" na906="">           D9303         DIODE         D10XB60H         1         22380337F         <mp, dt,="" mt,="" na906="">           D9306         ZENER D         MTZ122B         1         224472202T            D9306         ZENER D         MTZ124B         1         223163T            D9310&lt;</mp,></mp,></mp,></dc,></mp,></mp,></dc,></dc,></mp,></dc,>   | D7592    | LED        | SLR-342MGTE7P        | 1   | 225455T     | <dc, dd=""></dc,>                  |
| D7593         LED         SLR-342MGTE7P         1         22545ST <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL4110G         (1)         225454T         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         225292DT         <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         22549T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SL-343URC-TE7         1         225449T         <dc, dd="">           D7594         LED         MTZJ24B         1         22447202T         <do< td="">           D9306         ZENER D         MTZJ22B         1         22447202T            D9307         DIODE         ISS133         1         223163T            D9310         ZENER D         MTZJ24B         1         22472402T            D9311         ZENER D         MTZJ5.IB</do<></dc,></dc,></dc,></dc,></mp,></dc,></dc,></mp,>   | D7592    | LED        | SLR-342MGTE7P        | 1   | 225455T     | <mp, dt,="" mt,="" na906=""></mp,> |
| D7593 or         LED         SEL4410G         (1)         225454T <dc, dd="">           D7593 or         LED         SEL4310G-D         (1)         225454T         <dc, dd="">           D7593 or         LED         SEL4410G         (1)         225454T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL4310G-D         (1)         22549T         <mp, dt,="" mt,="" na906="">           D7594         LED         SL1-343URC-TE7         1         225449T         <dc, dd="">           D7594         LED         SL1-343URC-TE7         1         225449T         <mp, dt,="" mt,="" na906="">           D9303         DIODE         D10XB60H         1         22380337F            D9306         ZENER D         MTZJ22B         1         22447202T           D9307         DIODE         1SS133         1         223163T           D9308         DIODE         1SS133         1         223163T           D9310         ZENER D         MTZJ24B         1         22447202T           D9311         ZENER D         MTZJ5.IB         1         22447202T           D9312 DIODE         RLIN4003         1         22380260T           D9313 DIODE         GP104003E</mp,></dc,></mp,></mp,></dc,></dc,>   | D7593    | LED        | SLR-342MGTE7P        | 1   | 225455T     | <dc, dd=""></dc,>                  |
| D7593 or         LED         SEL4310G-D         (1)         225292DT <dc, dd="">           D7593 or         LED         SEL4410G         (1)         225454T         <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL4310G-D         (1)         225292DT         <mp, dt,="" mt,="" na906="">           D7594         LED         SLI-343URC-TE7         1         225449T         <dc, dd="">           D7594         LED         SLI-343URC-TE7         1         225449T         <dc, dd="">           D7594         LED         DIOXB60H         1         22380337F           D9303         DIODE         DIOXB60H         1         22380337F           D9306         ZENER D         MTZJ22B         1         224472202T           D9307         DIODE         ISS133         1         223163T           D9308         DIODE         ISS133         1         223163T           D9310         ZENER D         MTZJ24B         1         224472402T           D9311         ZENER D         MTZJ24B         1         224472402T           D9312 DIODE         GP104003E         (1)         22380260T           D9313 DIODE         GP104003E         (1)         22380035T</dc,></dc,></mp,></mp,></dc,>  | D7593    | LED        | SLR-342MGTE7P        | 1   | 225455T     | <mp, dt,="" mt,="" na906=""></mp,> |
| D7593 or         LED         SEL410G         (1)         225454T <mp, dt,="" mt,="" na906="">           D7593 or         LED         SEL4310G-D         (1)         225292DT         <mp, dt,="" mt,="" na906="">           D7594         LED         SL1-343URC-TE7         1         225449T         <dc, dd="">           D7594         LED         SL1-343URC-TE7         1         225449T         <mp, dt,="" mt,="" na906="">           D9303         DIODE         D10XB60H         1         22380337F            D9306         ZENER D         MTZ122B         1         224472202T           D9307         DIODE         ISS133         1         223163T           D9310         ZENER D         MTZ124B         1         224472402T           D9311         ZENER D         MTZ15.1B         1         2244702T           D9312         DIODE         RL1N4003         1         22380260T           D9313         DIODE         GP104003E         (1)         22380035T           D9313 or         DIODE         GP104003E         (1)         22380260T           D9314 or         DIODE         GP104003E         (1)         22380260T           D9315 or         DIODE         GP104003E<td>D7593 or</td><td>LED</td><td>SEL4410G</td><td>(1)</td><td>225454T</td><td><dc, dd=""></dc,></td></mp,></dc,></mp,></mp,>   | D7593 or | LED        | SEL4410G             | (1) | 225454T     | <dc, dd=""></dc,>                  |
| D7593 or         LED         SEL4310G-D         (1)         225292DT <mp, dt,="" mt,="" na906="">           D7594         LED         SLI-343URC-TE7         1         225449T         <dc, dd="">           D7594         LED         SLI-343URC-TE7         1         225449T         <mp, dt,="" mt,="" na906="">           D9303         DIODE         D10XB60H         1         22380337F            D9306         ZENER D         MTZJ22B         1         224472202T            D9307         DIODE         1SS133         1         223163T            D9310         ZENER D         MTZJ24B         1         224472402T            D9311         ZENER D         MTZJ5.1B         1         224470512T            D9312         DIODE         RLIN4003         1         22380260T            D9312 or         DIODE         GP104003E         (1)         22380260T            D9313 or         DIODE         RLIN4003         1         22380260T            D9314 or         DIODE         GP104003E         (1)         22380260T            D9315 or         DIODE         RLIN4003         1</mp,></dc,></mp,>  | D7593 or | LED        | SEL4310G-D           | (1) | 225292DT    | <dc, dd=""></dc,>                  |
| D7594         LED         SLI-343URC-TE7         1         225449T <dc, dd="">           D7594         LED         SLI-343URC-TE7         1         225449T         <mp, dt,="" mt,="" na906="">           D9303         DIODE         D10XB60H         1         22380337F           D9306         ZENER D         MTZJ22B         1         22447202T           D9307         DIODE         1SS133         1         223163T           D9308         DIODE         1SS133         1         223163T           D9310         ZENER D         MTZJ5.1B         1         224472402T           D9311         ZENER D         MTZJ5.1B         1         224470512T           D9312         DIODE         RLIN4003         1         22380260T           D9313 or         DIODE         GP104003E         (1)         22380260T           D9313 or         DIODE         GP104003E         (1)         22380260T           D9314 or         DIODE         GP104003E         (1)         2238025T           D9314 or         DIODE         GP104003E         (1)         22380260T           D9315 or         DIODE         GP104003E         (1)         22380260T           D9315 or&lt;</mp,></dc,>   | D7593 or | LED        | SEL4410G             | (1) | 225454T     | <mp, dt,="" mt,="" na906=""></mp,> |
| D7594         LED         SLI-343URC-TE7         1         225449T <mp, dt,="" mt,="" na906="">           D9303         DIODE         D10XB60H         1         22380337F           D9306         ZENER D         MTZJ22B         1         224472202T           D9307         DIODE         ISS133         1         223163T           D9308         DIODE         ISS133         1         223163T           D9310         ZENER D         MTZJ24B         1         224472402T           D9311         ZENER D         MTZJ5.1B         1         224470512T           D9312         DIODE         RLIN4003         1         22380260T           D9313 Or         DIODE         GP104003E         (1)         22380260T           D9313 Or         DIODE         GP104003E         (1)         22380260T           D9313 Or         DIODE         GP104003E         (1)         22380260T           D9314 Or         DIODE         GP104003E         (1)         22380250T           D9315 DIODE         RLIN4003         1         22380260T           D9315 OR         DIODE         GP104003E         (1)         22380250T           D9316 DIODE         GP104003E         &lt;</mp,>  | D7593 or | LED        | SEL4310G-D           | (1) | 225292DT    | <mp, dt,="" mt,="" na906=""></mp,> |
| D9303         DIODE         D10XB60H         1         22380337F           D9306         ZENER D         MTZJ22B         1         224472202T           D9307         DIODE         1SS133         1         223163T           D9308         DIODE         1SS133         1         223163T           D9310         ZENER D         MTZJ24B         1         224472402T           D9311         ZENER D         MTZJ5.1B         1         224470512T           D9312         DIODE         RLIN4003         1         22380260T           D9312 or         DIODE         GP104003E         (1)         22380260T           D9313         DIODE         RLIN4003         1         22380260T           D9313 or         DIODE         GP104003E         (1)         2238025T           D9314 DIODE         RLIN4003         1         2238025T           D9315 DIODE         GP104003E         (1)         2238025T           D9315 or         DIODE         GP104003E         (1)         2238025T           D9316 DIODE         RLIN4003         1         2238025T           D9316 DIODE         GP104003E         (1)         2238025T   | D7594    | LED        | SLI-343URC-TE7       | 1   | 225449T     | <dc, dd=""></dc,>                  |
| D9306         ZENER D         MTZJ22B         1         224472202T           D9307         DIODE         ISS133         1         223163T           D9308         DIODE         ISS133         1         223163T           D9310         ZENER D         MTZJ24B         1         224472402T           D9311         ZENER D         MTZJ5.1B         1         224470512T           D9312         DIODE         RL1N4003         1         22380260T           D9312 or         DIODE         GP104003E         (1)         22380260T           D9313 DIODE         RL1N4003         1         22380260T           D9314 DIODE         GP104003E         (1)         22380260T           D9314 Or         DIODE         GP104003E         (1)         22380260T           D9315 DIODE         RL1N4003         1         22380260T           D9315 or         DIODE         GP104003E         (1)         2238025T           D9316 DIODE         RL1N4003         1         22380260T           D9316 DIODE         RL1N4003         1         22380260T           D9316 DIODE         GP104003E         (1)         22380260T           D9316 DIODE         GP104003E  | D7594    | LED        | SLI-343URC-TE7       | 1   | 225449T     | <mp, dt,="" mt,="" na906=""></mp,> |
| D9307         DIODE         1SS133         1         223163T           D9308         DIODE         1SS133         1         223163T           D9310         ZENER D         MTZJ24B         1         224472402T           D9311         ZENER D         MTZJ5.1B         1         224470512T           D9312         DIODE         RL1N4003         1         22380260T           D9312 or         DIODE         GP104003E         (1)         22380260T           D9313 or         DIODE         GP104003E         (1)         22380260T           D9314 DIODE         RL1N4003         1         22380260T           D9314 or         DIODE         GP104003E         (1)         2238035T           D9315 DIODE         RL1N4003         1         22380260T           D9315 or         DIODE         GP104003E         (1)         22380260T           D9315 or         DIODE         GP104003E         (1)         22380260T           D9316 DIODE         RL1N4003         1         22380260T           D9316 Or         DIODE         GP104003E         (1)         22380260T           D9316 or         DIODE         GP104003E         (1)         22380260T </td <td>D9303</td> <td>DIODE</td> <td>D10XB60H</td> <td>1</td> <td>22380337F</td> <td></td>   | D9303    | DIODE      | D10XB60H             | 1   | 22380337F   |                                    |
| D9308         DIODE         ISS133         1         223163T           D9310         ZENER D         MTZJ24B         1         224472402T           D9311         ZENER D         MTZJ5.1B         1         224470512T           D9312         DIODE         RL1N4003         1         22380260T           D9312 or         DIODE         GP104003E         (1)         22380260T           D9313         DIODE         GP104003E         (1)         22380260T           D9314 or         DIODE         GP104003E         (1)         22380260T           D9314 or         DIODE         GP104003E         (1)         22380260T           D9315 DIODE         RL1N4003         1         22380260T           D9315 or         DIODE         GP104003E         (1)         22380260T           D9316 DIODE         RL1N4003         1         22380260T           D9316 or         DIODE         GP104003E         (1)         22380260T           D9316 or         DIODE         GP104003E         (1)         22380260T  | D9306    | ZENER D    | MTZJ22B              | 1   | 224472202T  |                                    |
| D9310         ZENER D         MTZJ24B         1         224472402T           D9311         ZENER D         MTZJ5.1B         1         224470512T           D9312         DIODE         RL1N4003         1         22380260T           D9312 or         DIODE         GP104003E         (1)         22380260T           D9313         DIODE         RL1N4003         1         22380260T           D9314 or         DIODE         GP104003E         (1)         22380260T           D9314 or         DIODE         GP104003E         (1)         22380035T           D9315         DIODE         RL1N4003         1         22380260T           D9315 or         DIODE         GP104003E         (1)         22380035T           D9316         DIODE         RL1N4003         1         22380260T           D9316 or         DIODE         GP104003E         (1)         22380260T           D9316 or         DIODE         GP104003E         (1)         22380260T  | D9307    | DIODE      | 1SS133               | 1   | 223163T     |                                    |
| D9311         ZENER D         MTZJ5.1B         1         224470512T           D9312         DIODE         RL1N4003         1         22380260T           D9312 or         DIODE         GP104003E         (1)         22380035T           D9313         DIODE         RL1N4003         1         22380260T           D9314 or         DIODE         GP104003E         (1)         22380260T           D9314 or         DIODE         GP104003E         (1)         22380035T           D9315         DIODE         RL1N4003         1         22380260T           D9315 or         DIODE         GP104003E         (1)         22380035T           D9316         DIODE         RL1N4003         1         22380260T           D9316 or         DIODE         GP104003E         (1)         22380260T           D9316 or         DIODE         GP104003E         (1)         22380260T   | D9308    | DIODE      | 1SS133               | 1   | 223163T     |                                    |
| D9312         DIODE         RL1N4003         1         22380260T           D9312 or         DIODE         GP104003E         (1)         22380035T           D9313         DIODE         RL1N4003         1         22380260T           D9313 or         DIODE         GP104003E         (1)         22380035T           D9314         DIODE         RL1N4003         1         22380260T           D9314 or         DIODE         GP104003E         (1)         22380035T           D9315         DIODE         RL1N4003         1         22380260T           D9315 or         DIODE         GP104003E         (1)         22380035T           D9316         DIODE         RL1N4003         1         22380260T           D9316 or         DIODE         GP104003E         (1)         22380260T           D9316 or         DIODE         GP104003E         (1)         22380035T  | D9310    | ZENER D    | MTZJ24B              | 1   | 224472402T  |                                    |
| D9312 or         DIODE         GP104003E         (1)         22380035T           D9313         DIODE         RL1N4003         1         22380260T           D9313 or         DIODE         GP104003E         (1)         22380035T           D9314         DIODE         RL1N4003         1         22380260T           D9314 or         DIODE         GP104003E         (1)         22380035T           D9315         DIODE         RL1N4003         1         22380260T           D9315 or         DIODE         GP104003E         (1)         22380035T           D9316         DIODE         RL1N4003         1         22380260T           D9316 or         DIODE         GP104003E         (1)         22380035T  | D9311    | ZENER D    | MTZJ5.1B             | 1   | 224470512T  |                                    |
| D9313         DIODE         RL1N4003         1         22380260T           D9313 or         DIODE         GP104003E         (1)         22380035T           D9314         DIODE         RL1N4003         1         22380260T           D9314 or         DIODE         GP104003E         (1)         22380035T           D9315         DIODE         RL1N4003         1         22380260T           D9315 or         DIODE         GP104003E         (1)         22380035T           D9316         DIODE         RL1N4003         1         22380260T           D9316 or         DIODE         GP104003E         (1)         22380035T   | D9312    | DIODE      | RL1N4003             | 1   | 22380260T   |                                    |
| D9313 or         DIODE         GP104003E         (1)         22380035T           D9314         DIODE         RL1N4003         1         22380260T           D9314 or         DIODE         GP104003E         (1)         22380035T           D9315         DIODE         RL1N4003         1         22380260T           D9315 or         DIODE         GP104003E         (1)         22380035T           D9316         DIODE         RL1N4003         1         22380260T           D9316 or         DIODE         GP104003E         (1)         22380035T  | D9312 or | DIODE      | GP104003E            | (1) | 22380035T   |                                    |
| D9314         DIODE         RL1N4003         1         22380260T           D9314 or         DIODE         GP104003E         (1)         22380035T           D9315         DIODE         RL1N4003         1         22380260T           D9315 or         DIODE         GP104003E         (1)         22380035T           D9316         DIODE         RL1N4003         1         22380260T           D9316 or         DIODE         GP104003E         (1)         22380035T   | D9313    | DIODE      | RL1N4003             | 1   | 22380260T   |                                    |
| D9314 or         DIODE         GP104003E         (1)         22380035T           D9315         DIODE         RL1N4003         1         22380260T           D9315 or         DIODE         GP104003E         (1)         22380035T           D9316         DIODE         RL1N4003         1         22380260T           D9316 or         DIODE         GP104003E         (1)         22380035T  | D9313 or | DIODE      | GP104003E            | (1) | 22380035T   |                                    |
| D9315         DIODE         RL1N4003         1         22380260T           D9315 or         DIODE         GP104003E         (1)         22380035T           D9316         DIODE         RL1N4003         1         22380260T           D9316 or         DIODE         GP104003E         (1)         22380035T   | D9314    | DIODE      | RL1N4003             | 1   | 22380260T   |                                    |
| D9315 or         DIODE         GP104003E         (1)         22380035T           D9316         DIODE         RL1N4003         1         22380260T           D9316 or         DIODE         GP104003E         (1)         22380035T  |          | DIODE      | GP104003E            | (1) | 22380035T   |                                    |
| D9316         DIODE         RL1N4003         1         22380260T           D9316 or         DIODE         GP104003E         (1)         22380035T   | D9315    | DIODE      | RL1N4003             | 1   | 22380260T   |                                    |
| D9316 or DIODE GP104003E (1) 22380035T  |          |            | GP104003E            | (1) | 22380035T   |                                    |
|   | D9316    | DIODE      | RL1N4003             | 1   | 22380260T   |                                    |
| L7520 CHOKE COIL NCH-1561 022K 1 233526K022T  | D9316 or | DIODE      | GP104003E            | (1) | 22380035T   |                                    |
|   | L7520    | CHOKE COIL | NCH-1561 022K        | 1   | 233526K022T |                                    |

| 1.7520         | CHOKE COIL               | NCH 1541 022V                  | 1 | 222526V022T                |
|----------------|--------------------------|--------------------------------|---|----------------------------|
| L7530<br>L7580 | CHOKE COIL<br>CHOKE COIL | NCH-1561 022K<br>NCH-1561 022K | 1 | 233526K022T<br>233526K022T |
| L7580<br>L7581 | CHOKE COIL  CHOKE COIL   | NCH-1561 022K<br>NCH-1561 022K | 1 | 233526K022T<br>233526K022T |
| L7581<br>L7582 | CHOKE COIL  CHOKE COIL   | NCH-1561 022K<br>NCH-1561 022K |   |                            |
| C7501          | C-CERA C                 |                                | 1 | 233526K022T                |
|                |                          | CK725B1H-223K1                 |   | 332102235R1                |
| C7502          | C-CERA C                 | CK725F1E-104Z1                 | 1 | 332161040R1                |
| C7503          | C-CERA C                 | CK725F1E-104Z1                 | 1 | 332161040R1                |
| C7504          | C-CERA C                 | CK725B1H-473K1                 | 1 | 332104735R1                |
| C7505          | C-CERA C                 | CK725B1H-473K1                 | 1 | 332104735R1                |
| C7506          | ELECT C                  | CE04W50V-33M                   | 1 | 355783309T                 |
| C7511          | C-CERA C                 | CK725F1E-104Z1                 | 1 | 332161040R1                |
| C7512          | C-CERA C                 | CC725CH1H-180J1                | 1 | 342101804R1                |
| C7513          | C-CERA C                 | CK725F1E-104Z1                 | 1 | 332161040R1                |
| C7514          | C-CERA C                 | CK725F1E-104Z1                 | 1 | 332161040R1                |
| C7518          | C-CERA C                 | CK725F1E-104Z1                 | 1 | 332161040R1                |
| C7519          | C-CERA C                 | CK725F1E-104Z1                 | 1 | 332161040R1                |
| C7520          | C-CERA C                 | CK725B1H-223K1                 | 1 | 332102235R1                |
| C7521          | UTSP C                   | CE04W10V-100M(UTSP)            | 1 | 397531017T                 |
| C7522          | C-CERA C                 | CC725CH1H-221J1                | 1 | 342102214R1                |
| C7523          | C-CERA C                 | CC725CH1H-221J1                | 1 | 342102214R1                |
| C7524          | C-CERA C                 | CK725B1H-102K1                 | 1 | 332101025R1                |
| C7530          | C-CERA C                 | CK725B1H-102K1                 | 1 | 332101025R1                |
| C7531          | C-CERA C                 | CK725B1H-102K1                 | 1 | 332101025R1                |
| C7533          | ELECT C                  | CE04W35V-47M                   | 1 | 355764709T                 |
| C7534          | ELECT C                  | CE04W35V-47M                   | 1 | 355764709T                 |
| C7535          | ELECT C                  | CE04W35V-10M(S)                | 1 | 353761009T                 |
| C7536          | C-CERA C                 | CC725CH1H-101J1                | 1 | 342101014R1                |
| C7537          | C-CERA C                 | CC725CH1H-330J1                | 1 | 342103304R1                |
| C7538          | ELECT C                  | CE04W35V-10M(S)                | 1 | 353761009T                 |
| C7539          | ELECT C                  | CE04W35V-10M(S)                | 1 | 353761009T                 |
| C7540          | ELECT C                  | CE04W35V-10M(S)                | 1 | 353761009T                 |
| C7543          | C-CERA C                 | CK725B1H-102K1                 | 1 | 332101025R1                |
| C7550          | C-CERA C                 | CK725B1H-102K1                 | 1 | 332101025R1                |
| C7560          | ELECT C                  | CE04W6.3V-220M                 | 1 | 355722219T                 |
| C7561          | C-CERA C                 | CK725B1H-102K1                 | 1 | 332101025R1                |
| C7562          | C-CERA C                 | CK725B1H-102K1                 | 1 | 332101025R1                |
| C7580          | C-CERA C                 | CK725B1H-102K1                 | 1 | 332101025R1                |
| C7581          | C-CERA C                 | CK725B1H-102K1                 | 1 | 332101025R1                |
| C7582          | C-CERA C                 | CK725B1H-102K1                 | 1 | 332101025R1                |
| C7583          | C-CERA C                 | CK725B1H-102K1                 | 1 | 332101025R1                |
| C7590          | C-CERA C                 | CK725B1H-103K1                 | 1 | 332101035R1                |
| C7591          | C-CERA C                 | CK725B1H-103K1                 | 1 | 332101035R1                |
| C7900          | C-CERA C                 | CK725F1E-104Z1                 | 1 | 332161040R1                |
| C9302          | VR C                     | CE04W16V-10000M(VR)            | 1 | 394641037S                 |
| C9304          | VR C                     | CE04W63V-470M(VR)              | 1 | 394674717S                 |
| C9305          | VR C                     | CE04W63V-47M(VR)               | 1 | 394674707T                 |
| C9306          | TF C                     | ECQ-B50V-223J                  | 1 | 374722234T                 |
| C9307          | TF C                     | ECQ-V50V-334J                  | 1 | 374723344T                 |
|                |                          |                                |   |                            |

| C9308 | UTSP C     | CE04W50V-4.7M(UTSP)            | 1 | 397580477T   |  |
|-------|------------|--------------------------------|---|--------------|--|
| R7500 | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1  |  |
| R7501 | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1  |  |
| R7502 | C-CARBON R | RN72K1J-273JE                  | 1 | 435032734R1  |  |
| R7503 | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1  |  |
| R7504 | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1  |  |
| R7505 | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1  |  |
| R7506 | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1  |  |
| R7507 | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1  |  |
| R7508 | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1  |  |
| R7509 | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1  |  |
| R7510 | C-CARBON R | RN72K1J-222JE                  | 1 | 435032224R1  |  |
| R7520 | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1  |  |
| R7521 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1  |  |
| R7522 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1  |  |
| R7523 | C-CARBON R | RN72K1J-750JE                  | 1 | 435037504R1  |  |
| R7524 | C-CARBON R | RN72K1J-750JE                  | 1 | 435037504R1  |  |
| R7525 | C-CARBON R | RN72K1J-750JE                  | 1 | 435037504R1  |  |
| R7526 | C-CARBON R | RN72K1J-750JE<br>RN72K1J-223JE | 1 | 435032234R1  |  |
| R7527 | C-CARBON R | RN72K1J-223JE<br>RN72K1J-223JE | 1 | 435032234R1  |  |
| R7528 | C-CARBON R | RN72K1J-223JE<br>RN72K1J-224JE | 1 | 435032244R1  |  |
| R7529 | C-CARBON R | RN72K1J-224JE                  | 1 | 435032244R1  |  |
| R7530 | C-CARBON R | RN72K1J-224JE<br>RN72K1J-472JE | 1 | 435034724R1  |  |
| R7531 | C-CARBON R | RN72K1J-472JE<br>RN72K1J-101JE | 1 | 435031014R1  |  |
| R7532 | C-CARBON R | RN72K1J-101JE<br>RN72K1J-331JE | 1 | 435033014R1  |  |
| R7533 | C-CARBON R | RN72K1J-351JE<br>RN72K1J-182JE | 1 | 4350313824R1 |  |
| R7534 | C-CARBON R | RN72K1J-182JE<br>RN72K1J-104JE | 1 | 435031044R1  |  |
| R7535 | C-CARBON R | RN72K1J-104JE<br>RN72K1J-102JE | 1 | 435031024R1  |  |
| R7536 | C-CARBON R | RN72K1J-102JE<br>RN72K1J-333JE | 1 | 435033034R1  |  |
|       |            |                                |   |              |  |
| R7537 | C-CARBON R | RN72K1J-333JE                  | 1 | 435033334R1  |  |
| R7538 | C-CARBON R | RN72K1J-221JE                  |   | 435032214R1  |  |
| R7539 | C-CARBON R | RN72K1J-221JE                  | 1 | 435032214R1  |  |
| R7540 | C-CARBON R | RN72K1J-473JE                  |   | 435034734R1  |  |
| R7560 | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1  |  |
| R7561 | C-CARBON R | RN72K1J-101JE                  | 1 | 435031014R1  |  |
| R7580 | METAL O R  | RS1WBJ-33                      | 1 | 443623304T   |  |
| R7581 | METAL O R  | RS1WBJ-33                      | 1 | 443623304T   |  |
| R7590 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1  |  |
| R7591 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1  |  |
| R7592 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1  |  |
| R7593 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1  |  |
| R7594 | C-CARBON R | RN72K1J-121JE                  | 1 | 435031214R1  |  |
| R7595 | C-CARBON R | RN72K1J-121JE                  | 1 | 435031214R1  |  |
| R7596 | C-CARBON R | RN72K1J-181JE                  | 1 | 435031814R1  |  |
| R7597 | C-CARBON R | RN72K1J-181JE                  | 1 | 435031814R1  |  |
| R7598 | C-CARBON R | RN72K1J-151JE                  | 1 | 435031514R1  |  |
| R7611 | C-CARBON R | RN72K1J-271JE                  | 1 | 435032714R1  |  |
| R7612 | C-CARBON R | RN72K1J-331JE                  | 1 | 435033314R1  |  |
|       |            |                                |   |              |  |

| D7610          | G GARRON R  | DVZOVIL AZIJE                  |   | 425024714P1                |          |
|----------------|-------------|--------------------------------|---|----------------------------|----------|
| R7613          | C-CARBON R  | RN72K1J-471JE                  | 1 | 435034714R1                |          |
| R7614          | C-CARBON R  | RN72K1J-561JE                  | 1 | 435035614R1                |          |
| R7615          | C-CARBON R  | RN72K1J-821JE                  | 1 | 435038214R1                |          |
| R7616          | C-CARBON R  | RN72K1J-122JE                  | 1 | 435031224R1                |          |
| R7617          | C-CARBON R  | RN72K1J-222JE                  | 1 | 435032224R1                |          |
| R7618          | C-CARBON R  | RN72K1J-392JE                  | 1 | 435033924R1                |          |
| R7621          | C-CARBON R  | RN72K1J-271JE                  | 1 | 435032714R1                |          |
| R7622          | C-CARBON R  | RN72K1J-331JE                  | 1 | 435033314R1                |          |
| R7623          | C-CARBON R  | RN72K1J-471JE                  | 1 | 435034714R1                |          |
| R7624          | C-CARBON R  | RN72K1J-561JE                  | 1 | 435035614R1                |          |
| R7625          | C-CARBON R  | RN72K1J-821JE                  | 1 | 435038214R1                |          |
| R7626          | C-CARBON R  | RN72K1J-122JE                  | 1 | 435031224R1                |          |
| R7627          | C-CARBON R  | RN72K1J-222JE                  | 1 | 435032224R1                |          |
| R7628          | C-CARBON R  | RN72K1J-392JE                  | 1 | 435033924R1                |          |
| R7629          | C-CARBON R  | RN72K1J-123JE                  | 1 | 435031234R1                |          |
| R7631          | C-CARBON R  | RN72K1J-271JE                  | 1 | 435032714R1                |          |
| R7632          | C-CARBON R  | RN72K1J-331JE                  | 1 | 435033314R1                |          |
| R7633          | C-CARBON R  | RN72K1J-471JE                  | 1 | 435034714R1                |          |
| R7634          | C-CARBON R  | RN72K1J-561JE                  | 1 | 435035614R1                |          |
| R7635          | C-CARBON R  | RN72K1J-821JE                  | 1 | 435038214R1                |          |
| R7636          | C-CARBON R  | RN72K1J-122JE                  | 1 | 435031224R1                |          |
| R7637          | C-CARBON R  | RN72K1J-222JE                  | 1 | 435032224R1                |          |
| R7638          | C-CARBON R  | RN72K1J-392JE                  | 1 | 435033924R1                |          |
| R7639          | C-CARBON R  | RN72K1J-123JE                  | 1 | 435031234R1                |          |
| R7641          | C-CARBON R  | RN72K1J-271JE                  | 1 | 435032714R1                |          |
| R7642          | C-CARBON R  | RN72K1J-331JE                  | 1 | 435033314R1                |          |
| R7643          | C-CARBON R  | RN72K1J-471JE                  | 1 | 435034714R1                |          |
| R7644          | C-CARBON R  | RN72K1J-561JE                  | 1 | 435035614R1                |          |
| R7645          | C-CARBON R  | RN72K1J-821JE                  | 1 | 435038214R1                |          |
| R7646          | C-CARBON R  | RN72K1J-122JE                  | 1 | 435031224R1                |          |
| R7647          | C-CARBON R  | RN72K1J-1223E                  | 1 | 435032224R1                |          |
| R7648          | C-CARBON R  | RN72K1J-392JE                  | 1 | 435033924R1                |          |
| R7649          | C-CARBON R  | RN72K1J-123JE                  | 1 | 435031234R1                |          |
| R7802          | C-CARBON R  | RN72K1J-103JE                  | 1 | 435031234R1<br>435031034R1 |          |
| R7939          | C-CARBON R  | RN72K1J-105JE<br>RN72K1J-104JE | 1 | 435031034R1<br>435031044R1 |          |
| R7954          | C-CARBON R  | RN72K1J-104JE<br>RN72K1J-104JE | 1 | 435031044R1<br>435031044R1 |          |
| R9304          | NF CARBON R | R25J-10                        | 1 | 415471004T                 |          |
| R9304<br>R9305 | CARBON R    | R16J-5.6K                      | 1 | 417345624T                 |          |
|                |             |                                |   |                            |          |
| R9307          | CARBON R    | R16J-33K                       | 1 | 417343334T                 |          |
| R9308          | METAL R     | RNU1/2WCJ-1                    | 1 | 453530104T                 |          |
| R9309          | CARBON R    | R16J-10K                       | 1 | 417341034T                 |          |
| R9310          | METAL O R   | RS1WBJ-22                      | 1 | 443622204T                 |          |
| E7580          | TRM         | NTM-1P233(M1969)               | 1 | 25060302                   |          |
| F9301A         | FUSE HOL    | NSCT-1P2031                    | 1 | 25052133T                  |          |
| F9301B         | FUSE HOL    | NSCT-1P2031                    | 1 | 25052133T                  | <u>!</u> |
| JL4103B        | SOCKET      | NSCT-5P97                      | 1 | 25050269                   |          |
| JL7560A        | WIRE HOL    | NSCT-3P874                     | 1 | 25051087                   |          |
| JL7560B        | WIRE HOL    | NSCT-3P874                     | 1 | 25051087                   |          |
|                |             |                                |   |                            |          |

| JL7590A           | WIRE HOL           | NSCT-9P880                   | 1   | 25051093               |                                    |
|-------------------|--------------------|------------------------------|-----|------------------------|------------------------------------|
| JL7590B           | WIRE HOL           | NSCT-9P880                   | 1   | 25051093               |                                    |
| IL7591A           | WIRE HOL           | NSCT-6P877                   | 1   | 25051090               |                                    |
| L7591B            | WIRE HOL           | NSCT-6P877                   | 1   | 25051090               | ·········                          |
| L9303A            | WIRE HOL           | NSCT-4P875                   | 1   | 25051088               |                                    |
| L9303B            | WIRE TRAP          | NPLG-4P587                   | 1   | 25055625               |                                    |
| L9501B            | SOCKET             | NSCT-6P98                    | 1   | 25050270               |                                    |
| 204B              | PLUG               | NPLG-5P352                   | 1   | 25055369               |                                    |
| 7501B             | SOCKET             | NSCT-40P2170                 | 1   | 25052273               |                                    |
| 7522              | PIN JACK           | NPJ-7PDB603                  | 1   | 25045823               |                                    |
| 7530              | ST JACK            | MSJ-035-05C B AG GR type     | 1   | 25045880               |                                    |
| 7530 or           | JACK               | LGT1516-0100                 | (1) | 25045487               |                                    |
| 7550 01           | PLUG               | XM7A-0441                    | 1   | 25056605               |                                    |
| 7580              | ST JACK            | MSJ-064-05A GR               | 1   | 25045782               |                                    |
| 7999              | WS CLAMP           | CB-71683(L=50)               | 1   | 260261                 |                                    |
| 9008B             | PLUG               | NPLG-2P631                   | 1   | 25055675               | <mp, dt,="" mt,="" na906=""></mp,> |
| 9301A             | PLUG               | NPLG-6P120                   | 1   | 25055136               | (MI, MI, DI, NA900)                |
| 37590             | R ENCODE           | EC12E2425WITH WASHER         | 1   | 25065655W              |                                    |
| 7611              | PUSH SW            | NPS-111-S681                 | 1   | 25035718T              |                                    |
| 7611 or           | PUSH SW            | NPS-111-S677                 | (1) | 25035718T<br>25035714T |                                    |
| 7612              | PUSH SW            | NPS-111-S681                 | 1   | 25035714T<br>25035718T |                                    |
| 7612 or           | PUSH SW            | NPS-111-S677                 | (1) | 25035714T<br>25035714T |                                    |
| 7613              | PUSH SW            | NPS-111-S681                 | 1   | 250357141<br>25035718T |                                    |
| 7613 or           | PUSH SW<br>PUSH SW | NPS-111-S001<br>NPS-111-S677 |     | 250357181<br>25035714T |                                    |
| 57613 or<br>57614 | PUSH SW            | NPS-111-S681                 | (1) | 250357141<br>25035718T |                                    |
|                   |                    |                              |     |                        |                                    |
| 7614 or<br>7615   | PUSH SW<br>PUSH SW | NPS-111-S677                 | (1) | 25035714T<br>25035718T |                                    |
|                   |                    | NPS-111-S681                 | 1   |                        |                                    |
| 7615 or<br>7616   | PUSH SW<br>PUSH SW | NPS-111-S677<br>NPS-111-S681 | (1) | 25035714T<br>25035718T |                                    |
|                   |                    |                              |     |                        |                                    |
| 7616 or           | PUSH SW            | NPS-111-S677                 | (1) | 25035714T              |                                    |
| 7617              | PUSH SW            | NPS-111-S681                 | 1   | 25035718T              | <mp, dt,="" mt,="" na906=""></mp,> |
| 7617 or           | PUSH SW            | NPS-111-S677                 | (1) | 25035714T              | <mp, dt,="" mt,="" na906=""></mp,> |
| 57618             | PUSH SW            | NPS-111-S681                 | 1   | 25035718T              |                                    |
| 7618 or           | PUSH SW            | NPS-111-S677                 | (1) | 25035714T              |                                    |
| 7619              | PUSH SW            | NPS-111-S681                 | 1   | 25035718T              |                                    |
| 7619 or           | PUSH SW            | NPS-111-S677                 | (1) | 25035714T              |                                    |
| 7621              | PUSH SW            | NPS-111-S681                 | 1   | 25035718T              |                                    |
| 7621 or           | PUSH SW            | NPS-111-S677                 | (1) | 25035714T              |                                    |
| 37622             | PUSH SW            | NPS-111-S681                 | 1   | 25035718T              |                                    |
| 7622 or           | PUSH SW            | NPS-111-S677                 | (1) | 25035714T              |                                    |
| 7623              | PUSH SW            | NPS-111-S681                 | 1   | 25035718T              |                                    |
| 7623 or           | PUSH SW            | NPS-111-S677                 | (1) | 25035714T              |                                    |
| 57624             | PUSH SW            | NPS-111-S681                 | 1   | 25035718T              |                                    |
| 57624 or          | PUSH SW            | NPS-111-S677                 | (1) | 25035714T              |                                    |
| 7625              | PUSH SW            | NPS-111-S681                 | 1   | 25035718T              |                                    |
| 7625 or           | PUSH SW            | NPS-111-S677                 | (1) | 25035714T              |                                    |
| 7626              | PUSH SW            | NPS-111-S681                 | 1   | 25035718T              |                                    |
| 7626 or           | PUSH SW            | NPS-111-S677                 | (1) | 25035714T              |                                    |

| S7627    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
|----------|---------|--------------|-----|-----------|
| S7627 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7628    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7628 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7629    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7629 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7630    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7630 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7631    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7631 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7632    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7632 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7633    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7633 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7634    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7634 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7635    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7635 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7636    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7636 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7637    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7637 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7638    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7638 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7639    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7639 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7640    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7640 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7641    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7641 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7642    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7642 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7643    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7643 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7644    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7644 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7645    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7645 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7646    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7646 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7647    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7647 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7648    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7648 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7649    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7649 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
| S7650    | PUSH SW | NPS-111-S681 | 1   | 25035718T |
| S7650 or | PUSH SW | NPS-111-S677 | (1) | 25035714T |
|          |         |              |     |           |

| S9000 | P SW | NPS-111-L590P 1 | l | 25035636 | ! <mp dt="" mt="" na906=""></mp> |
|-------|------|-----------------|---|----------|----------------------------------|

## U42 HDMI PC BOARD (NAHDM-9114-1A)

| REF. NO. | PART NAME        | DESCRIPTION             | Q'TY | PART NO. (SN)   | REMARKS |
|----------|------------------|-------------------------|------|-----------------|---------|
| U8001    | IC               | VX-50                   | 1    | 22242392R3      |         |
| U8027    | IC               | HY5DU561622ETP-4-C      | 1    | 22242450R3      |         |
| U8027 or | IC               | HY5DU561622FTP-4-C      | (1)  | 22242577R3      |         |
| U8028    | IC               | HY5DU561622ETP-4-C      | 1    | 22242450R3      |         |
| U8028 or | IC               | HY5DU561622FTP-4-C      | (1)  | 22242577R3      |         |
| U8029    | IC               | HY5DU561622ETP-4-C      | 1    | 22242450R3      |         |
| U8029 or | IC               | HY5DU561622FTP-4-C      | (1)  | 22242577R3      |         |
| U8030    | IC               | HY5DU561622ETP-4-C      | 1    | 22242450R3      |         |
| U8030 or | IC               | HY5DU561622FTP-4-C      | (1)  | 22242577R3      |         |
| U8031    | IC(VIDEO MEMORY) | S29GL128N10TFI020(0290) | 1    | 222W0071R30290A |         |
| U8031 or | IC(VIDEO MEMORY) | S29GL128P90TFIR20(0290) | (1)  | 222W0090R30290A |         |
| U8067    | IC               | LP2996MX                | 1    | 22242438R2      |         |
| Q8101    | IC               | AD8196                  | 1    |                 | NRP     |
| Q8102    | TR               | 2SK3019                 | 1    | 2216520R2       |         |
| Q8103    | TR               | 2SK3019                 | 1    | 2216520R2       |         |
| Q8104    | IC               | SN74CB3T3306DCT         | 1    | 22242454R2      |         |
| Q8105    | IC               | S-24CS02AFT-V-G         | 1    | 22242360R2      |         |
| Q8105 or | IC               | BR24L02FV-W             | (1)  | 22242069R2      |         |
| Q8108    | TR               | DTA144EE                | 1    | 2216380R2       |         |
| Q8109    | TR               | DTC144EE                | 1    | 2216390R2       |         |
| Q8124    | IC               | SN74CB3T3306DCT         | 1    | 22242454R2      |         |
| Q8125    | IC               | S-24CS02AFT-V-G         | 1    | 22242360R2      |         |
| Q8125 or | IC               | BR24L02FV-W             | (1)  | 22242069R2      |         |
| Q8128    | TR               | DTA144EE                | 1    | 2216380R2       |         |
| Q8129    | TR               | DTC144EE                | 1    | 2216390R2       |         |
| Q8151    | IC               | AD8196                  | 1    |                 | NRP     |
| Q8152    | TR               | 2SK3019                 | 1    | 2216520R2       | 11102   |
| Q8153    | TR               | 2SK3019                 | 1    | 2216520R2       |         |
| Q8154    | IC               | SN74CB3T3306DCT         | 1    | 22242454R2      |         |
| Q8155    | IC               | S-24CS02AFT-V-G         | 1    | 22242360R2      |         |
| Q8155 or | IC               | BR24L02FV-W             | (1)  | 22242069R2      |         |
| Q8158    | TR               | DTA144EE                | 1    | 2216380R2       |         |
| Q8159    | TR               | DTC144EE                | 1    | 2216390R2       |         |
| Q8174    | IC               | SN74CB3T3306DCT         | 1    | 22242454R2      |         |
| Q8175    | IC               | S-24CS02AFT-V-G         | 1    | 22242360R2      |         |
| Q8175 or | IC               | BR24L02FV-W             | (1)  | 22242069R2      |         |
| Q8178    | TR               | DTA144EE                | 1    | 2216380R2       |         |
| Q8179    | TR               | DTC144EE                | 1    | 2216390R2       |         |
| Q8305    | IC               | S-812C50BUC-C5ET2G      | 1    | 22242407R2      |         |
| Q8306    | IC               | TC7SZ08FU(TE85L_F)      | 1    | 22242071R2TO    |         |
| Q8306 or | IC               | NC7SZ08P5X_F042         | (1)  | 22242482R2      |         |
| Q8309    | TR ARRAY         | UM6K1N                  | 1    | 226066R2        |         |
| Q8355    | IC               | S-812C50BUC-C5ET2G      | 1    | 22242407R2      |         |

| Q8356    | IC              | TC7SZ08FU(TE85L_F)     | 1   | 22242071R2TO    |     |
|----------|-----------------|------------------------|-----|-----------------|-----|
| Q8356 or | IC              | NC7SZ08P5X_F042        | (1) | 22242482R2      |     |
| 28359    | TR ARRAY        | UM6K1N                 | 1   | 226066R2        |     |
| Q8401    | IC              | SII9134CTU             | 1   |                 | NRP |
| Q8404    | IC              | XC6213B182MR           | 1   | 22242443R2      |     |
| Q8405    | IC              | SN74CB3Q3305PWR        | 1   | 22242258R2      |     |
| Q8451    | IC              | SII9134CTU             | 1   |                 | NRP |
| Q8454    | IC              | XC6213B182MR           | 1   | 22242443R2      |     |
| Q8501    | IC              | SII9135CTU             | 1   |                 | NRP |
| Q8501 or | IC              | SII9135ACTU            | (1) |                 | NRP |
| Q8502    | IC              | XC6213B332MR           | 1   | 22242277R2      |     |
| Q8595    | IC              | BA18BC0FP              | 1   | 22278018DR2RH   |     |
| Q8596    | IC              | BA18BC0FP              | 1   | 22278018DR2RH   |     |
| Q8597    | IC              | BA18BC0FP              | 1   | 22278018DR2RH   |     |
| Q8645    | IC              | BA18BC0FP              | 1   | 22278018DR2RH   |     |
| Q8701    | IC(HDMI MEMORY) | MPD70F3716GC-8EA(0295) | 1   | 222W0054R302955 |     |
| Q8800    | IC              | ADV7401                | 1   | 22242254R3      |     |
| Q8803    | TR ARRAY        | UM6K1N                 | 1   | 226066R2        |     |
| Q8806    | IC              | BA18BC0FP              | 1   | 22278018DR2RH   |     |
| Q8807    | IC              | TC7WZU04FU(TE12L_F)    | 1   | 22242078R2TO    |     |
| 28808    | IC              | TC74VCX162244FT(EL_F)  | 1   | 2227C244DR2TO   |     |
| Q8809    | IC              | TC74VCX162244FT(EL_F)  | 1   | 2227C244DR2TO   |     |
| Q8810    | IC              | TC74VCX162244FT(EL_F)  | 1   | 2227C244DR2TO   |     |
| Q8811    | IC              | TC74VCX162827          | 1   | 22242395R2      |     |
| Q8812    | IC              | TC74VCX162827          | 1   | 22242395R2      |     |
| Q8813    | IC              | TC74VCX162827          | 1   | 22242395R2      |     |
| Q8814    | IC              | TC74VCX162827          | 1   | 22242395R2      |     |
| Q8815    | IC              | TC74VCX162827          | 1   | 22242395R2      |     |
| Q8816    | IC              | TC74VCX162827          | 1   | 22242395R2      |     |
| Q8817    | IC              | TC74VCX162827          | 1   | 22242395R2      |     |
| Q8818    | IC              | TC74VCX162827          | 1   | 22242395R2      |     |
| Q8860    | IC              | MAX4018ESD             | 1   | 22241440R2      |     |
| Q8861    | IC              | MAX4018ESD             | 1   | 22241440R2      |     |
| Q8901    | IC              | ADV7320                | 1   | 22242398R3      |     |
| Q8902    | IC              | NJM2391DL1-25          | 1   | 22278025DR2JR   |     |
| Q8931    | IC              | NJU7313AM              | 1   | 22242211R2      |     |
| Q8937    | IC              | LA7106M-TLM-E          | 1   | 22241465R2      |     |
| Q8951    | IC              | SPI-8010A              | 1   | 22242437R2      |     |
| Q8952    | IC              | SPI-8010A              | 1   | 22242437R2      |     |
| Q8953    | IC              | SPI-8010A              | 1   | 22242437R2      |     |
| 28954    | IC              | SPI-8010A              | 1   | 22242437R2      |     |
| Q8956    | TR              | DTC144EE               | 1   | 2216390R2       |     |
| Q8957    | TR              | DTC144EE               | 1   | 2216390R2       |     |
| Q8958    | TR              | DTC144EE               | 1   | 2216390R2       |     |
| Q8959    | TR              | DTC144EE               | 1   | 2216390R2       |     |
| Q8963    | TR              | DTC144EE               | 1   | 2216390R2       |     |
| D8301    | C-DIODE         | 1SS226(TE85L_F)        | 1   | 223266R2        |     |
| D8302    | C-DIODE         | 1SS352                 | 1   | 223234R2        |     |

| D8302 or             | C-DIODE            | 1SS355                     | (1) | 223269R2             |
|----------------------|--------------------|----------------------------|-----|----------------------|
| D8302 or<br>D8302 or | C-DIODE<br>C-DIODE | MA2J1110GL                 | (1) | 223302R2<br>223302R2 |
| D8302 01             | C-DIODE            | 1SS352                     | 1   | 223234R2             |
| D8303 or             | C-DIODE            | 1SS355                     | (1) | 223254R2<br>223269R2 |
| D8303 or             | C-DIODE            | MA2J1110GL                 | (1) | 223302R2             |
| D8351                | C-DIODE<br>C-DIODE | 1SS226(TE85L_F)            | 1   | 223266R2             |
| D8351<br>D8352       | C-DIODE<br>C-DIODE | 1SS3220(1E63L_F)<br>1SS352 | 1   | 223234R2             |
| D8352<br>D8352 or    | C-DIODE<br>C-DIODE | 1SS352<br>1SS355           | (1) | 223254R2<br>223269R2 |
| D8352 or<br>D8352 or | C-DIODE<br>C-DIODE | MA2J1110GL                 | (1) | 223302R2<br>223302R2 |
| D8352 01<br>D8353    |                    |                            |     |                      |
| D8353<br>D8353 or    | C-DIODE<br>C-DIODE | 1SS352<br>1SS355           | 1   | 223234R2<br>223269R2 |
|                      |                    |                            | (1) |                      |
| D8353 or             | C-DIODE            | MA2J1110GL                 | (1) | 223302R2             |
| D8701                | C-DIODE            | 1SS352                     | 1   | 223234R2             |
| D8701 or             | C-DIODE            | 1SS355                     | (1) | 223269R2             |
| D8701 or             | C-DIODE            | MA2J1110GL                 | (1) | 223302R2             |
| D8951                | DIODE              | RSX501L-20                 | 1   | 22380359R2           |
| D8952                | DIODE              | RSX501L-20                 | 1   | 22380359R2           |
| D8953                | DIODE              | RSX501L-20                 | 11  | 22380359R2           |
| D8954                | DIODE              | RSX501L-20                 | 11  | 22380359R2           |
| L8007                | EMIFIL             | BK1608LM182-T              | 1   | 230958R1             |
| L8023                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8042                | C-CARBON R         | RN72K1J-000JE              | 1   | 435030004R1          |
| L8101                | CHOKE COIL         | LBC2518T4R7M               | 1   | 231364M047R2         |
| L8102                | CHOKE COIL         | LBC2518T4R7M               | 1   | 231364M047R2         |
| L8151                | CHOKE COIL         | LBC2518T4R7M               | 1   | 231364M047R2         |
| L8152                | CHOKE COIL         | LBC2518T4R7M               | 1   | 231364M047R2         |
| L8400                | C-R NET            | MNR12E0APJ000              | 1   | 43464900002R2        |
| L8401                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8402                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8403                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8404                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8405                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8406                | C-R NET            | MNR12E0APJ000              | 1   | 43464900002R2        |
| L8407                | C-R NET            | MNR12E0APJ000              | 1   | 43464900002R2        |
| L8408                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8409                | C-R NET            | MNR12E0APJ000              | 1   | 43464900002R2        |
| L8450                | C-R NET            | MNR12E0APJ000              | 1   | 43464900002R2        |
| L8451                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8452                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8453                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8454                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8455                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8456                | C-R NET            | MNR12E0APJ000              | 1   | 43464900002R2        |
| L8457                | C-R NET            | MNR12E0APJ000              | 1   | 43464900002R2        |
| L8458                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8459                | C-R NET            | MNR12E0APJ000              | 1   | 43464900002R2        |
| L8501                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
| L8502                | CHOKE COIL         | BLM21PG221SN1              | 1   | 230949R2             |
|                      |                    | 22211 02210111             |     | 2007.720             |

| T 0502 | CHOVE CON    | DI MAIDGAAIGNI     |   | 22004002     |
|--------|--------------|--------------------|---|--------------|
| L8503  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8504  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8510  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8604  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8607  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8608  | EMIFIL       | BK1608LL241-T      | 1 | 230959R1     |
| L8701  | CHOKE COIL   | LBC2518T220M       | 1 | 231364M220R2 |
| L8801  | CHOKE COIL   | LBC2518T2R2M       | 1 | 231364M022R2 |
| L8802  | CHOKE COIL   | LBC2518T470M       | 1 | 231364M470R2 |
| L8803  | CHOKE COIL   | LBC2518T2R2M       | 1 | 231364M022R2 |
| L8804  | CHOKE COIL   | LBC2518T2R2M       | 1 | 231364M022R2 |
| L8806  | CHOKE COIL   | LBC2518T2R2M       | 1 | 231364M022R2 |
| L8807  | EMIFIL       | BK1608HS601-T      | 1 | 230984R1     |
| L8810  | C-CARBON R   | RN72K1J-000JE      | 1 | 435030004R1  |
| L8811  | C-CARBON R   | RN72K1J-000JE      | 1 | 435030004R1  |
| L8812  | C-CARBON R   | RN72K1J-000JE      | 1 | 435030004R1  |
| L8813  | C-CARBON R   | RN72K1J-000JE      | 1 | 435030004R1  |
| L8814  | C-CARBON R   | RN72K1J-220JE      | 1 | 435032204R1  |
| L8815  | C-CARBON R   | RN72K1J-000JE      | 1 | 435030004R1  |
| L8851  | CHOKE COIL   | MLF2012DR47J       | 1 | 231380J479R1 |
| L8852  | CHOKE COIL   | MLF2012DR47J       | 1 | 231380J479R1 |
| L8853  | CHOKE COIL   | MLF2012DR47J       | 1 | 231380J479R1 |
| L8854  | CHOKE COIL   | MLF2012DR22J       | 1 | 231380J229R1 |
| L8855  | CHOKE COIL   | MLF2012DR22J       | 1 | 231380J229R1 |
| L8856  | CHOKE COIL   | MLF2012DR22J       | 1 | 231380J229R1 |
| L8901  | CHOKE COIL   | LBC2518T2R2M       | 1 | 231364M022R2 |
| L8902  | CHOKE COIL   | LBC2518T2R2M       | 1 | 231364M022R2 |
| L8903  | CHOKE COIL   | LBC2518T2R2M       | 1 | 231364M022R2 |
| L8951  | CHOKE COIL   | RCP1317NP470M      | 1 | 231375M470   |
| L8952  | CHOKE COIL   | RCP1317NP470M      | 1 | 231375M470   |
| L8953  | CHOKE COIL   | RCP1317NP470M      | 1 | 231375M470   |
| L8954  | CHOKE COIL   | RCP1317NP470M      | 1 | 231375M470   |
| L8955  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8956  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8957  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8958  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8959  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8960  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8961  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8962  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| L8963  | CHOKE COIL   | BLM21PG221SN1      | 1 | 230949R2     |
| X8002  | CRYSTAL      | FCX-03-27MHz       | 1 | 3010353R2    |
| X8501  | CRYSTAL      | FCX-03 LF28.332MHz | 1 | 3010451R2    |
| X8701  | CERA LOCK    | CSTCR5M00G53-B0    | 1 | 3010356R2    |
| X8801  | CRYSTAL      | FCX-03-28.6363MHz  | 1 | 3010408R2    |
| C8001  | C-CERA C     | CK725B1H-102K1     | 1 | 332101025R1  |
| C8003  | CHIP ELECT C | CEWX4V-22M         | 1 | 3981G2207R2  |
| C8004  | C-CERA C     | CK725F1A-105Z1     | 1 | 332181050R1  |
| 2300-1 | CERTIC       | CIL/231 111 10321  |   | 552101050141 |

| G9005          | C CEP A C    | CV725D111 102V1 | 4 | 222101025D1 |
|----------------|--------------|-----------------|---|-------------|
| C8005          | C-CERA C     | CK725E1A 10571  | 1 | 332101025R1 |
| C8006          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8007<br>C8008 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
|                | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8009          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8010          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8011          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8012          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8013          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8014          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8015          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8016          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8017          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8018          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8019          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8020          | CHIP ELECT C | CEWX4V-22M      | 1 | 3981G2207R2 |
| C8021          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8023          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8024          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8025          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8026          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8027          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8028          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8029          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8030          | C-CERA C     | CC725CH1H-102J1 | 1 | 342101024R1 |
| C8031          | C-CERA C     | CC725CH1H-102J1 | 1 | 342101024R1 |
| C8032          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8033          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8034          | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8035          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8036          | CHIP ELECT C | CEWX4V-100M     | 1 | 3981G1017R2 |
| C8037          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8040          | C-CERA C     | CC725CH1H-102J1 | 1 | 342101024R1 |
| C8041          | C-CERA C     | CC725CH1H-102J1 | 1 | 342101024R1 |
| C8043          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8044          | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8045          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8046          | CHIP ELECT C | CEWX4V-100M     | 1 | 3981G1017R2 |
| C8047          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8051          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8053          | CHIP ELECT C | CEWX4V-22M      | 1 | 3981G2207R2 |
| C8054          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8055          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8056          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8057          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8058          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8059          | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8060          | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
|                |              |                 |   |             |

| C8061    | C-CERA C     | CK725B1H-102K1                   | 1   | 332101025R1                |
|----------|--------------|----------------------------------|-----|----------------------------|
| C8062    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8063    | C-CERA C     | CK725B1H-102K1                   | 1   | 332101025R1                |
| C8064    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8065    | C-CERA C     | CK725B1H-102K1                   | 1   | 332101025R1                |
| C8066    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8067    | C-CERA C     | CK725B1H-102K1                   | 1   | 332101025R1                |
| C8068    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8069    | C-CERA C     | CK725B1H-102K1                   | 1   | 332101025R1                |
| C8070    | CHIP ELECT C | CEWX4V-22M                       | 1   | 3981G2207R2                |
| C8071    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8073    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8074    | C-CERA C     | CK725B1H-102K1                   | 1   | 332101025R1                |
| C8075    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8076    | C-CERA C     | CK725B1H-102K1                   | 1   | 332101050K1                |
| C8077    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8078    | C-CERA C     | CK725B1H-102K1                   | 1   | 332101050K1<br>332101025R1 |
| C8079    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8079    | C-CERA C     | CC725CH1H-102J1                  | 1   | 342101024R1                |
| C8080    | C-CERA C     | CC725CH1H-102J1                  | 1   | 342101024R1<br>342101024R1 |
| C8083    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8083    | C-CERA C     | CK725F1A-103Z1                   | 1   | 332151030K1<br>332151040R1 |
| C8085    | C-CERA C     | CK725F1H-104Z1<br>CK725F1A-105Z1 | 1   | 332181050R1                |
| C8085    | CHIP ELECT C |                                  | 1   |                            |
|          |              | CEWX4V-100M                      |     | 3981G1017R2                |
| C8087    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8090    | C-CERA C     | CC725CH1H-102J1                  | 1   | 342101024R1                |
| C8091    | C-CERA C     | CC725CH1H-102J1                  | 1   | 342101024R1                |
| C8093    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8094    | C-CERA C     | CK725F1H-104Z1                   | 1   | 332151040R1                |
| C8095    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8096    | CHIP ELECT C | CEWX4V-100M                      | 1   | 3981G1017R2                |
| C8097    | C-CERA C     | CK725F1A-105Z1                   | 1   | 332181050R1                |
| C8149    | C-CERA C     | CK725F1H-104Z1                   | 1   | 332151040R1                |
| C8150    | C-CERA C     | CK725F1H-104Z1                   | 1   | 332151040R1                |
| C8163    | CHIP TANTAL  | F93-6.3V-100M                    | 1   | 395521017R2                |
| C8163 or | CHIP TANTAL  | TCSCS0J107MBAR                   | (1) | 396521017R2                |
| C8164    | C-CERA C     | CK725F1H-104Z1                   | 1   | 332151040R1                |
| C8165    | CHIP TANTAL  | F93-6.3V-100M                    | 1   | 395521017R2                |
| C8165 or | CHIP TANTAL  | TCSCS0J107MBAR                   | (1) | 396521017R2                |
| C8166    | C-CERA C     | CK725F1H-104Z1                   | 1   | 332151040R1                |
| C8167    | C-CERA C     | CC725CH1H-180J1                  | 1   | 342101804R1                |
| C8168    | C-CERA C     | CC725CH1H-180J1                  | 1   | 342101804R1                |
| C8169    | CHIP TANTAL  | F93-6.3V-100M                    | 1   | 395521017R2                |
| C8169 or | CHIP TANTAL  | TCSCS0J107MBAR                   | (1) | 396521017R2                |
| C8170    | C-CERA C     | CK725F1H-104Z1                   | 1   | 332151040R1                |
| C8171    | CHIP TANTAL  | F93-6.3V-100M                    | 1   | 395521017R2                |
| C8171 or | CHIP TANTAL  | TCSCS0J107MBAR                   | (1) | 396521017R2                |
| C8172    | C-CERA C     | CK725F1H-104Z1                   | 1   | 332151040R1                |

| C8173    | CHIP TANTAL | TCFGA-1C106M8R | 1   | 396041007R2 |
|----------|-------------|----------------|-----|-------------|
| C8173 or | CHIP TANTAL | TCSCS1C106MAAR | (1) | 396541007R2 |
| C8174    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8175    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8176    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8177    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8178    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8179    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8180    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8181    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8182    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8183    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8184    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8185    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8186    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8187    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8188    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8189    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8190    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8191    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8192    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8193    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8194    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8195    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8196    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8197    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8198    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8199    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8200    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8201    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8202    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8203    | CHIP TANTAL | TCFGA-1C106M8R | 1   | 396041007R2 |
| C8203 or | CHIP TANTAL | TCSCS1C106MAAR | (1) | 396541007R2 |
| C8204    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8205    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8206    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8207    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8208    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8209    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8210    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8211    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8212    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8213    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8214    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8215    | CHIP TANTAL | TCFGA-1C106M8R | 1   | 396041007R2 |
| C8215 or | CHIP TANTAL | TCSCS1C106MAAR | (1) | 396541007R2 |
| C8216    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8217    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |

| C8218    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
|----------|-------------|----------------|-----|-------------|
| C8219    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8220    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8221    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8222    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8223    | CHIP TANTAL | TCFGA-1C106M8R | 1   | 396041007R2 |
| C8223 or | CHIP TANTAL | TCSCS1C106MAAR | (1) | 396541007R2 |
| C8224    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8225    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8226    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8227    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8228    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8229    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8230    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8231    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8232    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8233    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8234    | CHIP TANTAL | TCFGA-1C106M8R | 1   | 396041007R2 |
| C8234 or | CHIP TANTAL | TCSCS1C106MAAR | (1) | 396541007R2 |
| C8235    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8236    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8237    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8238    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8239    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8240    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8241    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8242    | CHIP TANTAL | TCFGA-1C106M8R | 1   | 396041007R2 |
| C8242 or | CHIP TANTAL | TCSCS1C106MAAR | (1) | 396541007R2 |
| C8243    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8244    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8245    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8246    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8247    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8248    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8249    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8250    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8251    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8252    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8253    | CHIP TANTAL | TCFGA-1C106M8R | 1   | 396041007R2 |
| C8253 or | CHIP TANTAL | TCSCS1C106MAAR | (1) | 396541007R2 |
| C8254    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8255    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8256    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8257    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8258    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8259    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8260    | C-CERA C    | CK725F1H-104Z1 | 1   | 332151040R1 |
| C8261    | CHIP TANTAL | F93-10V-220M   | 1   | 395532217R2 |

| C8261 or | CHIP TANTAL  | TCSCS1A227MDAR  | (1) | 396532217R2 |   |
|----------|--------------|-----------------|-----|-------------|---|
| C8262    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8263    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8264    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8265    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8266    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8267    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8268    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8269    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8270    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8271    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8272    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8273    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8274    | CHIP TANTAL  | TCFGA-1C106M8R  | 1   | 396041007R2 |   |
| C8274 or | CHIP TANTAL  | TCSCS1C106MAAR  | (1) | 396541007R2 |   |
| C8275    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8276    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8277    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8278    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8279    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8280    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8281    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8282    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8283    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8284    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8285    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8286    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8287    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8288    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8289    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8290    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8291    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8292    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8293    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8294    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8295    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8326    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8327    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8328    | CHIP ELECT C | CEWX16V-22M     | 1   | 398142207R2 |   |
| C8329    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8330    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8348    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |   |
| C8376    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8377    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8378    | CHIP ELECT C | CEWX16V-22M     | 1   | 398142207R2 |   |
| C8379    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8380    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 | *************************************** |
| C8398    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |   |
|          |              |                 |     |             |   |

| C8399    | C-CERA C     | СС725СН1Н-102J1                 | 1   | 342101024R1  |  |
|----------|--------------|---------------------------------|-----|--------------|--|
| C8401    | CHIP ELECT C | CEWX4V-22M                      | 1   | 3981G2207R2  |  |
| C8402    | CHIP ELECT C | CEWX4V-22M                      | 1   | 3981G2207R2  |  |
| C8403    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8404    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8405    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8406    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8407    | C-CERA C     | CC725CH1H-100D1                 | 1   | 3421010024R1 |  |
| C8408    | CHIP ELECT C | CEWX4V-22M                      | 1   | 3981G2207R2  |  |
| C8409    | CHIP ELECT C | CEWX4V-22M                      | 1   | 3981G2207R2  |  |
| C8410    | C-CERA C     | CEW X4V-22IVI<br>CK725F1A-105Z1 | 1   | 332181050R1  |  |
| C8411    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8411    | C-CERA C     |                                 | 1   |              |  |
|          |              | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8413    | C-CERA C     | CC725CH1H-102J1                 |     | 342101024R1  |  |
| C8414    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8415    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8416    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8417    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8418    | CHIP ELECT C | CEWX4V-22M                      | 1   | 3981G2207R2  |  |
| C8419    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8420    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8421    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8422    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8423    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8424    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8425    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8426    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8427    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8428    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8429    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8430    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8431    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8432    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8433    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8434    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8435    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8441    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8442    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8443    | CHIP ELECT C | CEWX4V-220M                     | 1   | 3981G2217R2  |  |
| C8444    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8449    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8451    | CHIP TANTAL  | TCFGA-1C106M8R                  | 1   | 396041007R2  |  |
| C8451 or | CHIP TANTAL  | TCSCS1C106MAAR                  | (1) | 396541007R2  |  |
| C8452    | CHIP TANTAL  | TCFGA-1C106M8R                  | 1   | 396041007R2  |  |
| C8452 or | CHIP TANTAL  | TCSCS1C106MAAR                  | (1) | 396541007R2  |  |
| C8453    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
| C8454    | C-CERA C     | CC725CH1H-102J1                 | 1   | 342101024R1  |  |
| C8455    | C-CERA C     | CK725F1A-105Z1                  | 1   | 332181050R1  |  |
|          |              | 011,20111110021                 |     |              |  |

| C8456    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
|----------|--------------|-----------------|-----|-------------|--|
| C8457    | C-CERA C     | CC725CH1H-100D1 | 1   | 342101002R1 |  |
| C8458    | CHIP ELECT C | CEWX4V-22M      | 1   | 3981G2207R2 |  |
| C8459    | CHIP TANTAL  | TCFGA-1C106M8R  | 1   | 396041007R2 |  |
| C8459 or | CHIP TANTAL  | TCSCS1C106MAAR  | (1) | 396541007R2 |  |
| C8460    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8461    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8462    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8463    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8464    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8465    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8466    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8467    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8468    | CHIP TANTAL  | TCFGA-1C106M8R  | 1   | 396041007R2 |  |
| C8468 or | CHIP TANTAL  | TCSCS1C106MAAR  | (1) | 396541007R2 |  |
| C8469    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8470    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8471    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8472    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8473    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8474    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8475    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8476    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8477    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8478    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8479    | C-CERA C     | СС725СН1Н-102J1 | 1   | 342101024R1 |  |
| C8480    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8481    | C-CERA C     | СС725СН1Н-102J1 | 1   | 342101024R1 |  |
| C8482    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8483    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8484    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8485    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8491    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8492    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8493    | CHIP ELECT C | CEWX4V-220M     | 1   | 3981G2217R2 |  |
| C8501    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8502    | CHIP ELECT C | CEWX4V-22M      | 1   | 3981G2207R2 |  |
| C8503    | C-CERA C     | CK725B1H-102K1  | 1   | 332101025R1 |  |
| C8504    | C-CERA C     | CK725B1H-102K1  | 1   | 332101025R1 |  |
| C8505    | CHIP ELECT C | CEWX4V-22M      | 1   | 3981G2207R2 |  |
| C8506    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8507    | C-CERA C     | CK725B1H-102K1  | 1   | 332101025R1 |  |
| C8508    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8509    | C-CERA C     | CK725B1H-102K1  | 1   | 332101025R1 |  |
| C8510    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8511    | C-CERA C     | CK725B1H-102K1  | 1   | 332101025R1 |  |
| C8512    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8513    | C-CERA C     | CK725B1H-102K1  | 1   | 332101025R1 |  |

| C0514 | C CEDA C     | CV705E1 & 10571 | 1 | 222191050D1 |
|-------|--------------|-----------------|---|-------------|
| C8514 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8515 | C-CERA C     | CK725E1A 10571  | 1 | 332101025R1 |
| C8516 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8517 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8518 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8519 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8520 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8521 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8522 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8523 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8524 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8529 | CHIP ELECT C | CEWX4V-22M      | 1 | 3981G2207R2 |
| C8530 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8531 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8532 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8533 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8534 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8535 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8536 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8537 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8538 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8539 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8540 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8541 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8542 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8543 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8544 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8545 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8546 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8547 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8548 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8549 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8550 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8551 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8552 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8553 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8554 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8555 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8556 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8557 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8558 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8559 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8560 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8561 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8562 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |
| C8563 | C-CERA C     | CK725B1H-102K1  | 1 | 332101025R1 |
| C8564 | CHIP ELECT C | CEWX4V-22M      | 1 | 3981G2207R2 |
| C8565 | CHIP ELECT C | CEWX4V-22M      | 1 | 3981G2207R2 |
|       | DDDC1 C      | QD 11111 2211   | 1 |             |

| C0566 | C CEDA C     | CV705D1H 100V1             | 1 | 222101025D1 |  |
|-------|--------------|----------------------------|---|-------------|--|
| C8566 | C-CERA C     | CK725B1H-102K1             | 1 | 332101025R1 |  |
| C8567 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8568 | CHIP ELECT C | CEWX4V-22M                 | 1 | 3981G2207R2 |  |
| C8569 | C-CERA C     | CK725B1H-102K1             | 1 | 332101025R1 |  |
| C8570 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8571 | CHIP ELECT C | CEWX4V-22M                 | 1 | 3981G2207R2 |  |
| C8572 | C-CERA C     | CK725B1H-102K1             | 1 | 332101025R1 |  |
| C8573 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8574 | C-CERA C     | CC725CH1H-120J1            | 1 | 342101204R1 |  |
| C8575 | C-CERA C     | CC725CH1H-120J1            | 1 | 342101204R1 |  |
| C8601 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8602 | CHIP ELECT C | CEWX4V-100M                | 1 | 3981G1017R2 |  |
| C8604 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8605 | CHIP ELECT C | CEWX4V-220M                | 1 | 3981G2217R2 |  |
| C8608 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8609 | CHIP ELECT C | CEWX4V-100M                | 1 | 3981G1017R2 |  |
| C8675 | CHIP ELECT C | CEWX4V-100M                | 1 | 3981G1017R2 |  |
| C8676 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8687 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8701 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8702 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8703 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8704 | CHIP ELECT C | CEWX50V-4.7M               | 1 | 398180477R2 |  |
| C8705 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8706 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8707 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8708 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8709 | CHIP ELECT C | CEWX4V-220M                | 1 | 3981G2217R2 |  |
| C8710 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8725 | CHIP ELECT C | CEWX4V-100M                | 1 | 3981G1017R2 |  |
| C8726 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8801 | CHIP ELECT C | CEWX4V-100M                | 1 | 3981G1017R2 |  |
| C8802 | C-CERA C     | CK725B1C-104K1             | 1 | 332121045R1 |  |
| C8803 | C-CERA C     | CK725B1C-104K1             | 1 | 332121045R1 |  |
| C8804 | C-CERA C     | CK725B1C-104K1             | 1 | 332121045R1 |  |
| C8805 | C-CERA C     | CK725B1C-104K1             | 1 | 332121045R1 |  |
| C8806 | C-CERA C     | CK725B1C-104K1             | 1 | 332121045R1 |  |
| C8807 | C-CERA C     | CK725B1C-104K1             | 1 | 332121045R1 |  |
| C8808 | C-CERA C     | CK725F1C-104K1             | 1 | 332181050R1 |  |
| C8809 | C-CERA C     | CK725F1A-105Z1             | 1 | 332181050R1 |  |
| C8810 | CHIP ELECT C | CEWX16V-10M                | 1 | 398141007R2 |  |
| C8811 | CHIP ELECT C | CEWX16V-10M<br>CEWX16V-10M | 1 | 398141007R2 |  |
| C8812 | C-CERA C     | CK725F1H-104Z1             | 1 | 332151040R1 |  |
| C8812 |              |                            | 1 |             |  |
|       | C-CERA C     | CK725F1H-104Z1             | 1 | 332151040R1 |  |
| C8814 | C-CERA C     | CK725F1H-104Z1             |   | 332151040R1 |  |
| C8815 | C-CERA C     | CK725F1H-104Z1             | 1 | 332151040R1 |  |
| C8816 | C-CERA C     | CK725F1H-104Z1             | 1 | 332151040R1 |  |
| C8817 | CHIP ELECT C | CEWX16V-10M                | 1 | 398141007R2 |  |

| C8818 | CHIP ELECT C | CEWX16V-10M     | 1 | 398141007R2 |
|-------|--------------|-----------------|---|-------------|
| C8819 | C-CERA C     | CC725CH1H-102J1 | 1 | 342101024R1 |
| C8820 | C-CERA C     | CC725CH1H-101J1 | 1 | 342101014R1 |
| C8821 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8822 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8823 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8824 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8825 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8826 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8827 | C-CERA C     | CK725B1H-223K1  | 1 | 332102235R1 |
| C8828 | C-CERA C     | CK725B1C-823K1  | 1 | 332128235R1 |
| C8829 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8830 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8831 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8833 | C-CERA C     | CC725CH1H-070D1 | 1 | 342100702R1 |
| C8834 | C-CERA C     | CC725CH1H-070D1 | 1 | 342100702R1 |
| C8835 | CHIP ELECT C | CEWX4V-100M     | 1 | 3981G1017R2 |
| C8836 | CHIP ELECT C | CEWX4V-100M     | 1 | 3981G1017R2 |
| C8837 | CHIP ELECT C | CEWX4V-100M     | 1 | 3981G1017R2 |
| C8838 | C-CERA C     | CC725CH1H-470J1 | 1 | 342104704R1 |
| C8839 | C-CERA C     | CC725CH1H-470J1 | 1 | 342104704R1 |
| C8840 | C-CERA C     | CC725CH1H-470J1 | 1 | 342104704R1 |
| C8841 | CHIP ELECT C | CEWX16V-10M     | 1 | 398141007R2 |
| C8843 | CHIP ELECT C | CEWX4V-100M     | 1 | 3981G1017R2 |
| C8848 | C-CERA C     | CC725CH1H-330J1 | 1 | 342103304R1 |
| C8849 | C-CERA C     | CC725CH1H-330J1 | 1 | 342103304R1 |
| C8850 | C-CERA C     | CC725CH1H-330J1 | 1 | 342103304R1 |
| C8851 | C-CERA C     | CC725CH1H-820J1 | 1 | 342108204R1 |
| C8852 | C-CERA C     | CC725CH1H-820J1 | 1 | 342108204R1 |
| C8853 | C-CERA C     | CC725CH1H-820J1 | 1 | 342108204R1 |
| C8854 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8855 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8856 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8857 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8858 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8859 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8860 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8861 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8862 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8863 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8864 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8865 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8866 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8867 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8868 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8869 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8870 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
| C8871 | C-CERA C     | CK725F1H-104Z1  | 1 | 332151040R1 |
|       |              |                 |   |             |

| C8872    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
|----------|--------------|-----------------|-----|-------------|---|
| C8873    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8874    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8875    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8876    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8877    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8878    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8879    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8880    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8881    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8882    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8883    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8884    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8885    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8886    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8887    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8888    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8889    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8890    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8891    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8892    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8893    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 | t |
| C8894    | C-CERA C     | CK725F1H-104Z1  | 1   |             |   |
| C8895    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8896    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8897    |              |                 | 1   | 332151040R1 |   |
|          | C-CERA C     | CK725F1H-104Z1  |     | 332151040R1 |   |
| C8898    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8899    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8901    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8902    | CHIP ELECT C | CEWX4V-220M     | 1   | 3981G2217R2 |   |
| C8903    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8904    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8905    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |   |
| C8906    | C-FILM C     | ECHU50V-392J    | 1   | 373023924R2 |   |
| C8907    | C-CERA C     | CC725CH1H-821J1 | 1   | 342108214R1 |   |
| C8908    | C-CERA C     | CK725B1C-104K1  | 1   | 332121045R1 |   |
| C8909    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8910    | C-CERA C     | CK725B1C-104K1  | 1   | 332121045R1 |   |
| C8911    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8912    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8914    | CHIP ELECT C | CEWX4V-220M     | 1   | 3981G2217R2 |   |
| C8916    | CHIP ELECT C | CEWX4V-220M     | 1   | 3981G2217R2 |   |
| C8917    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |   |
| C8918    | CHIP ELECT C | CEWX16V-47M     | 1   | 398144707R2 |   |
| C8919    | CHIP TANTAL  | F93-10V-47M     | 1   | 395534707R2 |   |
| C8919 or | CHIP TANTAL  | TCSCS1A476MBAR  | (1) | 396534707R2 |   |
| C8920    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |   |
| C8921    | CHIP TANTAL  | F93-10V-220M    | 1   | 395532217R2 |   |

| C8921 or | CHIP TANTAL  | TCSCS1A227MDAR  | (1) | 396532217R2 |  |
|----------|--------------|-----------------|-----|-------------|--|
| C8922    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |  |
| C8923    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |  |
| C8924    | C-CERA C     | CC725CH1H-120J1 | 1   | 342101204R1 |  |
| C8925    | C-CERA C     | CC725CH1H-120J1 | 1   | 342101204R1 |  |
| C8931    | CHIP ELECT C | CEWX6.3V-330M   | 1   | 398123317R2 |  |
| C8932    | CHIP ELECT C | CEWX6.3V-330M   | 1   | 398123317R2 |  |
| C8933    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8934    | C-CERA C     | CK725F1H-103Z1  | 1   | 332151030R1 |  |
| C8935    | C-CERA C     | CK725F1H-103Z1  | 1   | 332151030R1 |  |
| C8950    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |  |
| C8951    | C-CERA C     | CK725F1H-104Z1  | 1   | 332151040R1 |  |
| C8952    | CHIP TANTAL  | TCFGA-1C106M8R  | 1   | 396041007R2 |  |
| C8952 or | CHIP TANTAL  | TCSCS1C106MAAR  | (1) | 396541007R2 |  |
| C8955    | CD C         | UCD1A471MNL1GS  | 1   | 396634717R2 |  |
| C8956    | CD C         | UCD1A471MNL1GS  | 1   | 396634717R2 |  |
| C8957    | CD C         | UCD1A471MNL1GS  | 1   | 396634717R2 |  |
| C8958    | CD C         | UCD1A471MNL1GS  | 1   | 396634717R2 |  |
| C8959    | C-CERA C     | CK725B1H-682K1  | 1   | 332106825R1 |  |
| C8960    | C-CERA C     | CK725B1H-682K1  | 1   | 332106825R1 |  |
| C8961    | C-CERA C     | CK725B1H-682K1  | 1   | 332106825R1 |  |
| C8962    | C-CERA C     | CK725B1H-682K1  | 1   | 332106825R1 |  |
| C8963    | C-CERA C     | CK725B1H-223K1  | 1   | 332102235R1 |  |
| C8964    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8965    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8966    | C-CERA C     | CC725CH1H-102J1 | 1   | 342101024R1 |  |
| C8967    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8968    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8969    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8970    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8971    | C-CERA C     | CK725F1H-473Z1  | 1   | 332154730R1 |  |
| C8972    | C-CERA C     | CK725F1H-473Z1  | 1   | 332154730R1 |  |
| C8973    | C-CERA C     | CK725F1H-473Z1  | 1   | 332154730R1 |  |
| C8974    | C-CERA C     | CK725F1H-473Z1  | 1   | 332154730R1 |  |
| C8975    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8976    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8977    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8978    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8979    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8980    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8981    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8982    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8983    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8984    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8985    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8986    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8989    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
| C8990    | C-CERA C     | CK725F1A-105Z1  | 1   | 332181050R1 |  |
|          |              |                 |     |             |  |

| C8991 | C-CERA C   | CK725F1A-105Z1                 | 1 | 332181050R1                |   |
|-------|------------|--------------------------------|---|----------------------------|---|
| C8992 | C-CERA C   | CK725F1A-105Z1                 | 1 | 332181050R1                |   |
| C8993 | CDC        | UCD1E221MNL1GS                 | 1 | 396652217R2                |   |
| C8994 | CD C       | UCD1E221MNL1GS                 | 1 | 396652217R2                |   |
| C8995 | CD C       | UCD1E221MNL1GS                 | 1 | 396652217R2                |   |
| C8996 | CD C       | UCD1E221MNL1GS                 | 1 | 396652217R2                |   |
| C8997 | C-CERA C   | CK725F1A-105Z1                 | 1 | 332181050R1                |   |
| C8998 | C-CERA C   | CK725F1A-105Z1                 | 1 | 332181050R1                |   |
| C8999 | C-CERA C   | CK725F1A-105Z1                 | 1 | 332181050R1                |   |
| R8001 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R8004 | C-CARBON R | RN72K1J-472JE                  | 1 | 435034724R1                |   |
| R8005 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R8006 | C-CARBON R | RN72K1J-330JE                  | 1 | 43503304R1                 |   |
| R8012 | C-CARBON R | RN72K1J-473JE                  | 1 | 435034734R1                |   |
| R8013 | C-CARBON R | RN72K1J-473JE<br>RN72K1J-102JE | 1 | 435031024R1                |   |
| R8014 | C-CARBON R | RN72K1J-102JE<br>RN72K1J-562JE | 1 | 435035624R1                |   |
| R8015 | C-CARBON R | RN72K1J-502JE<br>RN72K1J-562JE | 1 | 435035624R1<br>435035624R1 |   |
| R8016 | C-CARBON R | RN72K1J-302JE<br>RN72K1J-000JE | 1 | 435030004R1                |   |
| R8018 | C-CARBON R | RN72K1J-000JE<br>RN72K1J-473JE | 1 | 435034734R1                |   |
| R8019 | C-CARBON R | RN72K1J-473JE<br>RN72K1J-000JE | 1 | 435030004R1                |   |
| R8020 |            |                                | 1 |                            |   |
|       | C-CARBON R | RN72K1J-000JE                  |   | 435030004R1                |   |
| R8021 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                |   |
| R8023 | C-CARBON R | RN72K1J-473JE                  | 1 | 435034734R1                | *************************************** |
| R8032 | C-CARBON R | RN72K1J-473JE                  | 1 | 435034734R1                |   |
| R8033 | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |   |
| R8034 | C-CARBON R | RN72K1J-562JE                  | 1 | 435035624R1                |   |
| R8035 | C-CARBON R | RN72K1J-562JE                  | 1 | 435035624R1                |   |
| R8036 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                |   |
| R8038 | C-CARBON R | RN72K1J-473JE                  | 1 | 435034734R1                |   |
| R8039 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                |   |
| R8040 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                |   |
| R8041 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                |   |
| R8043 | C-CARBON R | RN72K1J-473JE                  | 1 | 435034734R1                |   |
| R8051 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R8054 | C-CARBON R | RN72K1J-472JE                  | 1 | 435034724R1                |   |
| R8055 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                |   |
| R8062 | C-CARBON R | RN72K1J-473JE                  | 1 | 435034734R1                |   |
| R8063 | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |   |
| R8064 | C-CARBON R | RN72K1J-562JE                  | 1 | 435035624R1                |   |
| R8065 | C-CARBON R | RN72K1J-562JE                  | 1 | 435035624R1                |   |
| R8066 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                |   |
| R8068 | C-CARBON R | RN72K1J-473JE                  | 1 | 435034734R1                |   |
| R8069 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                |   |
| R8070 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                |   |
| R8071 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                |   |
| R8073 | C-CARBON R | RN72K1J-473JE                  | 1 | 435034734R1                |   |
| R8082 | C-CARBON R | RN72K1J-473JE                  | 1 | 435034734R1                |   |
| R8083 | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                |   |
|       |            |                                |   |                            |   |

| D0004 | C CARROY P | D.VZOV. V. COV. |   | 425025 COARD |
|-------|------------|-----------------|---|--------------|
| R8084 | C-CARBON R | RN72K1J-562JE   | 1 | 435035624R1  |
| R8085 | C-CARBON R | RN72K1J-562JE   | 1 | 435035624R1  |
| R8086 | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1  |
| R8088 | C-CARBON R | RN72K1J-473JE   | 1 | 435034734R1  |
| R8089 | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1  |
| R8090 | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1  |
| R8091 | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1  |
| R8093 | C-CARBON R | RN72K1J-473JE   | 1 | 435034734R1  |
| R8099 | C-CARBON R | RN72K1J-330JE   | 1 | 435033304R1  |
| R8106 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8107 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8110 | C-CARBON R | RN72K1J-470JE   | 1 | 435034704R1  |
| R8111 | C-CARBON R | RN72K1J-101JE   | 1 | 435031014R1  |
| R8112 | C-CARBON R | RN72K1J-101JE   | 1 | 435031014R1  |
| R8113 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8114 | C-CARBON R | RN72K1J-101JE   | 1 | 435031014R1  |
| R8115 | C-CARBON R | RN72K1J-101JE   | 1 | 435031014R1  |
| R8116 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8118 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8119 | C-CARBON R | RN72K1J-332JE   | 1 | 435033324R1  |
| R8120 | C-CARBON R | RN72K2B-000JE   | 1 | 433220004R1  |
| R8121 | C-CARBON R | RN72K1J-331JE   | 1 | 435033314R1  |
| R8122 | C-CARBON R | RN72K2B-000JE   | 1 | 433220004R1  |
| R8123 | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1  |
| R8124 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8125 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8126 | C-CARBON R | RN72K1J-271JE   | 1 | 435032714R1  |
| R8127 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8128 | C-CARBON R | RN72K1J-750FE   | 1 | 435037502R1  |
| R8129 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8130 | C-CARBON R | RN72K1J-750FE   | 1 | 435037502R1  |
| R8136 | C-CARBON R | RN72K1J-331JE   | 1 | 435033314R1  |
| R8140 | C-CARBON R | RN72K1J-331JE   | 1 | 435033314R1  |
| R8141 | C-CARBON R | RN72K1J-331JE   | 1 | 435033314R1  |
| R8147 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8149 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8150 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8151 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8154 | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1  |
| R8157 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8158 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8168 | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1  |
| R8197 | C-CARBON R | RN72K1J-472JE   | 1 | 435034724R1  |
| R8198 | C-CARBON R | RN72K1J-331JE   | 1 | 435033314R1  |
| R8251 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8323 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1  |
| R8324 | C-CARBON R | RN72K1J-472JE   | 1 | 435034724R1  |
| R8325 | C-CARBON R | RN72K1J-473JE   | 1 | 435034734R1  |
|       |            |                 |   |              |

| R8326 | C-CARBON R | RN72K1J-473JE              | 1 | 435034734R1                    |  |
|-------|------------|----------------------------|---|--------------------------------|--|
| R8334 | C-CARBON R | RN72K1J-222JE              | 1 | 435032224R1                    |  |
| R8335 | C-CARBON R | RN72K1J-222JE              | 1 | 435032224R1                    |  |
| R8341 | C-CARBON R | RN72K2E-470JE              | 1 | 435224704R1                    |  |
| R8373 | C-CARBON R | RN72K1J-103JE              | 1 | 435031034R1                    |  |
| R8374 | C-CARBON R | RN72K1J-472JE              | 1 | 435034724R1                    |  |
| R8375 | C-CARBON R | RN72K1J-473JE              | 1 | 435034734R1                    |  |
| R8376 | C-CARBON R | RN72K1J-473JE              | 1 | 435034734R1                    |  |
| R8384 | C-CARBON R | RN72K1J-222JE              | 1 | 435032224R1                    |  |
| R8385 | C-CARBON R | RN72K1J-222JE              | 1 | 435032224R1                    |  |
| R8391 | C-CARBON R | RN72K2E-470JE              | 1 | 435224704R1                    |  |
| R8401 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2                  |  |
| R8402 | C-CARBON R | RN72K1J-220JE              | 1 | 435032204R1                    |  |
| R8403 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2                  |  |
| R8404 | C-CARBON R | RN72K1J-220JE              | 1 | 435032204R1                    |  |
| R8405 | C-CARBON R | RN72K1J-220JE              | 1 | 435032204R1                    |  |
| R8406 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2                  |  |
| R8407 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2                  |  |
| R8409 | C-CARBON R | RN72K1J-472JE              | 1 | 435034724R1                    |  |
| R8410 | C-CARBON R | RN72K1J-681FE              | 1 | 435036812R1                    |  |
| R8411 | C-CARBON R | RN72K1J-472JE              | 1 | 435034724R1                    |  |
| R8416 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2                  |  |
| R8417 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2<br>43484722004R2 |  |
| R8418 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2                  |  |
| R8419 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2<br>43484722004R2 |  |
| R8420 | C-R NET    |                            | 1 | 43484722004R2<br>43484722004R2 |  |
| R8421 | C-R NET    | RM7LJ220X04<br>RM7LJ220X04 | 1 | 43484722004R2<br>43484722004R2 |  |
| R8422 |            |                            |   |                                |  |
|       | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2                  |  |
| R8423 | C-R NET    | RM7LJ220X04                |   | 43484722004R2                  |  |
| R8424 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2                  |  |
| R8425 | C-CARBON R | RN72K1J-220JE              | 1 | 435032204R1                    |  |
| R8429 | C-CARBON R | RN72K1J-220JE              | 1 | 435032204R1                    |  |
| R8431 | C-CARBON R | RN72K1J-472JE              | 1 | 435034724R1                    |  |
| R8432 | C-CARBON R | RN72K1J-220JE              | 1 | 435032204R1                    |  |
| R8442 | C-CARBON R | RN72K1J-102JE              | 1 | 435031024R1                    |  |
| R8443 | C-CARBON R | RN72K1J-220JE              | 1 | 435032204R1                    |  |
| R8444 | C-CARBON R | RN72K1J-000JE              | 1 | 435030004R1                    |  |
| R8446 | C-CARBON R | RN72K1J-000JE              | 1 | 435030004R1                    |  |
| R8447 | C-CARBON R | RN72K1J-000JE              | 1 | 435030004R1                    |  |
| R8451 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2                  |  |
| R8452 | C-CARBON R | RN72K1J-220JE              | 1 | 435032204R1                    |  |
| R8453 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2                  |  |
| R8454 | C-CARBON R | RN72K1J-220JE              | 1 | 435032204R1                    |  |
| R8455 | C-CARBON R | RN72K1J-220JE              | 1 | 435032204R1                    |  |
| R8456 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2                  |  |
| R8457 | C-R NET    | RM7LJ220X04                | 1 | 43484722004R2                  |  |
| R8459 | C-CARBON R | RN72K1J-472JE              | 1 | 435034724R1                    |  |
| R8460 | C-CARBON R | RN72K1J-681FE              | 1 | 435036812R1                    |  |
|       |            |                            |   |                                |  |

| R8462          | C-CARBON R            | RN72K1J-472JE              | 1 | 435034724R1                    |          |
|----------------|-----------------------|----------------------------|---|--------------------------------|----------|
| R8466          | C-R NET               | RM7LJ220X04                | 1 | 43484722004R2                  |          |
| R8467          | C-R NET               | RM7LJ220X04                | 1 | 43484722004R2                  |          |
| R8468          | C-R NET               | RM7LJ220X04                | 1 | 43484722004R2                  |          |
| R8469          | C-R NET               | RM7LJ220X04                | 1 | 43484722004R2                  |          |
| R8470          | C-R NET               | RM7LJ220X04                | 1 | 43484722004R2                  |          |
| R8471          | C-R NET               | RM7LJ220X04                | 1 | 43484722004R2                  |          |
| R8472          | C-R NET               | RM7LJ220X04                | 1 | 43484722004R2                  | <u> </u> |
| R8473          | C-R NET               | RM7LJ220X04                | 1 | 43484722004R2                  |          |
| R8474          | C-R NET               | RM7LJ220X04                | 1 | 43484722004R2                  |          |
| R8475          | C-CARBON R            | RN72K1J-220JE              | 1 | 435032204R1                    |          |
| R8479          | C-CARBON R            | RN72K1J-220JE              | 1 | 435032204R1                    |          |
| R8481          | C-CARBON R            | RN72K1J-472JE              | 1 | 435034724R1                    |          |
| R8482          | C-CARBON R            | RN72K1J-220JE              | 1 | 435032204R1                    |          |
| R8492          | C-CARBON R            | RN72K1J-102JE              | 1 | 435031024R1                    |          |
| R8493          | C-CARBON R            | RN72K1J-220JE              | 1 | 435032204R1                    |          |
| R8503          | C-R NET               | RM7LJ330X04                | 1 | 43484733004R2                  |          |
| R8504          | C-R NET               | RM7LJ330X04                | 1 | 43484733004R2                  |          |
| R8505          | C-R NET               | RM7LJ330X04                | 1 | 43484733004R2                  |          |
| R8506          | C-CARBON R            | RN72K1J-120JE              | 1 | 435031204R1                    |          |
| R8507          | C-R NET               | RM7LJ330X04                | 1 | 43484733004R2                  |          |
| R8508          | C-R NET               | RM7LJ330X04                | 1 | 43484733004R2<br>43484733004R2 |          |
| R8509          | C-R NET               | RM7LJ330X04<br>RM7LJ330X04 | 1 | 43484733004R2<br>43484733004R2 |          |
| R8510          | C-R NET               | RM7LJ330X04<br>RM7LJ330X04 | 1 | 43484733004R2<br>43484733004R2 |          |
| R8511          | C-R NET               | RM7LJ330X04                | 1 | 43484733004R2<br>43484733004R2 |          |
| R8512          | C-R NET               | RM7LJ330X04                | 1 | 43484733004R2<br>43484733004R2 |          |
| R8513          | C-R NET               | RM7LJ330X04<br>RM7LJ330X04 | 1 | 43484733004R2<br>43484733004R2 |          |
| R8514          | C-R NET<br>C-CARBON R |                            | 1 | 435034724R1                    |          |
| R8515          | C-CARBON R            | RN72K1J-472JE              | 1 | 435034724R1<br>435034724R1     |          |
|                |                       | RN72K1J-472JE              |   |                                |          |
| R8516          | C-CARBON R            | RN72K1J-101JE              | 1 | 435031014R1                    |          |
| R8517          | C-CARBON R            | RN72K1J-101JE              | 1 | 435031014R1                    |          |
| R8518          | C-CARBON R            | RN72K1J-472JE              | 1 | 435034724R1                    |          |
| R8519<br>R8520 | C-CARBON R            | RN72K1J-470JE              |   | 435034704R1                    |          |
|                | C-CARBON R            | RN72K1J-330JE              | 1 | 435033304R1                    |          |
| R8521          | C-R NET               | RM7LJ330X04                | 1 | 43484733004R2                  |          |
| R8522          | C-CARBON R            | RN72K1J-330JE              | 1 | 435033304R1                    |          |
| R8523          | C-CARBON R            | RN72K1J-330JE              | 1 | 435033304R1                    |          |
| R8524          | C-CARBON R            | RN72K1J-330JE              | 1 | 435033304R1                    |          |
| R8615          | C-CARBON R            | RN72K1J-332JE              | 1 | 435033324R1                    |          |
| R8616          | C-CARBON R            | RN72K1J-332JE              | 1 | 435033324R1                    |          |
| R8617          | C-CARBON R            | RN72K1J-332JE              | 1 | 435033324R1                    |          |
| R8618          | C-CARBON R            | RN72K1J-103JE              | 1 | 435031034R1                    |          |
| R8629          | C-CARBON R            | RN72K1J-473JE              | 1 | 435034734R1                    |          |
| R8630          | C-CARBON R            | RN72K1J-473JE              | 1 | 435034734R1                    |          |
| R8631          | C-CARBON R            | RN72K1J-473JE              | 1 | 435034734R1                    |          |
| R8632          | C-CARBON R            | RN72K1J-473JE              | 1 | 435034734R1                    |          |
| R8633          | C-CARBON R            | RN72K1J-102JE              | 1 | 435031024R1                    |          |
| R8662          | C-CARBON R            | RN72K1J-105JE              | 1 | 435031054R1                    |          |
|                |                       |                            |   |                                |          |

| D0662 | CCAPPONE   | DNZOVIL SCIE    |   | 425025 c1 4D1 |
|-------|------------|-----------------|---|---------------|
| R8663 | C-CARBON R | RN72K1J-561JE   | 1 | 435035614R1   |
| R8701 | C-CARBON R | RN72K1J-472JE   | 1 | 435034724R1   |
| R8703 | C-CARBON R | RN72K1J-472JE   | 1 | 435034724R1   |
| R8706 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8707 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8708 | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1   |
| R8710 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8711 | C-CARBON R | RN72K1J-222JE   | 1 | 435032224R1   |
| R8712 | C-CARBON R | RN72K1J-222JE   | 1 | 435032224R1   |
| R8713 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8714 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8715 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8716 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8717 | C-CARBON R | RN72K1J-330JE   | 1 | 435033304R1   |
| R8718 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8719 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8720 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8721 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8722 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8723 | C-R NET    | RM7LJ222X04     | 1 | 43484722204R2 |
| R8726 | C-R NET    | RM7LJ222X04     | 1 | 43484722204R2 |
| R8727 | C-R NET    | RM7LJ103X04     | 1 | 43484710304R2 |
| R8728 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8729 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8730 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8732 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8733 | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1   |
| R8734 | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1   |
| R8735 | C-CARBON R | RN72K1J-472JE   | 1 | 435034724R1   |
| R8736 | C-R NET    | RM7LJ220X04     | 1 | 43484722004R2 |
| R8737 | C-CARBON R | RN72K1J-472JE   | 1 | 435034724R1   |
| R8738 | C-CARBON R | RN72K1J-473JE   | 1 | 435034734R1   |
| R8741 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8744 | C-CARBON R | RN72K1J-472JE   | 1 | 435034724R1   |
| R8745 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8746 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8747 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8748 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8749 | C-R NET    | RM7LJ220X04     | 1 | 43484722004R2 |
| R8750 | C-R NET    | RM7LJ103X04     | 1 | 43484710304R2 |
| R8751 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8752 | C-R NET    | RM7LJ220X04     | 1 | 43484722004R2 |
| R8753 | C-R NET    | RM7LJ220X04     | 1 | 43484722004R2 |
| R8758 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8759 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8760 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| R8761 | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1   |
| R8762 | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1   |
| 20102 | - CIMBOIT  | ACTIVATED TOOSE | 1 | .5555135111   |

| R8763 | C-R NET    | RM7LJ103X04                    | 1 | 43484710304R2                  |  |
|-------|------------|--------------------------------|---|--------------------------------|--|
| R8765 | C-CARBON R | RN72K1J-103JE                  | 1 | 435031034R1                    |  |
| R8766 | C-R NET    | RN72K13-103JE<br>RM7LJ103X04   | 1 | 43484710304R2                  |  |
| R8769 | C-R NET    | RM7LJ103X04<br>RM7LJ103X04     | 1 | 43484710304R2<br>43484710304R2 |  |
| R8770 | C-R NET    | RM7LJ103X04                    | 1 | 43484710304R2<br>43484710304R2 |  |
|       |            |                                |   |                                |  |
| R8800 | C-CARBON R | RN72K1J-561JE                  | 1 | 435035614R1                    |  |
| R8801 | C-CARBON R | RN72K11-000JE                  | 1 | 435030004R1                    |  |
| R8802 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                    |  |
| R8803 | EMIFIL     | BK1608HS601-T                  | 1 | 230984R1                       |  |
| R8804 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                    |  |
| R8805 | EMIFIL     | BK1608HS601-T                  | 1 | 230984R1                       |  |
| R8806 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                    |  |
| R8807 | C-CARBON R | RN72K1J-560JE                  | 1 | 435035604R1                    |  |
| R8808 | C-CARBON R | RN72K1J-104JE                  | 1 | 435031044R1                    |  |
| R8809 | C-CARBON R | RN72K1J-560JE                  | 1 | 435035604R1                    |  |
| R8810 | C-CARBON R | RN72K1J-104JE                  | 1 | 435031044R1                    |  |
| R8811 | C-CARBON R | RN72K1J-560JE                  | 1 | 435035604R1                    |  |
| R8812 | C-CARBON R | RN72K1J-104JE                  | 1 | 435031044R1                    |  |
| R8813 | C-CARBON R | RN72K1J-272FE                  | 1 | 435032722R1                    |  |
| R8814 | C-CARBON R | RN72K1J-102JE                  | 1 | 435031024R1                    |  |
| R8815 | C-CARBON R | RN72K1J-272FE                  | 1 | 435032722R1                    |  |
| R8816 | C-CARBON R | RN72K1J-472JE                  | 1 | 435034724R1                    |  |
| R8817 | C-CARBON R | RN72K1J-472JE                  | 1 | 435034724R1                    |  |
| R8819 | C-CARBON R | RN72K1J-472JE                  | 1 | 435034724R1                    |  |
| R8820 | C-CARBON R | RN72K1J-333JE                  | 1 | 435033334R1                    |  |
| R8821 | C-CARBON R | RN72K1J-182JE                  | 1 | 435031824R1                    |  |
| R8823 | C-R NET    | RM7LJ220X04                    | 1 | 43484722004R2                  |  |
| R8824 | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                    |  |
| R8825 | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                    |  |
| R8826 | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                    |  |
| R8827 | C-CARBON R | RN72K1J-105JE                  | 1 | 435031054R1                    |  |
| R8828 | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                    |  |
| R8830 | C-R NET    | RM7LJ220X04                    | 1 | 43484722004R2                  |  |
| R8831 | C-R NET    | RM7LJ220X04                    | 1 | 43484722004R2                  |  |
| R8833 | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                    |  |
| R8834 | C-R NET    | RM7LJ220X04                    | 1 | 43484722004R2                  |  |
| R8835 | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                    |  |
| R8836 | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                    |  |
| R8837 | C-R NET    | RM7LJ220X04                    | 1 | 43484722004R2                  |  |
| R8838 | C-R NET    | RM7LJ220X04                    | 1 | 43484722004R2                  |  |
| R8839 | C-R NET    | RM7LJ220X04                    | 1 | 43484722004R2                  |  |
| R8840 | C-R NET    | RM7LJ220X04                    | 1 | 43484722004R2                  |  |
| R8841 | C-R NET    | RM7LJ220X04                    | 1 | 43484722004R2                  |  |
| R8842 | C-CARBON R | RN72K1J-220JE                  | 1 | 435032204R1                    |  |
| R8843 | C-CARBON R | RN72K1J-220JE<br>RN72K1J-000JE | 1 | 435030004R1                    |  |
| R8844 | C-CARBON R | RN72K1J-000JE<br>RN72K1J-180JE | 1 | 435030004R1<br>435031804R1     |  |
|       |            |                                |   |                                |  |
| R8845 | C-CARBON R | RN72K1J-000JE                  | 1 | 435030004R1                    |  |
| R8846 | C-CARBON R | RN72K1J-180JE                  | 1 | 435031804R1                    |  |

| D8847 | C CAPRON P | DN72K11 0001E                  | 1   | 435030004R1                |   |
|-------|------------|--------------------------------|-----|----------------------------|---|
| R8847 | C-CARBON R | RN72K1J-000JE                  | 1   |                            | *************************************** |
| R8848 | C-CARBON R | RN72K1J-680JE                  | 1   | 435036804R1                |   |
| R8849 | C-CARBON R | RN72K1J-180JE                  | 1   | 435031804R1                |   |
| R8850 | C-CARBON R | RN72K1J-222JE                  | 1   | 435032224R1                |   |
| R8851 | C-CARBON R | RN72K1J-331JE                  | 1   | 435033314R1                |   |
| R8852 | C-CARBON R | RN72K1J-331JE                  | 1   | 435033314R1                |   |
| R8853 | C-CARBON R | RN72K1J-331JE                  | 1   | 435033314R1                |   |
| R8854 | C-CARBON R | RN72K1J-332JE                  | 1   | 435033324R1                |   |
| R8855 | C-CARBON R | RN72K1J-332JE                  | 1   | 435033324R1                |   |
| R8856 | C-CARBON R | RN72K1J-332JE                  | . 1 | 435033324R1                |   |
| R8857 | C-CARBON R | RN72K1J-105JE                  | 1   | 435031054R1                |   |
| R8858 | C-CARBON R | RN72K1J-000JE                  | 1   | 435030004R1                |   |
| R8860 | C-CARBON R | RN72K1J-220JE                  | 1   | 435032204R1                |   |
| R8861 | C-CARBON R | RN72K1J-220JE                  | 1   | 435032204R1                |   |
| R8862 | C-CARBON R | RN72K1J-220JE                  | 1   | 435032204R1                |   |
| R8863 | C-CARBON R | RN72K1J-750FE                  | 1   | 435037502R1                |   |
| R8864 | C-CARBON R | RN72K1J-750FE                  | 1   | 435037502R1                |   |
| R8865 | C-CARBON R | RN72K1J-750FE                  | 1   | 435037502R1                |   |
| R8869 | C-CARBON R | RN72K1J-750FE                  | 1   | 435037502R1                |   |
| R8870 | C-CARBON R | RN72K1J-750FE                  | 1   | 435037502R1                |   |
| R8871 | C-CARBON R | RN72K1J-750FE                  | 1   | 435037502R1                |   |
| R8872 | C-CARBON R | RN72K1J-471FE                  | 1   | 435034712R1                |   |
| R8873 | C-CARBON R | RN72K1J-471FE                  | 1   | 435034712R1                |   |
| R8874 | C-CARBON R | RN72K1J-471FE                  | 1   | 435034712R1                |   |
| R8879 | C-CARBON R | RN72K1J-471FE                  | 1   | 435034712R1                |   |
| R8880 | C-CARBON R | RN72K1J-471FE                  | 1   | 435034712R1                |   |
| R8881 | C-CARBON R | RN72K1J-471FE                  | 1   | 435034712R1                |   |
| R8882 | C-CARBON R | RN72K1J-000JE                  | 1   | 435030004R1                |   |
| R8883 | C-CARBON R | RN72K1J-000JE                  | 1   | 435030004R1                |   |
| R8890 | C-CARBON R | RN72K1J-000JE                  | 1   | 435030004R1                |   |
| R8891 | C-CARBON R | RN72K1J-000JE<br>RN72K1J-104JE | 1   | 435031044R1                |   |
| R8892 | C-CARBON R | RN72K1J-104JE<br>RN72K1J-104JE | 1   | 435031044R1                |   |
| R8893 | C-CARBON R |                                | 1   | 435031034R1                |   |
| R8901 |            | RN72K1J-103JE                  | 1   | 435031034R1<br>435031034R1 |   |
|       | C-CARBON R | RN72K1J-103JE                  |     |                            |   |
| R8905 | C-CARBON R | RN72K1J-470JE                  | 1   | 435034704R1                |   |
| R8906 | C-CARBON R | RN72K1J-470JE                  | 1   | 435034704R1                |   |
| R8907 | C-CARBON R | RN72K1J-470JE                  | 1   | 435034704R1                |   |
| R8908 | C-CARBON R | RN72K1J-681FE                  | 1   | 435036812R1                |   |
| R8909 | C-CARBON R | RN72K1J-681FE                  | 1   | 435036812R1                |   |
| R8910 | C-CARBON R | RN72K1J-681FE                  | 1   | 435036812R1                |   |
| R8911 | C-CARBON R | RN72K1J-272FE                  | 1   | 435032722R1                |   |
| R8912 | C-CARBON R | RN72K1J-272FE                  | 1   | 435032722R1                |   |
| R8913 | C-CARBON R | RN72K1J-681FE                  | 1   | 435036812R1                |   |
| R8914 | C-CARBON R | RN72K1J-681FE                  | 1   | 435036812R1                |   |
| R8915 | C-CARBON R | RN72K1J-470JE                  | 1   | 435034704R1                |   |
| R8917 | C-CARBON R | RN72K1J-470JE                  | 1   | 435034704R1                |   |
| R8919 | C-CARBON R | RN72K1J-470JE                  | 1   | 435034704R1                |   |
| R8920 | C-CARBON R | RN72K1J-470JE                  | 1   | 435034704R1                |   |
|       |            |                                |     |                            |   |

| D8021  | C-R NET    | PM71 1470V04  | 1 | 43484747004R2 |   |
|--------|------------|---------------|---|---------------|---|
| R8921  |            | RM7LJ470X04   | 1 |               |   |
| R8922  | C-R NET    | RM7LJ470X04   | 1 | 43484747004R2 |   |
| R8923  | C-R NET    | RM7LJ470X04   | 1 | 43484747004R2 |   |
| R8924  | C-R NET    | RM7LJ470X04   | 1 | 43484747004R2 |   |
| R8925  | C-R NET    | RM7LJ470X04   | 1 | 43484747004R2 |   |
| R8926  | C-R NET    | RM7LJ470X04   | 1 | 43484747004R2 |   |
| R8927  | C-R NET    | RM7LJ470X04   | 1 | 43484747004R2 |   |
| R8928  | C-R NET    | RM7LJ470X04   | 1 | 43484747004R2 |   |
| R8929  | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |   |
| R8930  | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |   |
| R8931  | C-CARBON R | RN72K1J-151FE | 1 | 435031512R1   |   |
| R8932  | C-CARBON R | RN72K1J-151FE | 1 | 435031512R1   |   |
| R8933  | C-CARBON R | RN72K1J-151FE | 1 | 435031512R1   |   |
| R8934  | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1   |   |
| R8935  | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1   |   |
| R8936  | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1   |   |
| R8937  | C-R NET    | RM7LJ473X04   | 1 | 43484747304R2 |   |
| R8938  | C-R NET    | RM7LJ473X04   | 1 | 43484747304R2 |   |
| R8939  | C-R NET    | RM7LJ473X04   | 1 | 43484747304R2 |   |
| R8940  | C-R NET    | RM7LJ473X04   | 1 | 43484747304R2 |   |
| R8941  | C-R NET    | RM7LJ222X04   | 1 | 43484722204R2 |   |
| R8942  | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |   |
| R8951  | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |   |
| R8952  | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |   |
| R8953  | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |   |
| R8954  | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |   |
| R8955  | C-CARBON R | RN72K1J-121JE | 1 | 435031214R1   |   |
| R8956  | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1   |   |
| R8957  | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1   |   |
| R8958  | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1   |   |
| R8959  | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |   |
| R8960  | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |   |
| R8961  | C-CARBON R | RN72K1J-471FE | 1 | 435034712R1   |   |
| R8962  | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |   |
| R8964  | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1   |   |
| R8965  | C-CARBON R | RN72K1J-392JE | 1 | 435033924R1   |   |
| R8966  | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1   |   |
| R8967  | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |   |
| R8968  | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |   |
| R8970  | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   | *************************************** |
| RN8013 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |   |
| RN8014 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |   |
| RN8015 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |   |
| RN8016 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |   |
| RN8017 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |   |
| RN8018 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |   |
| RN8019 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |   |
| RN8020 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |   |
|        |            |               |   |               |   |

| D.1005: | C D VIEW | D) (47 Y000270 ) |   | 10.10.150000 : |  |
|---------|----------|------------------|---|----------------|--|
| RN8021  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8022  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8023  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8024  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8025  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8026  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8027  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8028  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8029  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8030  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8037  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8038  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8039  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8041  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8043  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8045  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8048  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8049  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8050  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8051  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8052  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8053  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8054  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8055  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8056  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8057  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8058  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8059  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8060  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8061  | C-R NET  | RM7LJ330X04      | 1 | 43484733004R2  |  |
| RN8062  | C-R NET  | RM7LJ680X04      | 1 | 43484768004R2  |  |
| RN8063  | C-R NET  | RM7LJ470X04      | 1 | 43484747004R2  |  |
| RN8064  | C-R NET  | RM7LJ680X04      | 1 | 43484768004R2  |  |
| RN8065  | C-R NET  | RM7LJ470X04      | 1 | 43484747004R2  |  |
| RN8066  | C-R NET  | RM7LJ680X04      | 1 | 43484768004R2  |  |
| RN8067  | C-R NET  | RM7LJ470X04      | 1 | 43484747004R2  |  |
| RN8068  | C-R NET  | RM7LJ680X04      | 1 | 43484768004R2  |  |
| RN8069  | C-R NET  | RM7LJ470X04      | 1 | 43484747004R2  |  |
| RN8070  | C-R NET  | RM7LJ680X04      | 1 | 43484768004R2  |  |
| RN8071  | C-R NET  | RM7LJ680X04      | 1 | 43484768004R2  |  |
| RN8072  | C-R NET  | RM7LJ470X04      | 1 | 43484747004R2  |  |
| RN8073  | C-R NET  | RM7LJ680X04      | 1 | 43484768004R2  |  |
| RN8074  | C-R NET  | RM7LJ470X04      | 1 | 43484747004R2  |  |
| RN8075  | C-R NET  | RM7LJ680X04      | 1 | 43484768004R2  |  |
| RN8076  | C-R NET  | RM7LJ680X04      | 1 | 43484768004R2  |  |
| RN8077  | C-R NET  | RM7LJ680X04      | 1 | 43484768004R2  |  |
| RN8078  | C-R NET  | RM7LJ680X04      | 1 | 43484768004R2  |  |
| RN8079  | C-R NET  | RM7LJ680X04      | 1 | 43484768004R2  |  |
|         |          |                  |   |                |  |

| RN8080  | C-R NET   | RM7LJ680X04    | 1 | 43484768004R2 |
|---------|-----------|----------------|---|---------------|
| RN8081  | C-R NET   | RM7LJ680X04    | 1 | 43484768004R2 |
| RN8082  | C-R NET   | RM7LJ680X04    | 1 | 43484768004R2 |
| RN8083  | C-R NET   | RM7LJ680X04    | 1 | 43484768004R2 |
| RN8087  | C-R NET   | RM7LJ103X04    | 1 | 43484710304R2 |
| RN8088  | C-R NET   | RM7LJ103X04    | 1 | 43484710304R2 |
| RN8089  | C-R NET   | RM7LJ000X04    | 1 | 43484700004R2 |
| RN8091  | C-R NET   | RM7LJ000X04    | 1 | 43484700004R2 |
| RN8093  | C-R NET   | RM7LJ000X04    | 1 | 43484700004R2 |
| RN8095  | C-R NET   | RM7LJ000X04    | 1 | 43484700004R2 |
| RN8097  | C-R NET   | RM7LJ000X04    | 1 | 43484700004R2 |
| RN8099  | C-R NET   | RM7LJ000X04    | 1 | 43484700004R2 |
| RN8703  | C-R NET   | RM7LJ680X04    | 1 | 43484768004R2 |
| RN8704  | C-R NET   | RM7LJ680X04    | 1 | 43484768004R2 |
| RN8705  | C-R NET   | RM7LJ680X04    | 1 | 43484768004R2 |
| RN8706  | C-R NET   | RM7LJ680X04    | 1 | 43484768004R2 |
| JL8002B | WIRE TRAP | NPLG-5P588     | 1 | 25055626      |
| P2801B  | SOCKET    | NSCT-31P2124   | 1 | 25052227      |
| P3805B  | SOCKET    | NSCT-10P1025   | 1 | 25051235      |
| P8001   | SOCKET    | YKF45-7037V    | 1 | 25053253R3    |
| P8002   | SOCKET    | YKF45-7037V    | 1 | 25053253R3    |
| P8002A  | SOCKET    | NSCT-15P1030   | 1 | 25051240      |
| P8051   | SOCKET    | YKF45-7037V    | 1 | 25053253R3    |
| P8052   | SOCKET    | YKF45-7037V    | 1 | 25053253R3    |
| P8099   | WS CLAMP  | CB-71683(L=50) | 1 | 260261        |
| P8302   | SOCKET    | YKF45-7037V    | 1 | 25053253R3    |
| P8352   | SOCKET    | YKF45-7037V    | 1 | 25053253R3    |
| P8702   | SOCKET    | NSCT-8P2471    | 1 | 25052574R2    |
| P8704   | SOCKET    | NSCT-8P2471    | 1 | 25052574R2    |
|         |           |                |   |               |

# HD RADIO PC BOARD (NARF-9118-1A)

| REF. NO. | PART NAME  | DESCRIPTION         | Q'TY | PART NO. (SN) | REMARKS |
|----------|------------|---------------------|------|---------------|---------|
| U1       | FRONTEND   | HD RADIO MODULE     | 1    | 240160        |         |
| Q1       | IC         | TA48018AF(TE16L_NQ) | 1    | 22278018DR2TO |         |
| Q1 or    | IC         | BA18BC0FP           | (1)  | 22278018DR2RH |         |
| Q3       | IC         | NJM2903V            | 1    | 22241675R2    |         |
| Q4       | IC         | CS4344-CZZR         | 1    | 22242406R2    |         |
| Q6       | IC         | BA50BC0FP           | 1    | 22278005DR2RH |         |
| Q7       | IC         | BA33BC0FP           | 1    | 22278033DR2RH |         |
| Q8       | IC         | BD7820              | 1    | 22242300R2    |         |
| Q9       | IC         | NE5532APSR          | 1    | 22242283R2    |         |
| Q10      | IC         | NE5532APSR          | 1    | 22242283R2    |         |
| Q11      | IC         | XC6213B332MR        | 1    | 22242277R2    |         |
| L2       | EMIFIL     | BK1608LM182-T       | 1    | 230958R1      |         |
| L3       | EMIFIL     | BK1608LM182-T       | 1    | 230958R1      |         |
| L4       | CHOKE COIL | NCH-1471            | 1    | 231237K022R2  |         |
| C1       | VR C       | CE04W10V-470M(VR)   | 1    | 394634717T    |         |

| C2  | VR C       | CE04W10V-470M(VR)  | 1 | 394634717T  |
|-----|------------|--------------------|---|-------------|
| C3  | C-CERA C   | CK725F1H-104Z1     | 1 | 332151040R1 |
| C4  | UTSP C     | CE04W50V-10M(UTSP) | 1 | 397581007T  |
| C7  | VR C       | CE04W10V-470M(VR)  | 1 | 394634717T  |
| C8  | C-CERA C   | CK725F1H-104Z1     | 1 | 332151040R1 |
| C9  | UTSP C     | CE04W50V-10M(UTSP) | 1 | 397581007T  |
| C10 | C-CERA C   | CK725F1H-224Z1     | 1 | 332152240R1 |
| C11 | C-CERA C   | CK725F1H-104Z1     | 1 | 332151040R1 |
| C12 | VR C       | CE04W10V-470M(VR)  | 1 | 394634717T  |
| C13 | C-CERA C   | CK725F1H-104Z1     | 1 | 332151040R1 |
| C14 | VR C       | CE04W10V-470M(VR)  | 1 | 394634717T  |
| C15 | C-CERA C   | CK725F1H-104Z1     | 1 | 332151040R1 |
| C16 | C-CERA C   | CK725F1H-104Z1     | 1 | 332151040R1 |
| C17 | C-CERA C   | CK725F1H-104Z1     | 1 | 332151040R1 |
| C18 | VR C       | CE04W16V-100M(VR)  | 1 | 394641017T  |
| C19 | UTSP C     | CE04W50V-10M(UTSP) | 1 | 397581007T  |
| C20 | C-CERA C   | CK732B1A-105K      | 1 | 337361057F2 |
| C22 | C-CERA C   | CC725CH1H-102J1    | 1 | 342101024R1 |
| C23 | C-CERA C   | CC725CH1H-102J1    | 1 | 342101024R1 |
| C24 | C-CERA C   | CC725CH1H-102J1    | 1 | 342101024R1 |
| C25 | C-CERA C   | CC725CH1H-102J1    | 1 | 342101024R1 |
| C26 | UTSP C     | CE04W50V-10M(UTSP) | 1 | 397581007T  |
| C27 | UTSP C     | CE04W50V-10M(UTSP) | 1 | 397581007T  |
| R1  | C-CARBON R | RN72K1J-822JE      | 1 | 435038224R1 |
| R2  | C-CARBON R | RN72K1J-101JE      | 1 | 435031014R1 |
| R3  | C-CARBON R | RN72K1J-105JE      | 1 | 435031054R1 |
| R4  | C-CARBON R | RN72K1J-101JE      | 1 | 435031014R1 |
| R5  | TRIM R     | N06HR2KBB          | 1 | 5211402T    |
| R6  | C-CARBON R | RN72K1J-103JE      | 1 | 435031034R1 |
| R7  | C-CARBON R | RN72K1J-101JE      | 1 | 435031014R1 |
| R8  | C-CARBON R | RN72K1J-101JE      | 1 | 435031014R1 |
| R10 | C-CARBON R | RN72K1J-000JE      | 1 | 435030004R1 |
| R11 | C-CARBON R | RN72K1J-222JE      | 1 | 435032224R1 |
| R12 | C-CARBON R | RN72K1J-222JE      | 1 | 435032224R1 |
| R13 | TRIM R     | N06HR2KBB          | 1 | 5211402T    |
| R14 | C-CARBON R | RN72K1J-103JE      | 1 | 435031034R1 |
| R15 | C-CARBON R | RN72K1J-470JE      | 1 | 435034704R1 |
| R16 | C-CARBON R | RN72K1J-472JE      | 1 | 435034724R1 |
| R17 | C-CARBON R | RN72K1J-472JE      | 1 | 435034724R1 |
| R18 | C-CARBON R | RN72K1J-000JE      | 1 | 435030004R1 |
| R19 | C-CARBON R | RN72K1J-470JE      | 1 | 435034704R1 |
| R20 | C-CARBON R | RN72K1J-105JE      | 1 | 435031054R1 |
| R21 | C-CARBON R | RN72K1J-682JE      | 1 | 435036824R1 |
| R22 | C-CARBON R | RN72K1J-471JE      | 1 | 435034714R1 |
| R23 | C-CARBON R | RN72K1J-470JE      | 1 | 435034704R1 |
| R24 | C-CARBON R | RN72K1J-470JE      | 1 | 435034704R1 |
| R25 | C-CARBON R | RN72K1J-000JE      | 1 | 435030004R1 |
| R26 | C-CARBON R | RN72K1J-000JE      | 1 | 435030004R1 |
|     |            |                    |   |             |

| R27   | C-CARBON R | RN72K1J-273JE   | 1 | 435032734R1 |  |
|-------|------------|-----------------|---|-------------|--|
| R28   | C-CARBON R | RN72K1J-393JE   | 1 | 435033934R1 | the state of the s |
| R29   | C-CARBON R | RN72K1J-273JE   | 1 | 435032734R1 |  |
| R30   | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1 |  |
| R31   | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1 |  |
| R33   | C-CARBON R | RN72K1J-220JE   | 1 | 435032204R1 |  |
| R34   | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1 |  |
| R35   | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1 |  |
| R38   | C-CARBON R | RN72K1J-222JE   | 1 | 435032224R1 |  |
| R39   | C-CARBON R | RN72K1J-222JE   | 1 | 435032224R1 |  |
| R40   | C-CARBON R | RN72K1J-222JE   | 1 | 435032224R1 |  |
| R41   | C-CARBON R | RN72K1J-222JE   | 1 | 435032224R1 |  |
| R42   | C-CARBON R | RN72K1J-104JE   | 1 | 435031044R1 |  |
| R43   | C-CARBON R | RN72K1J-104JE   | 1 | 435031044R1 |  |
| R44   | C-CARBON R | RN72K1J-122JE   | 1 | 435031224R1 |  |
| R45   | C-CARBON R | RN72K1J-122JE   | 1 | 435031224R1 |  |
| R46   | C-CARBON R | RN72K1J-332JE   | 1 | 435033324R1 |  |
| R47   | C-CARBON R | RN72K1J-332JE   | 1 | 435033324R1 |  |
| R48   | C-CARBON R | RN72K1J-822JE   | 1 | 435038224R1 |  |
| R49   | C-CARBON R | RN72K1J-822JE   | 1 | 435038224R1 |  |
| R50   | C-CARBON R | RN72K1J-682JE   | 1 | 435036824R1 |  |
| R51   | C-CARBON R | RN72K1J-682JE   | 1 | 435036824R1 |  |
| R52   | METAL O R  | RS1/2WBJ-10     | 1 | 443521004T  |  |
| R53   | METAL R    | RNU1WCJ-1       | 1 | 453630104T  |  |
| R54   | METAL R    | RNU1WCJ-1       | 1 | 453630104T  |  |
| A3    | TAPE       | TAPE(CLOTH-16U) | 1 | 29110083    |  |
| P1    | TRM        | NTM-4PDML401    | 1 | 25060473    |  |
| P101A | SOCKET     | NSCT-13P2106    | 1 | 25052209    |  |
| P5    | PLUG       | NPLG-4P118      | 1 | 25055134    |  |

# U44 LAN PC BOARD (NALAN-9121-1A)

| REF. NO. | PART NAME          | DESCRIPTION          | Q'TY | PART NO. (SN)   | REMARKS |
|----------|--------------------|----------------------|------|-----------------|---------|
| Q200     | IC                 | R5S70900BGV          | 1    | 22242460R3      |         |
| Q201     | IC                 | IS24C04A-2ZLI        | 1    | 22242456R2      |         |
| Q202     | IC                 | NE5532APSR           | 1    | 22242283R2      |         |
| Q203     | IC                 | NE5532APSR           | 1    | 22242283R2      |         |
| Q204     | IC                 | CS4344-CZZR          | 1    | 22242406R2      |         |
| Q205     | IC                 | S-817A33ANB-CUWT2G   | 1    | 22242451R2      |         |
| Q206     | IC                 | ENVY24MT-G           | 1    | 22242233R3      |         |
| Q207     | IC                 | IS24C04A-2ZLI        | 1    | 22242456R2      |         |
| Q208     | IC                 | R1232D121B-TR-F      | 1    | 22242431R2      |         |
| Q209     | IC                 | M93C46-WDW6TP        | 1    | 22242430R2      |         |
| Q210     | TR                 | 2SB1197K-Q           | 1    | 2217353R2       |         |
| Q210 or  | TR                 | 2SB1197K-R           | (1)  | 2217354R2       |         |
| Q211     | IC                 | RTL8100CL-LF         | 1    | 22242432R3      |         |
| Q212     | IC(NETWORK MEMORY) | M29W128FL70N6E(0268) | 1    | 222W0073R302684 |         |
| Q213     | IC                 | K4M563233G-HN75      | 1    |                 | NRP     |

| Q213 or | IC           | IS42S32800B-7BL     | (1) |              | NRP |
|---------|--------------|---------------------|-----|--------------|-----|
| Q214    | IC           | K4M563233G-HN75     | 1   |              | NRP |
| Q214 or | IC           | IS42S32800B-7BL     | (1) |              | NRP |
| Q215    | IC           | CDCVF2505PWR        | 1   | 22242426R2   |     |
| Q216    | IC           | CY22393FXCT-01      | 1   | 22242427R2   |     |
| L200    | EMIFIL       | BLM15PG100SN1       | 1   | 230995R1     |     |
| L201    | EMIFIL       | BLM15PG100SN1       | 1   | 230995R1     |     |
| L202    | EMIFIL       | BLM15AG601SN1       | 1   | 230994R1     |     |
| L203    | EMIFIL       | BLM15AG601SN1       | 1   | 230994R1     |     |
| L204    | EMIFIL       | BLM15AG601SN1       | 1   | 230994R1     |     |
| L205    | EMIFIL       | BLM15AG102SN1       | 1   | 230993R1     |     |
| L206    | CHOKE COIL   | CDRH4D28-4R7NC      | 1   | 231376P047R2 |     |
| L207    | EMIFIL       | BLM15PG100SN1       | 1   | 230995R1     |     |
| L208    | EMIFIL       | BLM15AG102SN1       | 1   | 230993R1     |     |
| L209    | EMIFIL       | BLM15AG102SN1       | 1   | 230993R1     |     |
| L210    | EMIFIL       | BLM15AG102SN1       | 1   | 230993R1     |     |
| L211    | EMIFIL       | BLM15AG102SN1       | 1   | 230993R1     |     |
| L212    | EMIFIL       | BLM15AG102SN1       | 1   | 230993R1     |     |
| L213    | EMIFIL       | BLM15PG100SN1       | 1   | 230995R1     |     |
| L214    | EMIFIL       | BLM15PG100SN1       | 1   | 230995R1     |     |
| L215    | EMIFIL       | BLM15PG100SN1       | 1   | 230995R1     |     |
| L216    | EMIFIL       | BLM15PG100SN1       | 1   | 230995R1     |     |
| L217    | EMIFIL       | BLM15PG100SN1       | 1   | 230995R1     |     |
| X200    | CRYSTAL      | FCX03-22.579MHz     | 1   | 3010390R2    |     |
| X201    | CRYSTAL      | FCX-03 49.152M15PPM | 1   | 3010403R2    |     |
| X202    | CRYSTAL      | FCX-03 50PPM(25MHz) | 1   | 3010387R2    |     |
| X203    | CRYSTAL      | FCX-03-27MHz        | 1   | 3010353R2    |     |
| C200    | CHIP TANTAL  | TCSCS1C106MAAR      | 1   | 396541007R2  |     |
| C201    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C202    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C203    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C205    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C206    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C207    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C208    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C209    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C210    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C211    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C212    | C-CERA C     | CC725CH1H-080D0     | 1   | 342030802R1  |     |
| C213    | C-CERA C     | CC725CH1H-080D0     | 1   | 342030802R1  |     |
| C214    | C-CERA C     | CC725CH1H-050C0     | 1   | 342030501R1  |     |
| C215    | C-CERA C     | CC725CH1H-050C0     | 1   | 342030501R1  |     |
| C216    | CHIP TANTAL  | TCSCS1C106MAAR      | 1   | 396541007R2  |     |
| C218    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C219    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C221    | C-CERA C     | CK725B1C-104K0      | 1   | 332011045R1  |     |
| C222    | CHIP ELECT C | CEWX16V-10M         | 1   | 398141007R2  |     |
| C223    | C-CERA C     | CC725CH1E-821J0     | 1   | 342028214R1  |     |

| C224         | C-CERA C             | CC725CH1E-821J0                  | 1 | 342028214R1                |
|--------------|----------------------|----------------------------------|---|----------------------------|
| C225         | CHIP ELECT C         | CEWX16V-10M                      | 1 | 398141007R2                |
| C226         | C-CERA C             | CC725CH1E-821J0                  | 1 | 342028214R1                |
| C227         | C-CERA C             | CC725CH1E-821J0                  | 1 | 342028214R1                |
| C228         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C229         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C230         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C231         | CHIP ELECT C         | CEWX16V-100M                     | 1 | 398141017R2                |
| C232         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C233         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C234         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C235         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C236         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C237         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C238         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C239         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C240         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C241         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C242         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C243         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C244         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C245         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C246         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C247         | C-CERA C             | CK725B0J-106K                    | 1 | 332091065R2                |
| C248         | C-CERA C             | CK725B0J-106K                    | 1 | 332091065R2                |
| C255         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C256         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C257         | C-CERA C             | CC725CH1H-050C0                  | 1 | 342030501R1                |
| C258         | C-CERA C             | CC725CH1H-050C0                  | 1 | 342030501R1                |
| C259         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C260         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C261         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C263         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C264         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C265         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C266         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C267         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C268         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C269         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C270         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C271         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C272         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C273         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C274         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C275         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C276         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C277         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C278         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C276<br>C277 | C-CERA C<br>C-CERA C | CK725B1C-104K0<br>CK725B1C-104K0 | 1 | 332011045R1<br>332011045R1 |

|      | G GPD : ~ | CYTEACD ( ~ 10 VV) |   | 222011015D1 |
|------|-----------|--------------------|---|-------------|
| C279 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C280 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C281 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C282 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C283 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C284 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C285 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C286 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C287 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C288 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C289 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C290 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C291 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C292 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C293 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C294 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C295 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C296 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C297 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C298 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C299 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C300 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C301 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C302 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C303 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C304 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C305 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C306 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C307 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C308 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C309 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C310 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C311 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C312 | C-CERA C  | CK725B0J-106K      | 1 | 332091065R2 |
| C313 | C-CERA C  | CK725B1C-104K0     | 1 | 332011045R1 |
| C314 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C315 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C316 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C317 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C318 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C319 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C320 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C321 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C322 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C323 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C324 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C325 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
| C326 | C-CERA C  | CC725CH1H-102J0    | 1 | 342021024R1 |
|      |           |                    |   |             |

| C327         | C-CERA C                 | CC725CH1H-102J0               | 1 | 342021024R1                |
|--------------|--------------------------|-------------------------------|---|----------------------------|
| C328         | C-CERA C                 | CC725CH1H-102J0               | 1 | 342021024R1<br>342021024R1 |
| C329         | C-CERA C                 | CC725CH1H-102J0               | 1 | 342021024R1<br>342021024R1 |
| C330         | C-CERA C                 | CK725B0J-106K                 | 1 | 332091065R2                |
| C331         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C332         | CHIP TANTAL              | TCSCS1C106MAAR                | 1 | 396541007R2                |
| C333         | CHIP TANTAL  CHIP TANTAL | TCSCS1C100MAAR TCSCS1C106MAAR | 1 | 396541007R2                |
| C334         | C-CERA C                 | CK725B0J-106K                 | 1 | 332091065R2                |
| C335         | C-CERA C                 | CK725B0J-106K                 | 1 | 332091005R2<br>332091065R2 |
| C340         | CHIP TANTAL              | TCSCS1C106MAAR                | 1 | 396541007R2                |
| C340         | CHIP TANTAL  CHIP TANTAL | TCSCS1C100MAAR TCSCS1C106MAAR | 1 | 396541007R2                |
| C341         | C-CERA C                 | CK725B0J-106K                 | 1 | 332091065R2                |
| C342<br>C343 | C-CERA C                 | CK725B0J-106K                 | 1 |                            |
|              |                          |                               |   | 332091065R2                |
| C350         | C-CERA C                 | CC725CH1H-102J0               | 1 | 342021024R1                |
| C351         | C-CERA C                 | CC725CH1H-102J0               |   | 342021024R1                |
| C352         | C-CERA C                 | CC725CH1H-102J0               | 1 | 342021024R1                |
| C353         | C-CERA C                 | CC725CH1H-102J0               | 1 | 342021024R1                |
| C354         | C-CERA C                 | CC725CH1H-102J0               | 1 | 342021024R1                |
| C355         | C-CERA C                 | CC725CH1H-102J0               | 1 | 342021024R1                |
| C365         | C-CERA C                 | CC725CH1H-102J0               | 1 | 342021024R1                |
| C366         | C-CERA C                 | CC725CH1H-102J0               | 1 | 342021024R1                |
| C368         | C-CERA C                 | CC725CH1H-102J0               | 1 | 342021024R1                |
| C369         | C-CERA C                 | CC725CH1H-102J0               | 1 | 342021024R1                |
| C400         | CHIP ELECT C             | CEWX25V-100M                  | 1 | 398151017R2                |
| C413         | C-CERA C                 | CK725B0J-106K                 | 1 | 332091065R2                |
| C414         | CHIP TANTAL              | TCSCS1C106MAAR                | 1 | 396541007R2                |
| C415         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C416         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C417         | C-CERA C                 | CK725B1E-103K0                | 1 | 332021035R1                |
| C418         | C-CERA C                 | CK725B1E-103K0                | 1 | 332021035R1                |
| C420         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C421         | CHIP TANTAL              | TCSCS1C106MAAR                | 1 | 396541007R2                |
| C422         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C423         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C424         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C425         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C426         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C427         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C428         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C429         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C430         | CHIP TANTAL              | TCSCS1C106MAAR                | 1 | 396541007R2                |
| C431         | C-CERA C                 | CK725B0J-106K                 | 1 | 332091065R2                |
| C432         | C-CERA C                 | CK725B0J-106K                 | 1 | 332091065R2                |
| C433         | CHIP TANTAL              | TCSCS1C106MAAR                | 1 | 396541007R2                |
| C434         | C-CERA C                 | CK725B0J-106K                 | 1 | 332091065R2                |
| C435         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C436         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
| C437         | C-CERA C                 | CK725B1C-104K0                | 1 | 332011045R1                |
|              |                          |                               |   |                            |

| C438         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
|--------------|----------------------|----------------------------------|---|----------------------------|
| C439         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C440         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C441         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C449         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C450         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C450         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C451         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C452         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C454         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C455         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C456         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C457         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C457         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C459         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C460         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C460         | C-CERA C             | CK725B1C-104K0<br>CK725B1C-104K0 | 1 | 332011045R1                |
| C462         |                      |                                  | 1 |                            |
|              | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C463<br>C464 | C-CERA C<br>C-CERA C | CK725B1C-104K0<br>CK725B1C-104K0 | 1 | 332011045R1<br>332011045R1 |
| C465         | C-CERA C             | CK725B1C-104K0<br>CK725B1C-104K0 | 1 | 332011045R1<br>332011045R1 |
|              |                      |                                  |   |                            |
| C466         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C467         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C468         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C469         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C470         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C471         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C472         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C473         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C474         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C475         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C476         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C477         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C478         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C479         | C-CERA C             | CK725B0J-106K                    | 1 | 332091065R2                |
| C480         | C-CERA C             | CK725B0J-106K                    | 1 | 332091065R2                |
| C490         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C491         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C492         | C-CERA C             | CK725B0J-106K                    | 1 | 332091065R2                |
| C493         | C-CERA C             | CK725B0J-106K                    | 1 | 332091065R2                |
| C497         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C498         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C499         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C506         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |
| C507         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C510         | CHIP TANTAL          | TCSCS1C476MDAR                   | 1 | 396544707R2                |
| C511         | C-CERA C             | CK725B1C-104K0                   | 1 | 332011045R1                |
| C512         | CHIP TANTAL          | TCSCS1C106MAAR                   | 1 | 396541007R2                |

| C513 | C-CERA C     | CK725B1C-104K0 | 1 | 332011045R1 |
|------|--------------|----------------|---|-------------|
| C513 | C-CERA C     | CK725BIC-104K0 | 1 | 332091065R2 |
| C515 | CHIP TANTAL  | TCSCS1A476MBAR | 1 | 396534707R2 |
| C516 | CHIP ELECT C | CEWX6.3V-100M  | 1 | 398121017R2 |
| C517 | CHIP ELECT C | CEWX16V-100M   | 1 | 398141017R2 |
| C518 | CHIP ELECT C | CEWX16V-100M   | 1 | 398141017R2 |
| C519 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |
| C520 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |
| C521 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |
| C522 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |
| C528 | C-CERA C     | CK725B1C-104K0 | 1 | 332011045R1 |
| C532 | C-CERA C     | CK725B1C-104K0 | 1 | 332011045R1 |
| C533 | CHIP TANTAL  | TCSCS1C226MBAR | 1 | 396542207R2 |
| C534 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |
| C535 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |
| R200 | C-CARBON R   | RN72K1J-103JE0 | 1 | 435011034R1 |
| R201 | C-CARBON R   | RN72K1J-000JE0 | 1 | 435010004R1 |
| R202 | C-CARBON R   | RN72K1J-562JE0 | 1 | 435015624R1 |
| R203 | C-CARBON R   | RN72K1J-562DE0 | 1 | 435015621R1 |
| R204 | C-CARBON R   | RN72K1J-331JE0 | 1 | 435013314R1 |
| R205 | C-CARBON R   | RN72K1J-331JE0 | 1 | 435013314R1 |
| R206 | C-CARBON R   | RN72K1J-105JE0 | 1 | 435011054R1 |
| R207 | C-CARBON R   | RN72K1J-105JE0 | 1 | 435011054R1 |
| R208 | C-CARBON R   | RN72K1J-472JE0 | 1 | 435014724R1 |
| R209 | C-CARBON R   | RN72K1J-472JE0 | 1 | 435014724R1 |
| R210 | C-CARBON R   | RN72K1J-470JE0 | 1 | 435014704R1 |
| R211 | C-CARBON R   | RN72K1J-332JE0 | 1 | 435013324R1 |
| R212 | C-CARBON R   | RN72K1J-222JE0 | 1 | 435012224R1 |
| R213 | C-CARBON R   | RN72K1J-000JE0 | 1 | 435010004R1 |
| R214 | C-CARBON R   | RN72K1J-152JE0 | 1 | 435011524R1 |
| R215 | C-CARBON R   | RN72K1J-182JE0 | 1 | 435011824R1 |
| R216 | C-CARBON R   | RN72K1J-104JE0 | 1 | 435011044R1 |
| R217 | C-CARBON R   | RN72K1J-223JE0 | 1 | 435012234R1 |
| R218 | C-CARBON R   | RN72K1J-332JE0 | 1 | 435013324R1 |
| R219 | C-CARBON R   | RN72K1J-222JE0 | 1 | 435012224R1 |
| R220 | C-CARBON R   | RN72K1J-470JE0 | 1 | 435014704R1 |
| R221 | C-CARBON R   | RN72K1J-470JE0 | 1 | 435014704R1 |
| R222 | C-CARBON R   | RN72K1J-470JE0 | 1 | 435014704R1 |
| R223 | C-CARBON R   | RN72K1J-470JE0 | 1 | 435014704R1 |
| R224 | C-CARBON R   | RN72K1J-152JE0 | 1 | 435011524R1 |
| R225 | C-CARBON R   | RN72K1J-182JE0 | 1 | 435011824R1 |
| R226 | C-CARBON R   | RN72K1J-104JE0 | 1 | 435011044R1 |
| R227 | C-CARBON R   | RN72K1J-223JE0 | 1 | 435012234R1 |
| R228 | C-CARBON R   | RN72K1J-000JE0 | 1 | 435010004R1 |
| R229 | C-CARBON R   | RN72K1J-000JE0 | 1 | 435010004R1 |
| R232 | C-CARBON R   | RN72K1J-472JE0 | 1 | 435014724R1 |
| R233 | C-CARBON R   | RN72K1J-472JE0 | 1 | 435014724R1 |
| R235 | C-CARBON R   | RN72K1J-105JE0 | 1 | 435011054R1 |
|      |              |                |   |             |

| R236         | C-R NET    | RM7LJ470X04                      | 1             | 43484747004R2              |  |
|--------------|------------|----------------------------------|---------------|----------------------------|--|
| R237         | C-R NET    | RM7LJ470X04                      | 1             | 43484747004R2              |  |
| R238         | C-CARBON R | RN72K1J-470JE0                   | 1             | 435014704R1                |  |
| R239         | C-R NET    | RM7LJ470X04                      | 1             | 43484747004R2              |  |
| R240         | C-R NET    | RM7LJ470X04                      | 1             | 43484747004R2              |  |
| R241         | C-CARBON R | RN72K1J-103JE0                   | 1             | 435011034R1                |  |
| R242         | C-CARBON R | RN72K1J-103JE0                   | 1             | 435011034R1                |  |
| R243         | C-R NET    | RM7LJ470X04                      | 1             | 43484747004R2              |  |
| R244         | C-R NET    | RM7LJ470X04                      | 1             | 43484747004R2              |  |
| R245         | C-CARBON R | RN72K1J-102JE0                   | 1             | 435011024R1                |  |
| R246         | C-CARBON R | RN72K1J-104JE0                   | 1             | 435011044R1                |  |
| R247         | C-CARBON R | RN72K1J-103JE0                   | <u>.</u><br>1 | 435011034R1                |  |
| R249         | C-CARBON R | RN72K1J-104JE0                   | <u>-</u> 1    | 435011044R1                |  |
| R251         | C-CARBON R | RN72K1J-104JE0                   | 1             | 435011044R1                |  |
| R252         | C-CARBON R | RN72K1J-104JE0                   | 1             | 435011044R1                |  |
| R253         | C-CARBON R | RN72K1J-000JE0                   | 1             | 435010004R1                |  |
| R254         | C-CARBON R | RN72K1J-000JE0                   | 1             | 435010004R1                |  |
| R255         | C-CARBON R | RN72K1J-000JE0                   | 1             | 435010004R1                |  |
| R256         | C-CARBON R | RN72K1J-000JE0                   | 1             | 435010004R1                |  |
| R258         | C-CARBON R | RN72K1J-0003E0                   | 1             | 435011024R1                |  |
| R259         | C-CARBON R | RN72K1J-470JE0                   | 1             | 435014704R1                |  |
| R260         | C-CARBON R | RN72K1J-4703E0<br>RN72K1J-102JE0 | 1             | 435011024R1                |  |
| R261         | C-R NET    | RM7LJ470X04                      | 1             | 43484747004R2              |  |
| R262         | C-CARBON R | RN72K1J-102JE0                   | 1             | 435011024R1                |  |
| R263         | C-CARBON R | RN72K1J-102JE0<br>RN72K1J-102JE0 | 1             | 435011024R1<br>435011024R1 |  |
| R264         | C-R NET    | RM7LJ470X04                      | 1             | 43484747004R2              |  |
| R265         | C-CARBON R | RN72K1J-102JE0                   | 1             | 435011024R1                |  |
| R266         | C-CARBON R | RN72K1J-102JE0<br>RN72K1J-103JE0 | 1             | 435011024R1<br>435011034R1 |  |
| R267         | C-CARBON R | RN72K1J-103JE0<br>RN72K1J-103JE0 | 1             | 435011034R1<br>435011034R1 |  |
|              |            |                                  |               |                            |  |
| R268         | C-CARBON R | RN72K1J-103JE0                   | 1             | 435011034R1                |  |
| R269         | C-CARBON R | RN72K1J-103JE0                   | 1             | 435011034R1                |  |
| R271         | C-CARBON R | RN72K1J-103JE0                   | 1             | 435011034R1                |  |
| R272<br>R273 | C-CARBON R | RN72K1J-103JE0                   |               | 435011034R1                |  |
| R274         | C-R NET    | RM7LJ470X04                      | 1             | 43484747004R2              |  |
|              | C-CARBON R | RN72K1J-220JE0                   | 1             | 435012204R1                |  |
| R275         | C-CARBON R | RN72K1J-103JE0                   | 1             | 435011034R1                |  |
| R276         | C-CARBON R | RN72K1J-103JE0                   | 1             | 435011034R1                |  |
| R277         | C-CARBON R | RN72K1J-102JE0                   | 1             | 435011024R1                |  |
| R279         | C-CARBON R | RN72K1J-103JE0                   | 1             | 435011034R1                |  |
| R280         | C-CARBON R | RN72K1J-103JE0                   | 1             | 435011034R1                |  |
| R286         | C-CARBON R | RN72K1J-000JE0                   | 1             | 435010004R1                |  |
| R289         | C-CARBON R | RN72K1J-103JE0                   | 1             | 435011034R1                |  |
| R290         | C-CARBON R | RN72K1J-332JE0                   | 1             | 435013324R1                |  |
| R291         | C-CARBON R | RN72K1J-471JE0                   | 1             | 435014714R1                |  |
| R292         | C-CARBON R | RN72K1J-104JE0                   | 1             | 435011044R1                |  |
| R293         | C-CARBON R | RN72K1J-104JE0                   | 1             | 435011044R1                |  |
| R294         | C-CARBON R | RN72K1J-103JE0                   | 1             | 435011034R1                |  |
| R295         | C-CARBON R | RN72K1J-103JE0                   | 1             | 435011034R1                |  |
|              |            |                                  |               |                            |  |

| R296 | C-CARBON R            | RN72K1J-103JE0             | 1 | 435011034R1                    |  |
|------|-----------------------|----------------------------|---|--------------------------------|--|
| R297 | C-CARBON R            | RN72K1J-103JE0             | 1 | 435011034R1                    |  |
| R298 | C-CARBON R            | RN72K1J-103JE0             | 1 | 435011034R1                    |  |
| R301 | C-CARBON R            | RN72K1J-103JE0             | 1 | 435011034R1                    |  |
| R302 | C-CARBON R            | MCR03EZPF49R9(49.9 1%)     | 1 | 4100037R2                      |  |
| R303 | C-CARBON R            | MCR03EZPF49R9(49.9 1%)     | 1 | 4100037R2                      |  |
| R304 | C-CARBON R            | MCR03EZPF49R9(49.9 1%)     | 1 | 4100037R2                      |  |
| R305 | C-CARBON R            | MCR03EZPF49R9(49.9 1%)     | 1 | 4100037R2                      |  |
| R306 | C-CARBON R            | RN72K1J-103JE0             | 1 | 435011034R1                    |  |
| R308 | C-CARBON R            | RN72K1J-000JE0             | 1 | 435010004R1                    |  |
| R315 | C-CARBON R            | RN72K1J-000JE0             | 1 | 435010004R1                    |  |
| R318 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R319 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R320 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R321 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R322 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R323 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R324 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R325 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R326 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R327 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R328 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R329 | C-R NET               | RM7LJ470X04<br>RM7LJ470X04 | 1 | 43484747004R2<br>43484747004R2 |  |
| R329 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2<br>43484747004R2 |  |
| R331 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2<br>43484747004R2 |  |
| R332 | C-CARBON R            | RN72K1J-103JE0             | 1 | 435011034R1                    |  |
| R333 | C-CARBON R<br>C-R NET | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R334 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2<br>43484747004R2 |  |
| R335 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2<br>43484747004R2 |  |
|      |                       |                            |   |                                |  |
| R336 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R337 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R338 | C-R NET               | RM7LJ470X04                | 1 | 43484747004R2                  |  |
| R339 | C-CARBON R            | RN72K1J-000JE0             |   | 435010004R1                    |  |
| R340 | C-CARBON R            | RN72K1J-470JE0             | 1 | 435014704R1                    |  |
| R341 | C-CARBON R            | RN72K1J-470JE0             | 1 | 435014704R1                    |  |
| R344 | C-CARBON R            | RN72K1J-471JE0             | 1 | 435014714R1                    |  |
| R345 | C-CARBON R            | RN72K1J-105JE0             | 1 | 435011054R1                    |  |
| R346 | C-CARBON R            | RN72K1J-103JE0             | 1 | 435011034R1                    |  |
| R347 | C-CARBON R            | RN72K1J-103JE0             | 1 | 435011034R1                    |  |
| R349 | C-CARBON R            | RN72K1J-470JE0             | 1 | 435014704R1                    |  |
| R351 | C-CARBON R            | RN72K1J-103JE0             | 1 | 435011034R1                    |  |
| R352 | C-CARBON R            | RN72K1J-470JE0             | 1 | 435014704R1                    |  |
| R353 | C-CARBON R            | RN72K1J-330JE0             | 1 | 435013304R1                    |  |
| R354 | C-CARBON R            | RN72K1J-562DE0             | 1 | 435015621R1                    |  |
| R356 | C-CARBON R            | RN72K1J-470JE0             | 1 | 435014704R1                    |  |
| R357 | C-CARBON R            | RN72K1J-000JE0             | 1 | 435010004R1                    |  |
| R359 | C-CARBON R            | RN72K1J-000JE0             | 1 | 435010004R1                    |  |
| R362 | C-CARBON R            | RN72K1J-000JE0             | 1 | 435010004R1                    |  |
|      |                       |                            |   |                                |  |

| D260           | C CAPPON P | DNZW11 000F0             |   | 42501000 AD 1             |
|----------------|------------|--------------------------|---|---------------------------|
| R369           | C-CARBON R | RN72K1J-000JE0           | 1 | 435010004R1               |
| R372           | C-CARBON R | RN72K1J-000JE0           | 1 | 435010004R1               |
| R373           | C-CARBON R | RN72K1J-000JE0           | 1 | 435010004R1               |
| R374           | C-CARBON R | RN72K1J-000JE0           | 1 | 435010004R1               |
| R376           | C-CARBON R | RN72K1J-470JE0           | 1 | 435014704R1               |
| R385           | C-CARBON R | RN72K1J-000JE0           | 1 | 435010004R1               |
| R390           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R391           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R392           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R393           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R394           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R395           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R396           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R397           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R398           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R399           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R400           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R401           | C-CARBON R | RN72K1J-822JE0           | 1 | 435018224R1               |
| R402           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R403           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R404           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R405           | C-CARBON R | RN72K1J-822JE0           | 1 | 435018224R1               |
| R406           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R407           | C-CARBON R | RN72K1J-822JE            | 1 | 435038224R1               |
| R408           | C-CARBON R | RN72K1J-470JE0           | 1 | 435014704R1               |
| R410           | C-CARBON R | RN72K1J-153JE0           | 1 | 435011534R1               |
| R411           | C-CARBON R | RN72K1J-153JE0           | 1 | 435011534R1               |
| R412           | C-CARBON R | RN72K1J-223JE0           | 1 | 435012234R1               |
| R413           | C-CARBON R | RN72K1J-223JE0           | 1 | 435012234R1               |
| R414           | C-CARBON R | RN72K1J-000JE            | 1 | 435030004R1               |
| R415           | C-CARBON R | RN72K1J-000JE            | 1 | 435030004R1               |
| R416           | C-CARBON R | RN72K1J-000JE            | 1 | 435030004R1               |
| R420           | C-CARBON R | RN72K1J-153JE0           | 1 | 435011534R1               |
| R421           | C-CARBON R | RN72K1J-153JE0           | 1 | 435011534R1               |
| R424           | C-CARBON R | RN72K1J-000JE            | 1 | 435030004R1               |
| R425           | C-CARBON R | RN72K1J-000JE            | 1 | 435030004R1               |
| R428           | C-CARBON R | RN72K1J-220JE            | 1 | 435032204R1               |
| R429           | C-CARBON R | RN72K1J-220JE            | 1 | 435032204R1               |
| R431           | C-CARBON R | RN72K1J-000JE0           | 1 | 435010004R1               |
| E200           | TRM(SCREW) | NEJITANSI M3             | 1 | 25065425                  |
| E201           | TRM(SCREW) | NEJITANSI M3             | 1 | 25065425                  |
| E202           | TRM(SCREW) | NEJITANSI M3             | 1 | 25065425                  |
| E203           | TRM(SCREW) | NEJITANSI M3             | 1 | 25065425                  |
| P200           | SOCKET     | J0026D21NL               | 1 | 25053250                  |
| P201A          | PLUG       | NPLG-4P917               | 1 | 25055964R2                |
| P201A<br>P202A | PLUG       | NPLG-4F917<br>NPLG-6P919 | 1 | 25055966R2                |
| P202A<br>P204A | PLUG       | NPLG-5P919<br>NPLG-5P918 | 1 | 25055966R2<br>25055965R2  |
| P204A<br>P205A | SOCKET     | NSCT-9P2472              | 1 | 250525765R2<br>25052575R2 |
| r203A          | SUCKEI     | NSC1-9P2412              | 1 | ZJUJZJ I JKZ              |

| P207 | SOCKET | 09FMN-SMT-A-TF | 1 | 25052826R2 |  |
|------|--------|----------------|---|------------|--|
| P208 | SOCKET | NSCT-15P2478   | 1 | 25052581R2 |  |

# TX-NR906/NA906

# PACKING PROCEDURE PARTS LIST

| REF. NO. | PART NAME  | DESCRIPTION                 | Q'TY | PART NO. (SN) | REMARKS                            |
|----------|------------|-----------------------------|------|---------------|------------------------------------|
| A600     | SHEET      |                             | 1    | 29095906      |                                    |
| 602      | TAPE       | (SEROHAN)NITTO NO.29        | 2    | 29110149      |                                    |
| .603     | SHEET      | T0.515*1300*900             | 1    | 29096066      |                                    |
| .604     | POLY BAG   | (W1020xD770)                | 1    | 29100253      |                                    |
| 608      | PAD        | AS                          | 1    | 29092384A     |                                    |
| .610     | CARTON     | TXNR906MDC                  | 1    | 29054920A     | <dc, dd=""></dc,>                  |
| .610     | CARTON     | TXNR906MMP                  | 1    | 29054921A     | <mp, dt="" mt,=""></mp,>           |
| 610      | CARTON     | TXNA906MMR                  | 1    | 29054925A     | <na906></na906>                    |
| .614a    | UPC LABEL  | TXNR906BDC                  | 1    | 29390434      | <dc></dc>                          |
| .614a    | UPC LABEL  | TXNR906SDD                  | 1    | 29390435      | <dd></dd>                          |
| 614a     | EAN LABEL  | TXNR906BMP                  | 1    | 29390439      | (B) <mp></mp>                      |
| 614a     | EAN LABEL  | TXNR906SMP                  | 1    | 29390440      | (S) <mp></mp>                      |
| 614a     | EAN LABEL  | TXNR906GDT                  | 1    | 29390445      | <dt></dt>                          |
| 614a     | EAN LABEL  | TXNR906SMT                  | 1    | 29390447      | (S) <mt></mt>                      |
| 614a     | EAN LABEL  | TXSR906GMT                  | 1    | 29390448      | (G) <mt></mt>                      |
| 614a     | EAN LABEL  | TXNA906BMMR                 | 1    | 29390631      | (B) <na906></na906>                |
| 614a     | EAN LABEL  | TXNA906GMR                  | 1    | 29390450      | (G) <na906></na906>                |
| 616      | LABEL      | (APV)                       | 1    | 29390190      | <na906></na906>                    |
| 618      | LABEL      | (CHINA)                     | 1    | 29390648      | (B) <na906></na906>                |
| 618      | LABEL      | (CHINA)                     | 1    | 29390395      | (G) <na906></na906>                |
| 620      | CARTON     | (ACC)                       | 1    | 29054470      |                                    |
| 622      | PP TAPE    | W50 SBT-70                  | 1    | 29110200      |                                    |
| 624      | STAPLE     | FUKAN-BARI(1000KO)          | 4    | 282321        |                                    |
| 803      | POLY BAG   | w250xd350                   | 1    | 29100250A     |                                    |
| 810      | POLY BAG   | w250xd350                   | 1    | 29100250A     | <dc, mp=""></dc,>                  |
| 819      | INS MANUAL | U9(RC-687M-692M)            | 1    | 29344467      |                                    |
| 832      | INS MANUAL | U3EnFrEs(XM/SIRIUS_876/906) | 1    | 29344772      | <dc, dd=""></dc,>                  |
| .833     | INST SHEET | En(XM RADIO)                | 1    | 29355602      | <dc, dd=""></dc,>                  |
| 834      | INS MANUAL | En(TX-SR876/NR906)          | 1    | 29344753A     | <nr906></nr906>                    |
| 835      | INS MANUAL | En(QSS_TX-SR876/NR906)      | 1    | 29344760      |                                    |
| 836      | INS MANUAL | Ct(TX-SR876/NR906)          | 1    | 29344757      | <dt, mt=""></dt,>                  |
| 837      | INS MANUAL | U2FrEs(TX-SR876/NR906)      | 1    | 29344754A     | <dc, mp=""></dc,>                  |
| 838      | INS MANUAL | U2ItDe(TX-SR876/NR906)      | 1    | 29344755      | <mp></mp>                          |
| 839      | INS MANUAL | U2NISv(TX-SR876/NR906)      | 1    | 29344756      | <mp></mp>                          |
| 840      | INS MANUAL | En(TX-SA876/NA906)          | 1    | 29344771      | <nr906></nr906>                    |
| 841      | INS MANUAL | Cs(TX-SA876/NA906)          | 1    | 29344758      | <na906></na906>                    |
| 842      | INS MANUAL | Cs(QSS_TX-SA876/NA906)      | 1    | 29344761      | <na906></na906>                    |
| 843      | ANT COIL   | NMA-3064                    | 1    | 232201        | <nr906></nr906>                    |
| 844      | BATTERY    | R6/AA(UM-3)                 | 3    | 3010194       |                                    |
| .844 or  | BATTERY    | R6/AA(UM-3)                 | (3)  | 3010054       |                                    |
| 845      | FM ANT AS  | Type W                      | 1    | 292191        | <nr906></nr906>                    |
| 846      | INST SHEET | U3(876RIHD)EnFrEs           | 1    | 29355725      | <dc, dd=""></dc,>                  |
| .847     | INST SHEET | En(876RIHD)notUS            | 1    | 29355726      | <mp, dt,="" mt,="" na906=""></mp,> |

| A848 | POLY BAG   | t0.1*70*100                 | 1 | 29100217A |                                    |
|------|------------|-----------------------------|---|-----------|------------------------------------|
| A849 | INST SHEET | U8(876RIHD)FrEsItDeNlSvCtCs | 1 | 29355727  | <mp, dt,="" mt,="" na906=""></mp,> |
| A852 | LABEL      | (SPCABLE)                   | 1 | 29390189  |                                    |
| A854 | HANDBILL   | (DS-A2X)US                  | 1 | 29380150  | <dc, dd=""></dc,>                  |
| A854 | HANDBILL   | (DS-A2X)EU                  | 1 | 29380151  | <mp></mp>                          |
| A856 | WRNTY CARD | (ONKYO)                     | 1 | 29365135  | <dc, dd=""></dc,>                  |
| A856 | WRNTY CARD | (ONKYO-CH)                  | 1 | 29365098B | <na906></na906>                    |
| A866 | INST SHEET | WEEE                        | 1 | 29355537  | <mp></mp>                          |
| A874 | INST SHEET | U2EnJa(SOFTWARENOTICE_905)  | 1 | 29355663A |                                    |
| A876 | INST SHEET | CHINA ROHS                  | 1 | 29355616A | <na906></na906>                    |
| A880 | HANDBILL   | (SIRIUS)                    | 1 | 29380149  | <dc, dd=""></dc,>                  |
| A881 | INST SHEET | En(I-RADIOSETUP)            | 1 | 29355666  |                                    |
| A882 | INST SHEET | U8(I-RADIOSETUP)            | 1 | 29355667  |                                    |
| A890 | REMO CON   | RC-687M                     | 1 | 24140687  |                                    |
| A891 | MIC        | MIC-7000                    | 1 | 245044    |                                    |
| P901 | AC CORD    | AS-UC-2                     | 1 | 253301VOL | !, <dc, dd=""></dc,>               |
| P901 | AC CORD    | AS-CEE-3                    | 1 | 253298VOL | !, <mp, mt=""></mp,>               |
| P901 | AC CORD    | AS-CNS                      | 1 | 253432VOL | !, <dt></dt>                       |
| P901 | AC CORD    | AS-CCC                      | 1 | 253358VOL | !, <na906></na906>                 |

#### **ONKYO CORPORATION**

Sales & Product Planning Div.: 2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN Tel: 072-831-8023 Fax: 072-831-8124

## **ONKYO U.S.A. CORPORATION**

18 Park Way, Upper Saddle River, N.J. 07458, U.S.A. Tel: 201-785-2600 Fax: 201-785-2650 http://www.us.onkyo.com/

# **ONKYO EUROPE ELECTRONICS GmbH**

Liegnitzerstrasse 6, 82194 Groebenzell, GERMANY
Tel: +49-8142-4401-0 Fax: +49-8142-4401-555 http://www.eu.onkyo.com/

# **ONKYO EUROPE UK Office**

Suite 1, Gregories Court, Gregories Road, Beaconsfield, Buckinghamshire, HP9 1HQ UNITED KINGDOM Tel: +44-(0)1494-681515 Fax: +44(0)-1494-680452

## **ONKYO CHINA LIMITED**

Units 2102-2107, Metroplaza Tower I, 223 Hing Fong Road, Kwai Chung, N.T., HONG KONG Tel: 852-2429-3118 Fax: 852-2428-9039 http://www.ch.onkyo.com/

